
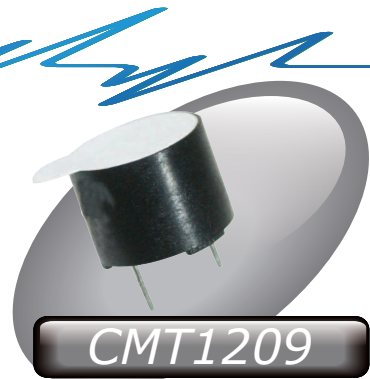





# Magnetic Transducer (AC)

Washing Label






CMT1209

| Canopus Part no. | Operating Voltage (V) | Rated Voltage (V) | Max Rated Current (mA) | Coil Resistance ( $\Omega$ ) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Temperature ( $^{\circ}$ C) | Housing | Weight (g) |
|------------------|-----------------------|-------------------|------------------------|------------------------------|------------------------|-------------------------|---------------------------------------|---------|------------|
| CMT1209A2048NP   | 1 ~ 2                 | 1.5               | 70                     | 6.5 $\pm$ 1                  | 75 at 10cm             | 2048                    | -20 ~ +60                             | Noryl   | 2          |
| CMT1209A2400NP   | 1 ~ 3                 | 1.5               | 70                     | 6.5 $\pm$ 1                  | 75 at 10cm             | 2400                    | -20 ~ +60                             | Noryl   | 2          |
| CMT1209E2048NP   | 3 ~ 8                 | 5                 | 40                     | 47 $\pm$ 5                   | 85 at 10cm             | 2048                    | -40 ~ +85                             | Noryl   | 2          |
| CMT1209E2200NP   | 3 ~ 8                 | 5                 | 40                     | 47 $\pm$ 5                   | 85 at 10cm             | 2200                    | -40 ~ +85                             | Noryl   | 2          |
| CMT1209E2400NP   | 3 ~ 8                 | 5                 | 40                     | 47 $\pm$ 5                   | 85 at 10cm             | 2400                    | -20 ~ +60                             | Noryl   | 2          |
| CMT1209F2200NP   | 4 ~ 8                 | 6                 | 40                     | 50 $\pm$ 5                   | 85 at 10cm             | 2200                    | -40 ~ +85                             | Noryl   | 2          |
| CMT1209H2048NP   | 6 ~ 15                | 12                | 40                     | 140 $\pm$ 14                 | 85 at 10cm             | 2048                    | -20 ~ +60                             | Noryl   | 2          |
| CMT1209H2400NP   | 6 ~ 15                | 12                | 40                     | 140 $\pm$ 14                 | 85 at 10cm             | 2400                    | -25 ~ +70                             | Noryl   | 2          |







Washing Label




CMT1210

| Canopus Part no. | Operating Voltage (V) | Rated Voltage (V) | Max Rated Current (mA) | Coil Resistance ( $\Omega$ ) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Temperature ( $^{\circ}$ C) | Housing | Weight (g) |
|------------------|-----------------------|-------------------|------------------------|------------------------------|------------------------|-------------------------|---------------------------------------|---------|------------|
| CMT1210A2200TP   | 0.8 ~ 2.5             | 1.5               | 100                    | 3.5 $\pm$ 1                  | 85 at 10cm             | 2200                    | -20 ~ +70                             | PBT     | 2          |
| CMT1210A2400TP   | 1 ~ 2                 | 1.5               | 30                     | 16 $\pm$ 4.5                 | 80 at 10cm             | 2400                    | -40 ~ +85                             | PBT     | 2          |
| CMT1210A2800TP   | 1 ~ 3                 | 1.5               | 30                     | 16 $\pm$ 4.5                 | 85 at 10cm             | 2800                    | -20 ~ +70                             | PBT     | 2          |
| CMT1210E2400TP   | 3 ~ 8                 | 5                 | 50                     | 40 $\pm$ 5                   | 85 at 10cm             | 2400                    | -40 ~ +85                             | PBT     | 2          |



CMT1213

| Canopus Part no. | Operating Voltage (V) | Rated Voltage (V) | Max Rated Current (mA) | Coil Resistance ( $\Omega$ ) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Temperature ( $^{\circ}$ C) | Housing | Weight (g) |
|------------------|-----------------------|-------------------|------------------------|------------------------------|------------------------|-------------------------|---------------------------------------|---------|------------|
| CMT1213A2048NP   | 1 ~ 2                 | 1.5               | 30                     | 16 $\pm$ 4.5                 | 80 at 10cm             | 2048                    | -20 ~ +60                             | Noryl   | 2          |



CANOPUS

**Your Efficient Supplier**  
[www.canopus.com.hk](http://www.canopus.com.hk)

TEL.: (852) 2806 2812

Fax: (852) 2652 2216