

**Product Features**

- GaN on SiC Broadband High Power Amplifier
- 20 ~ 500MHz Operation Bandwidth
- Small Signal Gain 41dB min.
- 160W Minimum . @ Psat

**Applications**

- General Purpose



Package Type : DP-100

**Description**

The power amplifier module is designed for Broadcasting, Telecommunication, Medical and Other markets.

Operating frequency range is from 20 ~ 500MHz.

Gallium Nitride on SiC technology is used and attached on an aluminum sub carrier. Full in/out matching for broadband performance is already applied.

Improved thermal handling by patented technology.

**Electrical Specifications @  $V_{CC} = 28V$ ;  $T_c = 45^\circ C$ ;  $Z_S = Z_L = 50\Omega$** 

PARAMETER	UNIT	MIN	TYP	MAX	CONDITION
Operating Frequency	MHz	20	-	500	-
Small Signal Gain	dB	41	43	45	-
Gain Variation vs Frequency	dBpp	-	$\pm 1$	$\pm 1.5$	-
P <sub>3dB</sub>	dBm	50	52	-	20 ~ 500MHz
OIP3 @ P <sub>o</sub> = +43dBm (1MHz Tone spacing, CW 2-Tone)	dBm	50	54	-	20 ~ 500 MHz
Input Return Loss	dB	-	-11	-7	-
N <sup>th</sup> Harmonic suppression	dBc	15	25	-	CW 1-tone @P <sub>o</sub> = P <sub>1dBm</sub>
Supply Voltage	V	27.5	28	30	V <sub>cc</sub> (=V <sub>ds</sub> )
Quiescent Current consumption	A	-	7	7.5	-
Current Consumption @ P <sub>3dB</sub>	A	-	11	13	CW 1-tone
On/Off Switching Time*	uS	-	3	5	On : TTL "Low"
					Off : TTL "High"(30mA@Disable)
Shut Down or Switch On/Off TTL Voltage**	V	0	-	0.5	On : TTL "Low"(Enable)
		2.5	5	5.5	Off : TTL "High"

**Note.**

\*. Gate On/Off : High speed switching

\*\*.. Drain On/Off : 300ms delay

**Absolute Maximum Ratings**

PARAMETER	UNIT	RATING
Input RF Power	dBm	15
Supply Voltage	V	30
Load Mismatch Value	-	3 : 1 @all load phase

\* Input Signal Condition : CW 1-Tone

**Environmental Characteristics**

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Case Temperature	°C	-10	-	80	Tc
Storage Temperature	°C	-40	-	105	Tstg
Vibration	MIL-STD-810G Method 514.6 ANNEX C				VI

**Ordering Information**

Part Number	Package
RWP03160-10	Pallet
RWP03160-1R	Pallet with Stainless Steel SMA Connectorized

\* RWP03160-1R is a SMA connectorized version of RWP03160-10. Electrical parameters are all same as RWP03160-10.

For more information, please contact RFHIC



**Mechanical Specifications**

PARAMETER	UNIT	TYP
Dimension	mm	120(L) x 65(W) x 16.7(H)
Weight	g	240
RWP03160-1R RF Connector	-	SMA Female
DC Connector	-	SMW420-06P
Cooling	-	External Heat-sink

\*Dimension and weight may change without notice.

## Typical Performance @ 25°C

Frequency	P1dB	P3dB	Psat	Current @P1dB	Current @P3dB	Current @Psat	Gp @ P3dB	PAE @ P3dB	N <sup>th</sup> Harmonic @Po = P1dBm		OIP3 @40dBm/Tone
									2 <sup>nd</sup> Har	3 <sup>rd</sup> Har	
(MHz)	(dBm)	(dBm)	(dBm)	(A)	(A)	(A)	(dB)	(%)	(dBc)		(dBm)
20	48.1	51.0	52.3	6.60	8.30	8.9	39.50	54.17	-43.2	-23.1	56.6
100	48.1	52.1	53.0	7.08	10.18	11.1	40.10	56.90	-40.0	-20.6	56.5
200	48.2	52.3	53.0	7.30	11.04	12.0	40.70	54.94	-46.1	-23.1	56.2
300	48.0	51.1	52.1	7.01	9.73	11.1	40.90	47.29	-35.2	-24.9	55.4
400	48.0	51.2	52.0	7.13	9.07	9.9	40.90	51.91	-38.9	-42.9	55.3
500	48.0	52.0	52.4	7.57	10.98	11.0	40.20	51.55	-57.9	-45.9	54.4

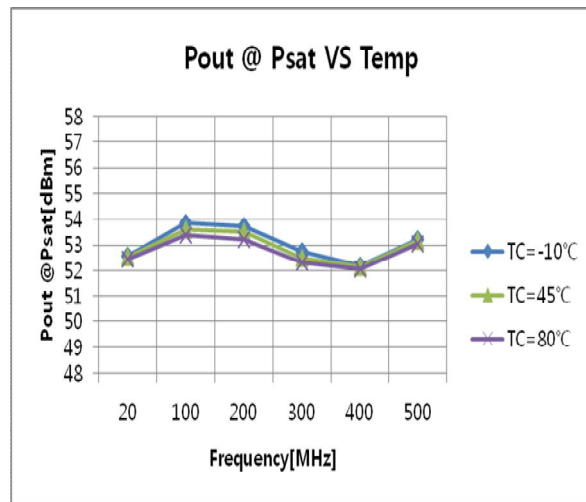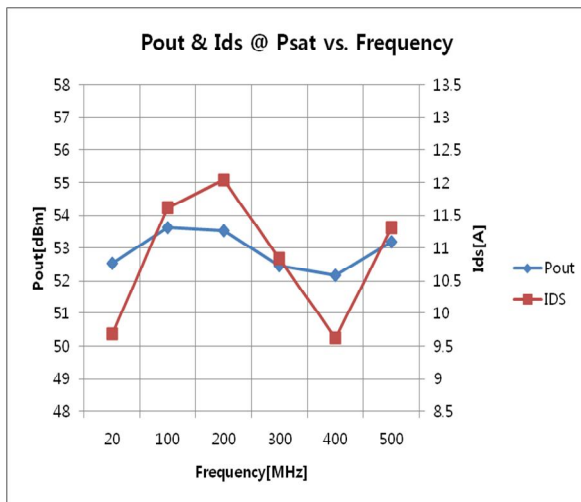


## Precautions

1. This product is designed to be used for broadband amplification.  
Heat generation is higher when there is no RF signal in the device.  
Therefore, the worst case scenario is when there is no RF signal, and the amplifier is “on” with current draw.  
The temperature must be calculated properly.  
Case temperature must maintain below 80°C.
2. Thermal Grease or Metal Thermal Interface Materials are recommended for heat dissipation.  
An example would be spreading thermal grease on the bottom of the device

Package Dimensions (Type: DP-100)

\* Unit: mm[inch] | Tolerance: ±0.2[.008]

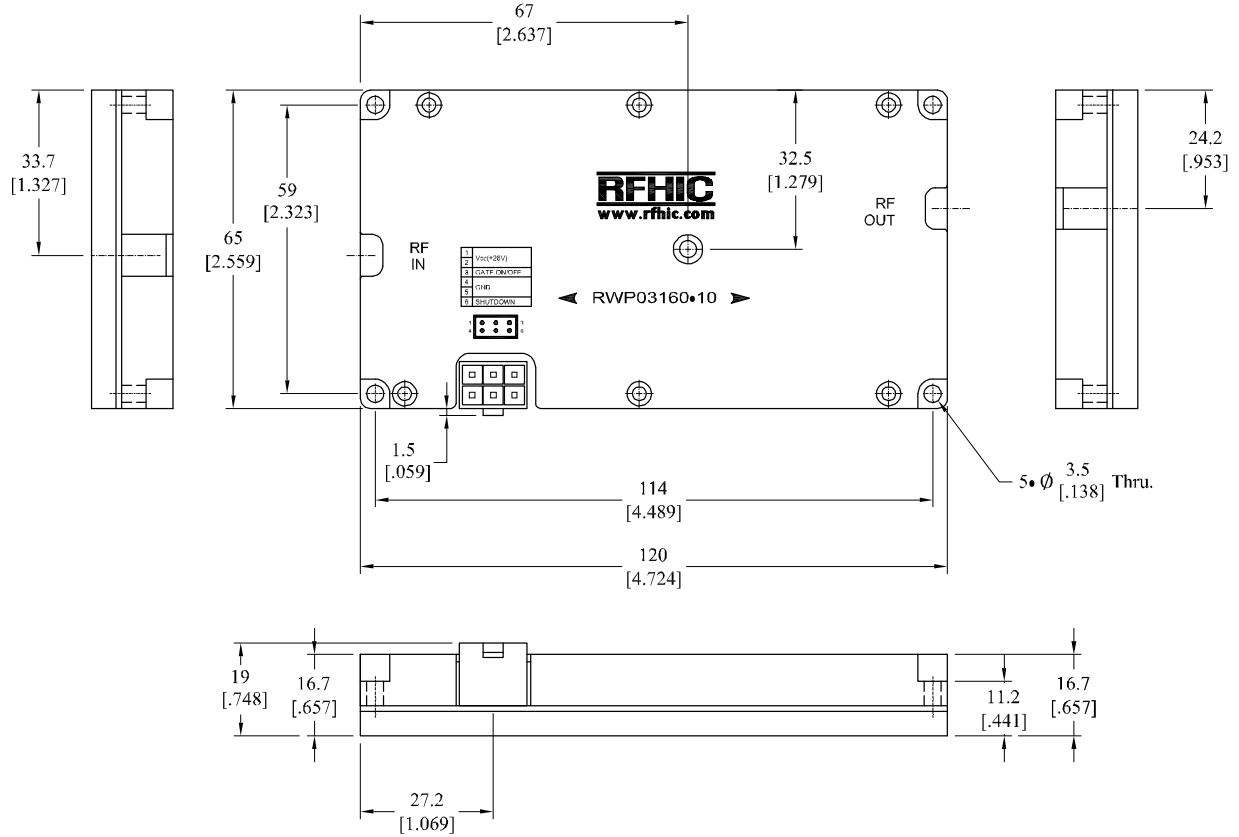

Interface Connector		
Pin No	Port Name	Function
1	Vcc(28V)	28VDC
2	Vcc(28V)	28VDC
3	Switch ON/OFF	Switching Time : 5us max
		Enable : TTL "Low" or Open, Disable : TTL "High" (Low : 0~0.5V, High : 2.5~5V)
		Disable Status : 20mA Current consumption
4	GND	DC Ground
5	GND	DC Ground
6	Shut Down	Enable : TTL "Low" or Open, Disable : TTL "High" (Low : 0~0.5V, High : 2.5~5V)
		Disable Status : 20mA Current consumption

\* Interface connector information : SMW420-06P(YEONHO Electronic, Wafer), SMH420-06(YEONHO Electronic, Housing)

\* Recommended Screw Torque : 8.0kgf.cm±1 using SEMS M3 15MM Bolt

**Revision History**

<b>Part Number</b>	<b>Release Date</b>	<b>Version</b>	<b>Modification</b>	<b>Data Sheet Status</b>
RWP03160-10	2014.5.23	1.7	Mechanical Specifications addition	-
RWP03160-10	2014.4.2	1.6	Mechanical Specifications	-
RWP03160-10	2014.1.7	1.5	Pallet with Stainless Steel Connectorized addition(Ordering Information)	-

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-250-5078.