


液晶之友 电话: 020-33819057  
Http://www.lcdfriends.com

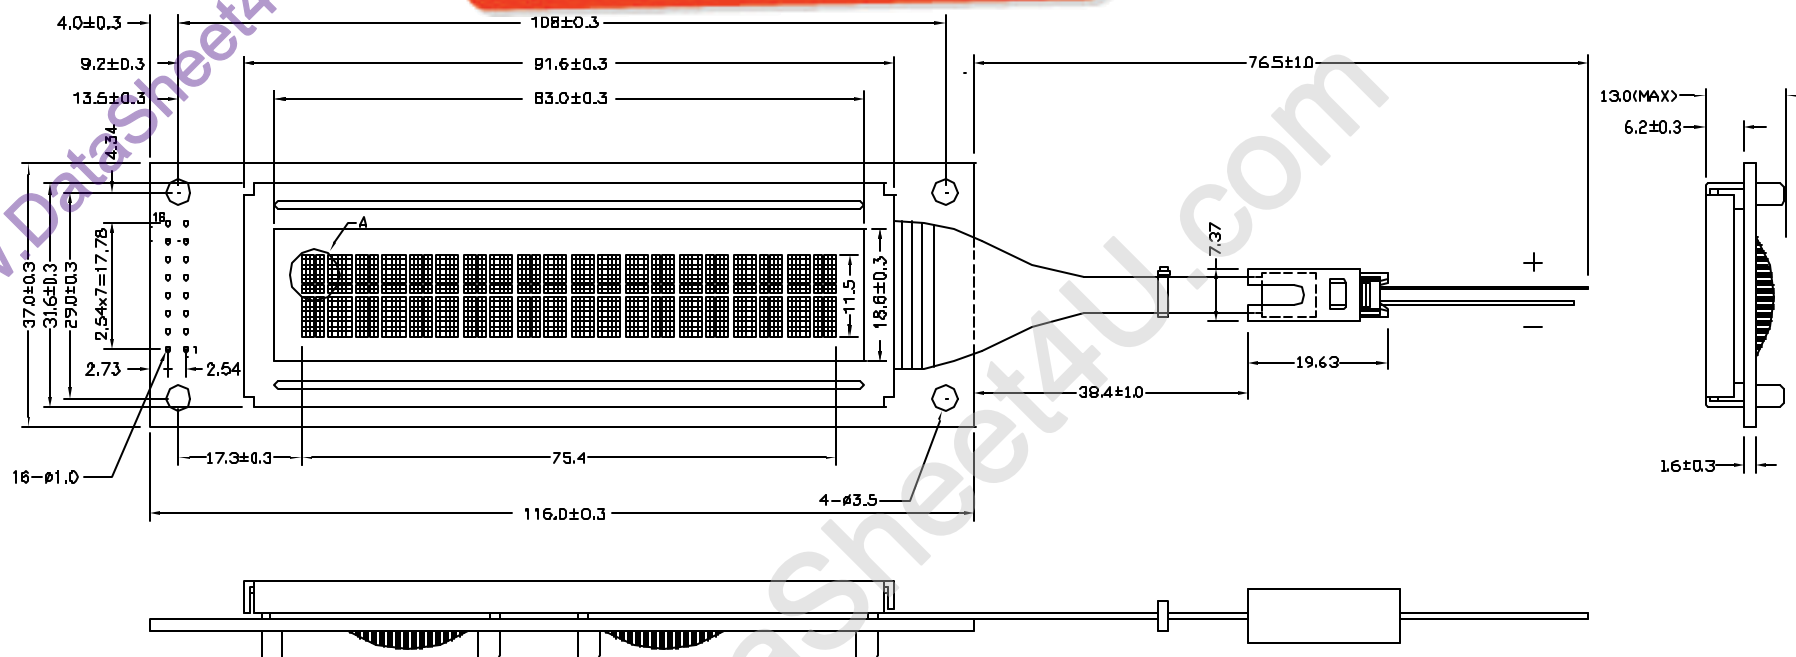


DETAIL A:

|     |     |     |    |     |   |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|----|-----|---|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| 1   | 2   | 3   | 4  | 5   | 6 | 7   | 8   | 9   | 10  | 11  | 12  | 13  | 14  | 15 | 16 |
| VSS | Vcc | Vee | RS | R/W | E | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | NC | NC |

NOTES:

- 1.DISPLAY TYPE: STN/Y-G MODE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANFLECTIVE/POSITIVE
- 4.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 5.LCD OPERATING VOLTAGE: 4.7V
- 6.OPERATING TEMP: 0°C-+50°C
- 7.STORAGE TEMP: -20°C-+60°C
- 8.CONTROLLER: S6A0069X01-C0CX(KS0066UP-00CC)
- 9.BACKLIGHT TYPE: FIBER OPTIC WITH ONE LED
- 10.BEZEL IS TO BE PAINTED BLACK
- 11.ALL UNMARKED TOLERANCE: ±0.3



TIAN-MA MICROELECTRONICS CO.

22/F., HANGDU Building, Shennan Road, Central, Shenzhen, China

|               |                        |  |
|---------------|------------------------|--|
| DRAWN BY:     | TITLE: TM202JBN6       |  |
| CHECKED BY:   | DWG NO: G-1            |  |
| APPROVED BY:  | DWG NAME: TM202JBN6G-1 |  |
| CONFIRMED BY: | SHEET NO: 01           |  |