


PNP Silicon AF Transistor

- For AF driver and output stages
- High collector current
- Low collector-emitter saturation voltage
- Complementary types: BCP 54M...BCP 56M(NPN)

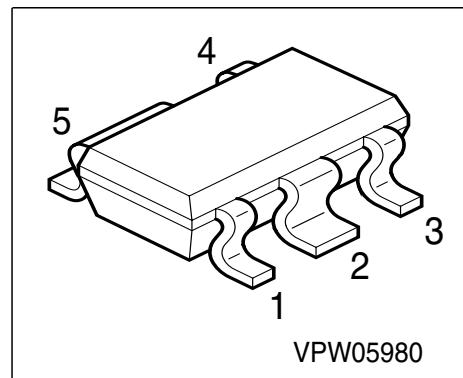

Type	Marking	Pin Configuration					Package
BCP 51M	AAs	1 = B	2 = C	3 = E	4=n.c.	5 = C	SCT-595
BCP 52M	AEs	1 = B	2 = C	3 = E	4=n.c.	5 = C	SCT-595
BCP 53M	AHs	1 = B	2 = C	3 = E	4=n.c.	5 = C	SCT-595

Maximum Ratings

Parameter	Symbol	BCP 51M	BCP 52M	BCP 53M	Unit
Collector-emitter voltage	V_{CEO}	45	60	80	V
Collector-base voltage	V_{CBO}	45	60	100	
Emitter-base voltage	V_{EBO}	5	5	5	
DC collector current	I_C	1			A
Peak collector current	I_{CM}	1.5			
Base current	I_B	100			mA
Peak base current	I_{BM}	200			
Total power dissipation, $T_S \leq 77^\circ\text{C}$	P_{tot}	1.7			W
Junction temperature	T_j	150			$^\circ\text{C}$
Storage temperature	T_{stg}	-65 ... 150			

Thermal Resistance

Junction ambient 1)	R_{thJA}	≤ 98	K/W
Junction - soldering point	R_{thJS}	≤ 43	

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 6cm² Cu


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 10 \text{ mA}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	45	-	-	V
		60	-	-	
		80	-	-	
Collector-base breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CBO}}$	45	-	-	
		60	-	-	
		100	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
		-	-	-	
Collector cutoff current $V_{CB} = 30 \text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
Collector cutoff current $V_{CB} = 30 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$	I_{CBO}	-	-	20	μA
DC current gain 1) $I_C = 5 \text{ mA}, V_{CE} = 2 \text{ V}$	h_{FE}	25	-	-	-
		-	-	-	
DC current gain 1) $I_C = 150 \text{ mA}, V_{CE} = 2 \text{ V}$	h_{FE}	40	-	250	-
		-	-	-	
DC current gain 1) $I_C = 500 \text{ mA}, V_{CE} = 2 \text{ V}$	h_{FE}	25	-	-	-
		-	-	-	
Collector-emitter saturation voltage1) $I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$	V_{CEsat}	-	-	0.5	V
Base-emitter voltage 1) $I_C = 500 \text{ mA}, V_{CE} = 2 \text{ V}$	$V_{\text{BE}(\text{ON})}$	-	-	1	
		-	-	-	
AC Characteristics					
Transition frequency $I_C = 50 \text{ mA}, V_{CE} = 10 \text{ V}, f = 100 \text{ MHz}$	f_T	-	100	-	MHz


1) Pulse test: $t \leq 300 \mu\text{s}$, $D = 2\%$

Total power dissipation $P_{\text{tot}} = f(T_A^*; T_S)$

* Package mounted on epoxy

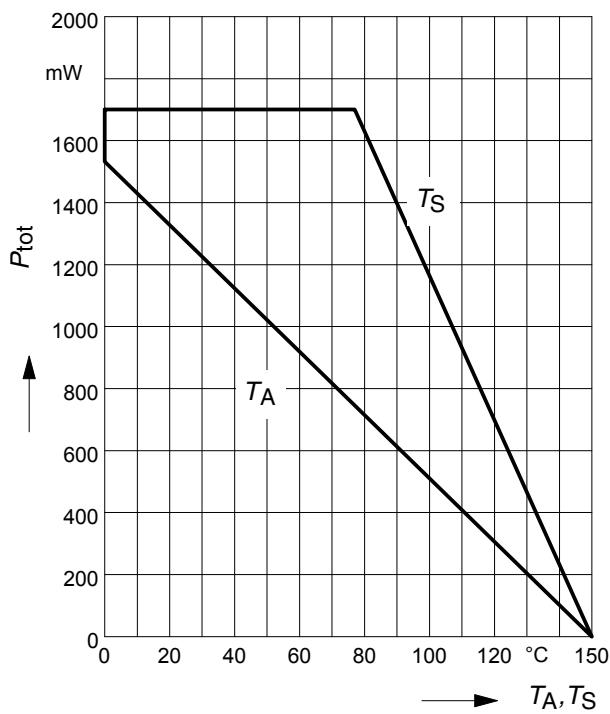


Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$

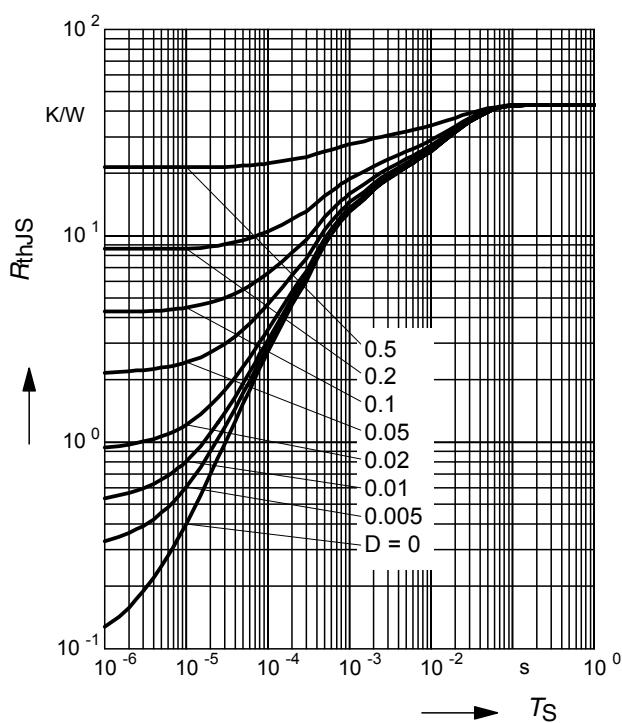


DC current gain $h_{\text{FE}} = f(I_C)$

$V_{\text{CE}} = 2\text{V}$

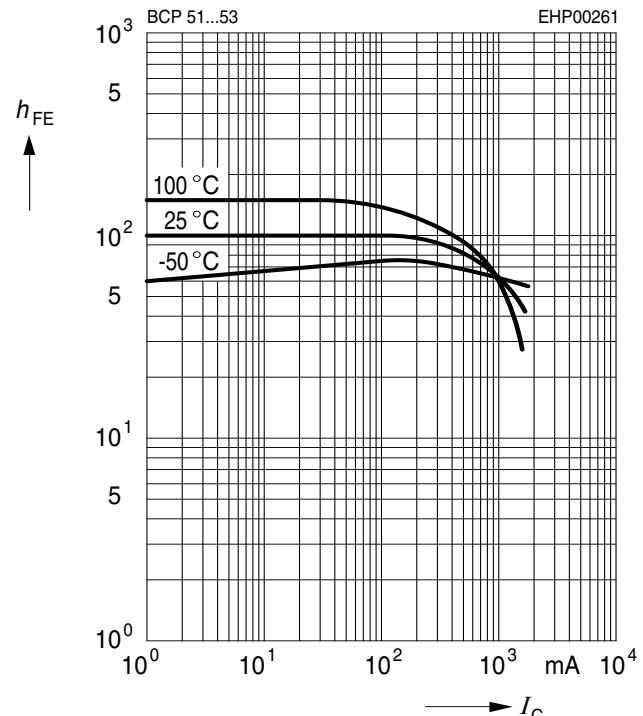


Permissible Pulse Load

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

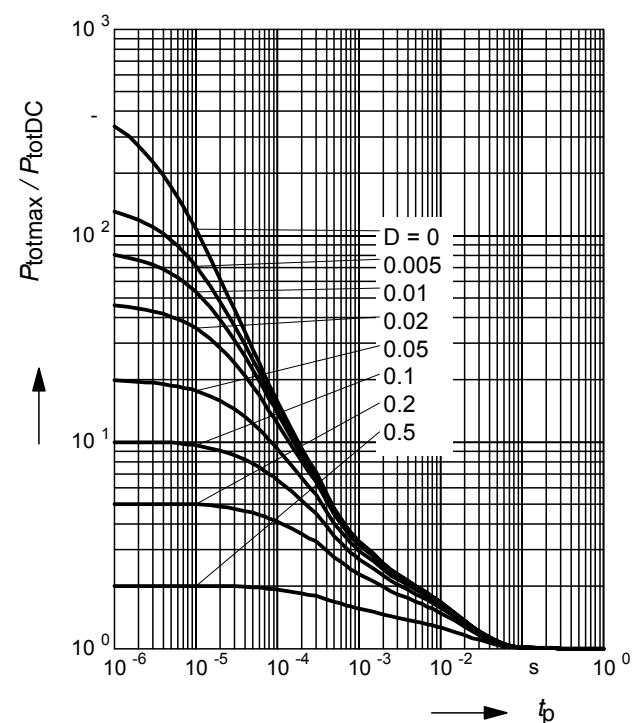


Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 30V$

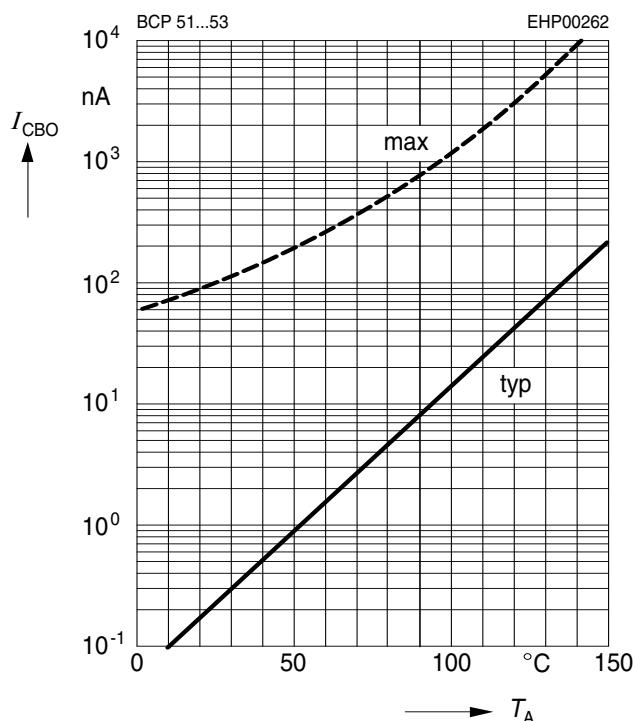


Base-emitter saturation voltage

$I_C = f(V_{BEsat})$, $h_{FE} = 10$

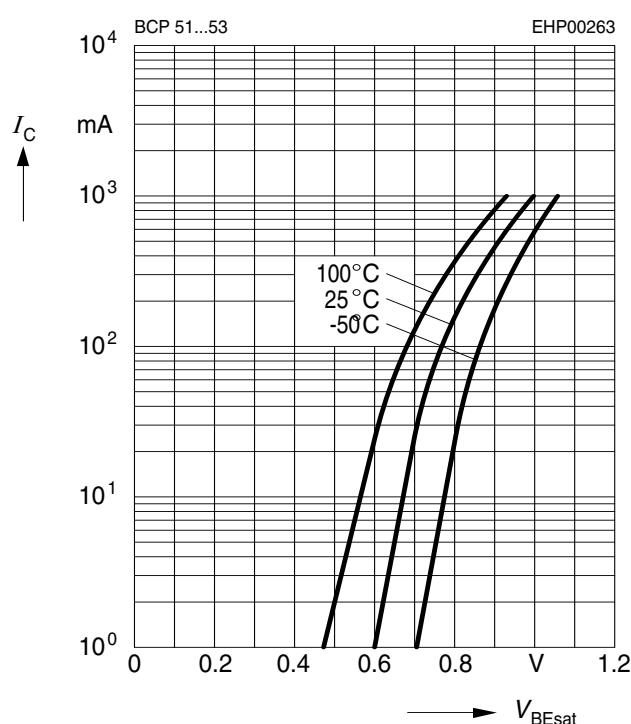

Transition frequency $f_T = f(I_C)$

$V_{CE} = 10 V$

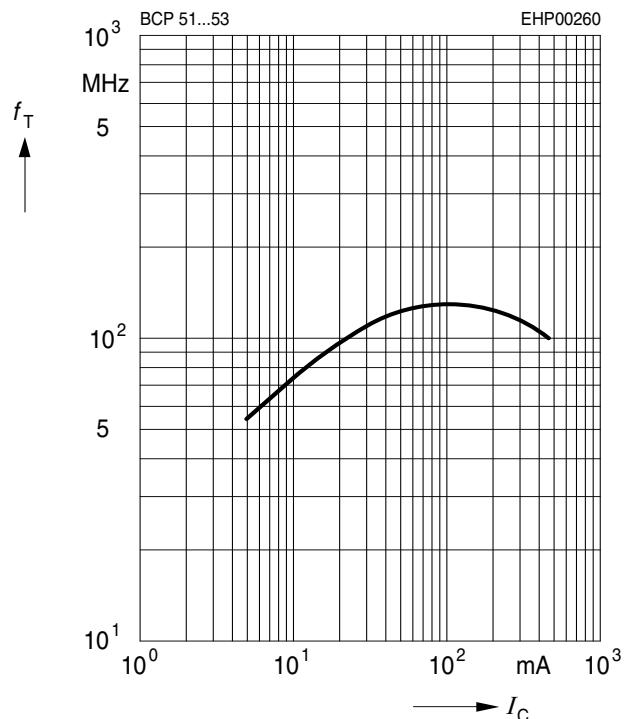

Collector-emitter saturation voltage

$I_C = f(V_{CEsat})$, $h_{FE} = 10$

