

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/10/05	

APPROVED: _____

DATE: _____ TITLE: _____

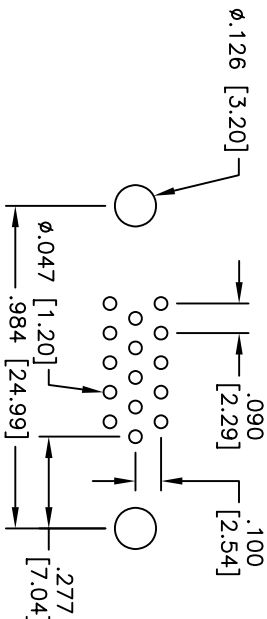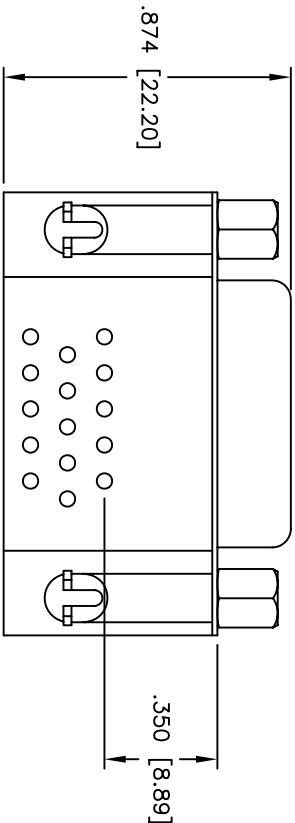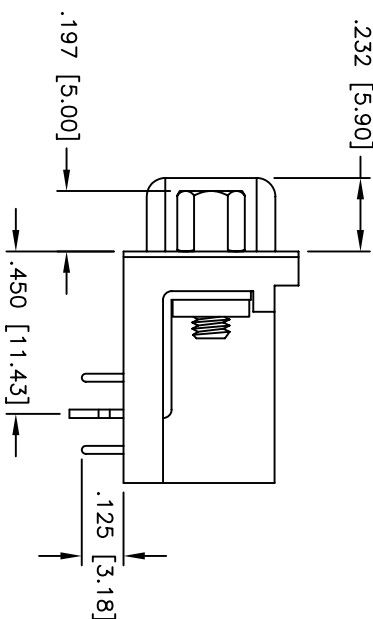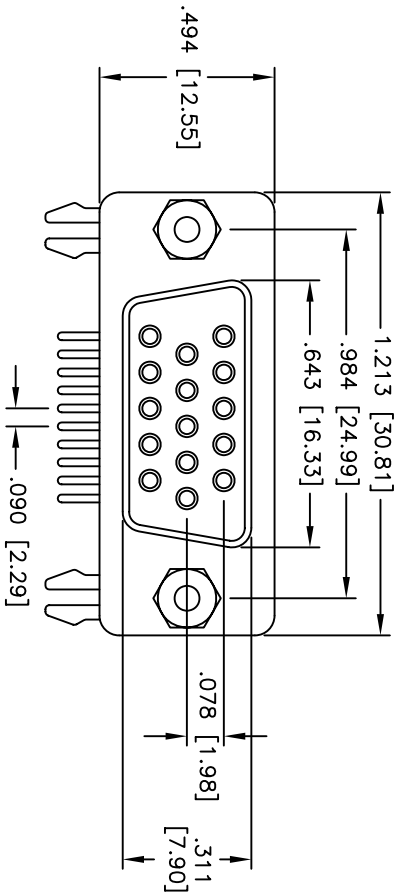

PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Tin plated

Hardware: Brass, Nickel plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

15 POS. HIGH DENSITY D-SUB SOCKET, R/A

#4-40 JACKSCREWS & BOARDLOCKS

REVISIONS

DATE

APPROVED

CHECKED

DRAWN

SS

5/10/05

SIZE

UNLESS OTHERWISE SPECIFIED			
ALL DIMENSIONS ARE INCHES [MM]			
TOLERANCES: EXCEPT AS NOTED			
INCHES			
HOLES			
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS			
DATE			
DRAWN			SS
CHECKED			
APPROVED			

3

4

5

6

A

B

C

D