




TOP VIEW




SIDE VIEW

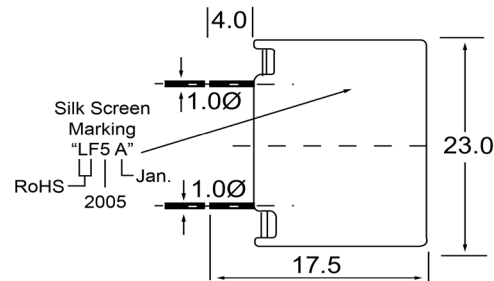

BOTTOM VIEW



Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description		Date	Approved	
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S	
Resonant Frequency	400	(Hz)							
Rated Voltage	12	(V)							
SPL @ 10cm	81	(dBA)							
Tone	Single								
Mount Type	Thru-hole								
Voltage Range	9 ~ 15	(V)							
Max Rated Current	25	(mA)							
Housing Material	ABS								
Operating Temperature	-10 ~ +60	°C							
Storage Temperature	-10 ~ +60	°C		Drawn by	Date	Checked by	Date	Approved by	Date
Weight	10	(g)		A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
			DB UNLIMITED	Electro-Mechanical Indicator			IE230412-1		