

DESCRIPTION

This product is a 40 watts AC to DC power supply intended for use in IPC systems, communication systems and embedded systems and POE systems that have a middle wattage demands. This adapter operates at 90 to 264 VAC input voltage. The unit meets EN55022, EN55024 and FCC class B emission limits, and is designed for ITE application.

APPLICATION

IPC systems, Communication systems, Embedded systems, POE systems

FEATURES

- Meet Energy Star EPS2.0/ErP lot 7
- Meet DOE Level V
- High Reliability
- EMC Standard: EN55022 CLASS B / EN55024 CLASS B
- Over Current Protection
- Over Temperature Protection
- Over Voltage Protection

WATTAGE

Wattage: 40W

PRODUCT HIGHLIGHT

V-Output: 48V
O/P Current: 0.83A
Socket Type: C14

INPUT ELECTRICAL

Input Voltage: 90 ~ 264 V
Input Frequency: 47 ~ 63 Hz

OUTPUT ELECTRICAL

Single Output: 48 V/ 0.83 A



SAFETY STANDARD APPROVAL



NO LOAD AND EFFICIENCY

No Load: 0.3 Watts
Efficiency: ≥ 85 %
DOE Level : V

PROTECTION

Protection: OVP, OCP, OTP


ENVIRONMENTAL REQUIREMENTS

TEMP. Range: Storage : -20 to + 60 °C
 Operating: 20% RH, Non-condensing
Humidity: Storage: 10% RH, Non-condensing
 2000 M
Altitude : 200,000 hours at typical load at 25°C
MTBF: ambient base on SR332

MECHANICAL

Dimension: 110mm(L) x 50mm(W) x 32mm(H)
LED Indicator: No
On/ Off Switch: No

MECHANICAL SPECIFICATION

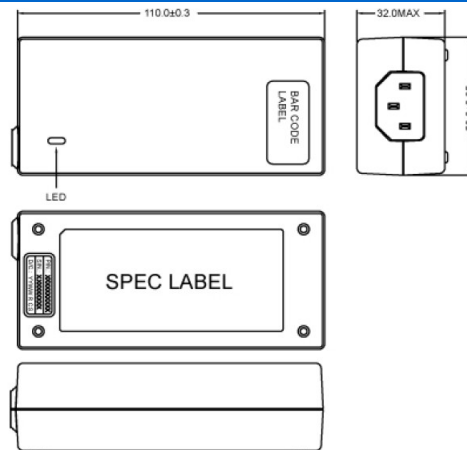

This content is subject to change, please refer to specification for more detail.
 FSP reserve the right to change the content without prior notice