




STR2-16W-130

● Features:

1. Emitted color :White
2. Lens Appearance : Water Clear
3. Indoor and outdoor application.
4. Low power consumption.
5. Wet and dust proof.


● Package dimensions

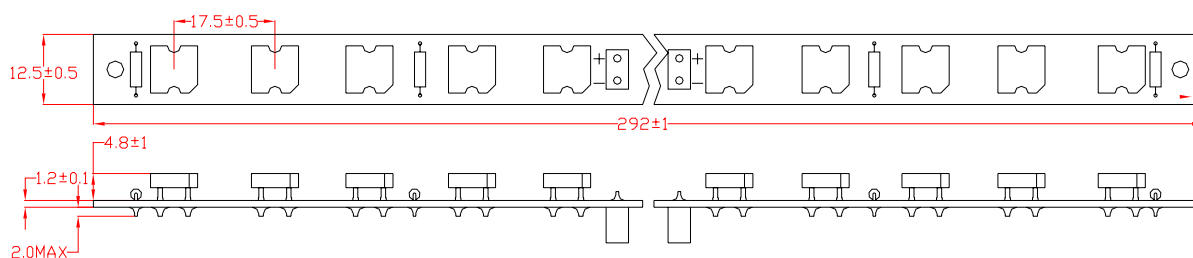

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.3 mm unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

● Circuit Diagram

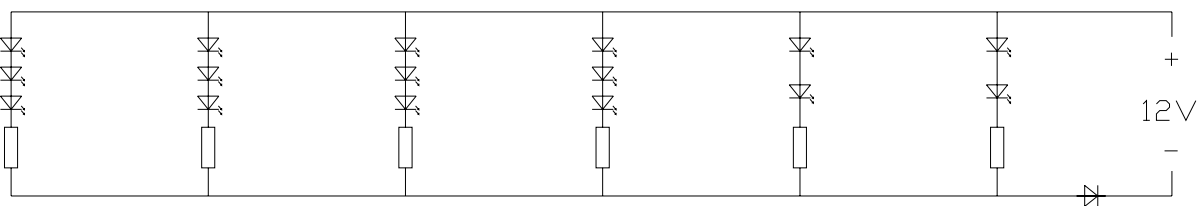

● Applications:

1. Customer design.

● Absolute maximum ratings(Ta=25℃)

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	4	W
Vcc	Vcc	13	V
Peak Forward Current* ¹	I _{FP}	600	mA
Reverse Voltage	V _R	10	V
Operating Temperature	Topr	-25℃~60℃	
Storage Temperature	Tstg	-30℃~85℃	

*¹Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width.

● Electrical and optical characteristics(Ta=25℃)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Current	I _F	Vcc=12V	240	270	300	mA
Luminous Intensity	I _v	Vcc=12V	70	-	100	lm
Reverse Current	I _R	V _R =10V	-	-	180	μA
Color Rank		Vcc=12V	X	Y	-	
			0.28~0.33	0.28~0.33		
Viewing Angle	θ _{1/2}	Vcc=12V	110	-----	130	deg