
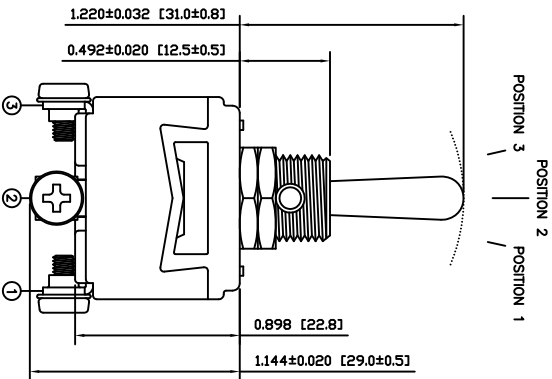





- MATERIALS**
- BODY:**
Phenolic, UL94 V-0
- ACTUATOR:**
Nickel Plated Brass
- BUSHING:**
Nickel Plated Brass
- HOUSING:**
Nickel Plated Steel
- HARDWARE:**
Nickel Plated Brass
- SPACER PLATE:**
Epoxy Board
- SPRING:**
Steel
- ACTUATOR PLUNGER:**
Phenolic, UL94 V-0
- MOBILE CONTACT BAR:**
Silver Plated Copper
- CENTER PIVOT:**
Silver Plated Copper
- CONTACTS:**
Silver Alloy Clad Copper
- TERMINALS:**
Brass
Steel
- SPECIFICATIONS**
- FUNCTION:**
1P2T (ON)-OFF-(ON)
- RATINGS:**
ANSI/UL1054 and CAN/CSA C22.2 No.55 (E194579):
20A 125VAC [cURus]
15A 277VAC [cURus]
1.5HP 125/277VAC [cURus]
- CONTACT RESISTANCE:**
Initial: 10mΩ Max.
- INSULATION RESISTANCE:**
10MΩ Min.
- DIELECTRIC STRENGTH:**
1,500VAC for 1 Minute
- OPERATING LIFE:**
6,000 Cycles [cURus]
- TEMPERATURE:**
Operating: 0°C to 85°C [cURus]
- APPROVALS:**
ROHS COMPLIANT



ACTUATOR	B	10/08/10	CAB
BODY	B	10/08/10	CAB
MATERIALS	B	10/08/09	CAB
SPECIFICATIONS	B	10/08/09	CAB
REFERENCE	REV.	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

A	B	19133	10/08/10	CAB
REV.	CORRECTED PANEL CUTOUT, SPECIFICATIONS, AND MATERIALS	POB00001	09/08/09	CAB
	INITIAL RELEASE			
	DESCRIPTION	PCB	DATE	DRAWN BY

DIMENSIONS	INCHES [MILLIMETERS]
GENERAL TOLERANCES	±0.008 [±0.2] / ±1°
SCALE	DRAWING NOT TO SCALE

TITLE	ST16DD00	DATE	JUNE 10, 2010	REVISION	B
	34-ST16DD00				



E-SWITCH



LAMB INDUSTRIES