

SM320A thru SM3100A

Schottky Barrier Rectifiers
Reverse Voltage 20 to100V Forward Current 3.0A

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Low power loss, high efficiency
- * For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- * Guardring for over voltage protection
- * High temperature soldering guaranteed: 260°C/10 seconds at terminals

Mechanical Data

Case: JEDEC DO-214AC,
molded plastic over glass body


Terminals: Plated axial leads, solderable per
MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.0026 oz., 0.075 g

Handling precaution: None

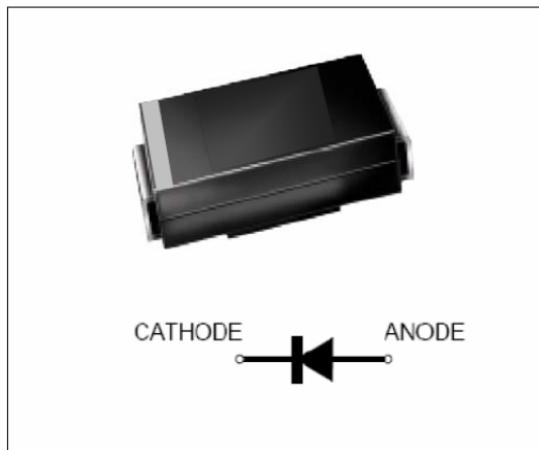

We declare that the material of product compliance with ROHS requirements

1. Electrical Characteristic

Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SM320A	SM330A	SM340A	SM350A	SM360A	SM380A	SM3100A	Unit
device marking code		S32	S33	S34	S35	S36	S38	S310	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	80	100	V
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	56	70	V
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	80	100	V
Maximum average forward rectified current at TA = 75°C	IF(AV)					3.0			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}					100			A
Typical thermal resistance (Note 1)	$R_{θJA}$				50				°C/W
Operating junction and storage temperature range	T_J , TSTG					−40 to +150			°C

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SM320A	SM330A	SM340A	SM350A	SM360A	SM380A	SM3100A	Unit
Maximum instantaneous forward voltage at 3.0A	V_F		0.50		0.70		0.85		V
Maximum DC reverse current TA = 25°C at rated DC blocking voltage TA = 100°C	IR			0.5		10.0			mA
Typical junction capacitance at 4.0V, 1MHz	CJ				110				PF

NOTES:

1. Thermal resistance from junction to ambient lead length, P.C.B. mounted

SM320A thru SM3100A

2. Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

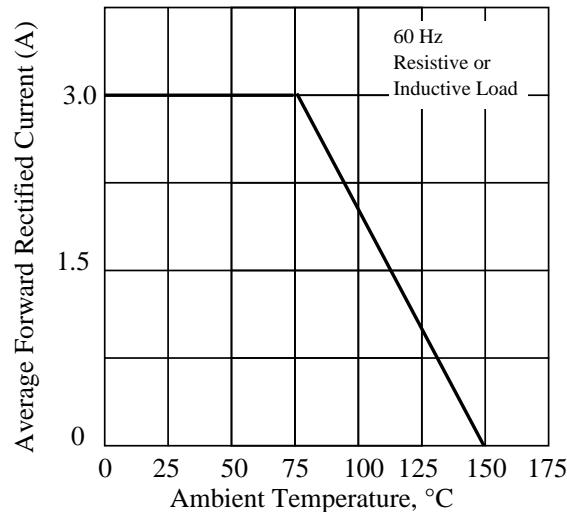


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

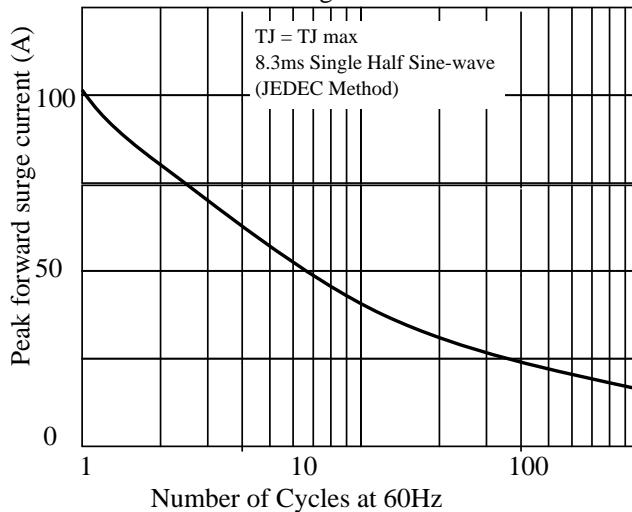


Fig. 3. - Typical Instantaneous Forward Characteristics

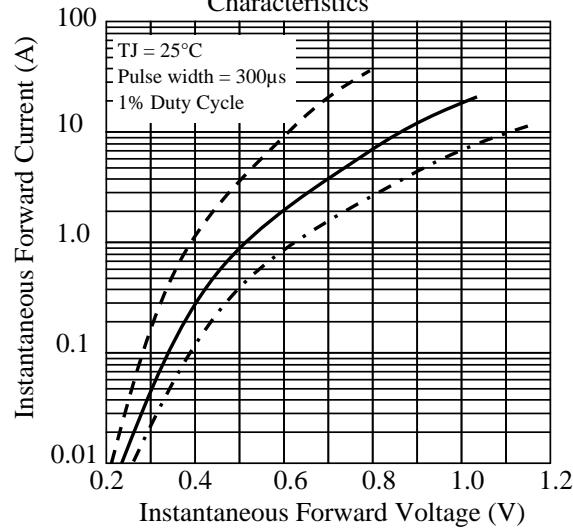


Fig. 4. - Typical Reverse Characteristics

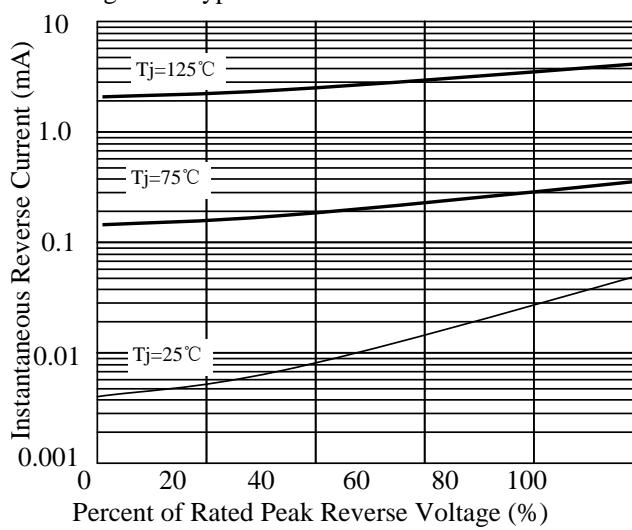


Fig 5. - typical transient thermal impedance


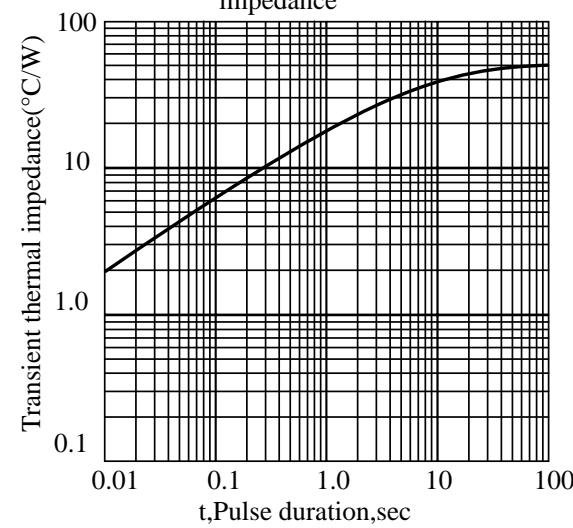


Fig 6. - Typical Junction Capacitance

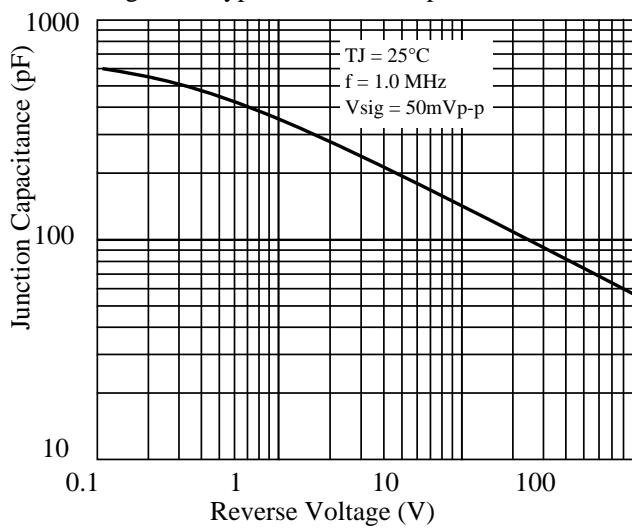

SM320A thru SM3100A**3. dimension:**

Package outline					
Dimensions					
	inches		mm		Note: DO-214AC molded plastic case The marking band indicates the cathode
A	Min.	0.086	Max.	0.110	
B	Min.	0.051	Max.	0.067	
C	Min.	0.185	Max.	0.209	
D	Min.	0.067	Max.	0.100	
E	Min.	0.035	Max.	0.059	
F	Min.	0.035	Max.	0.059	

SM320A thru SM3100A**4. Update Record**

版次	更新记录	更新作者	更新日期
1	第一版	周杰	2010-4-28
2	1. 修正VF测试条件 2. 修改结温为150度。	周杰	2010-6-8