
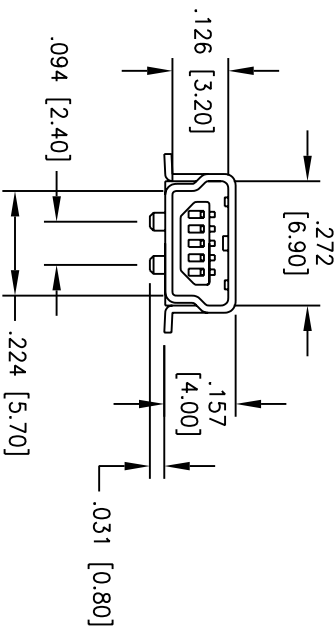
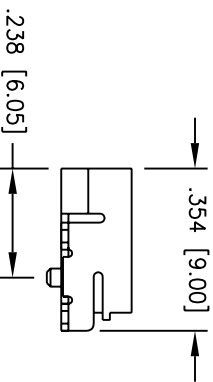
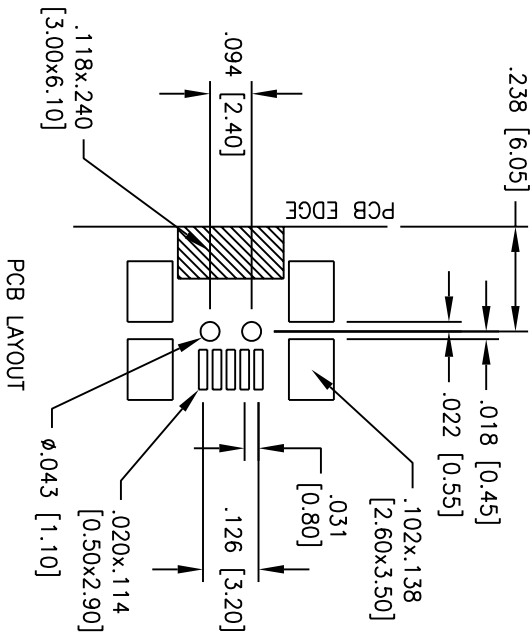


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	

APPROVED: _____

DATE: _____ TITLE: _____

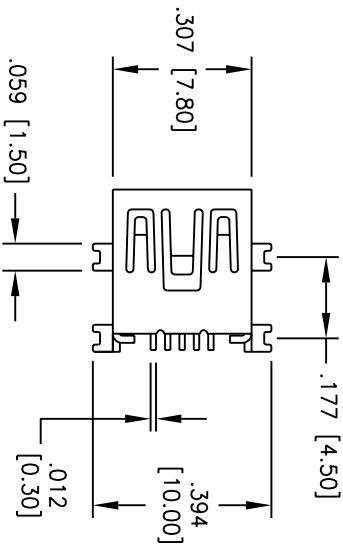

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Nylon PA6T, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Tin plated

Plating:

Cold Flash over Nickel underplate on contact area, Tin over

Copper underplate on SMT tails

Electrical:

Operating voltage: 30 VAC max.

Current rating: 1 Amp max.

Contact resistance: 50 mohms max.

Insulation resistance: 100 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

MINI USB, TYPE B, 5 PIN, SINGLE PORT
RIGHT ANGLE, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES				TITLE			
.X ± .10	ØX ± .10	ØX ± .10	ØXXX ± .015	SIZE	PART NO.	REV.	
.XXX ± .015	ØXXX ± .010	ØXXX ± .015	ØXXX ± .010	X	MUSB-B5-S-RA-SMT-2.4	-	
APPROVALS				DATE	SCALE: NTS	SHEET 1 OF 1	
DRAWN	SS	10/4/04					
CHECKED							
APPROVED							