

Wall Industries, Inc.

PSHF150W SERIES

88~132 / 170~264VAC Input Selectable by Switch
Up to 156 Watts Output Power
5, 7.5, 9, 12, 24, 27, & 36VDC Single Outputs
AC/DC Switching Power Supplies



FEATURES

- RoHS Compliant
- $\pm 10\%$ Voltage Adjustment Range
- Free Air Convection
- 88~132/170~264VAC Input Selectable by Switch
- High Reliability
- Single Outputs
- 7.83" x 4.33" x 1.97" Enclosed Case
- Up to 156W Output Power
- Short Circuit, Over Current, Over Voltage Protection
- UL60950, EN60950, GB4943, and CE Approvals

DESCRIPTION


The PSHF150W series of AC/DC power supplies offers up to 156W of output power in a 7.83" x 4.33" x 1.97" enclosed case. This series consists of 5, 7.5, 9, 12, 24, 27 and 36VDC single output models with an input voltage range of 88~132 / 170~264VAC selectable by switch. These supplies have a $\pm 10\%$ output adjustment range and are protected against short circuit, over current, and over voltage conditions. This series is RoHS compliant and has UL60950, EN60950, GB4943, and CE approvals.

SPECIFICATIONS: PSHF150W Series						
All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted. We reserve the right to change specifications based on technological advances.						
SPECIFICATION	TEST CONDITIONS		Min	Nom	Max	Unit
INPUT SPECIFICATIONS						
Input Voltage Range	Selected by switch		88~132 / 170~264VAC			
Inrush Current	At 115VAC	Cold start		20		A
	At 230VAC			40		
Input Frequency			47		63	Hz
OUTPUT SPECIFICATIONS						
Output Voltage			See Table			
Output Voltage Adjustment Range			-10		+10	%
Line Regulation	Full load		-0.5		+0.5	%
Load Regulation				0.5		%
Output Current			See Table			
Output Power			See Table			
Ripple & Noise			See Table			
Rise Time	Full load			50		ms
Hold-up Time	Full load			20		ms
PROTECTION						
Over Current Protection			110		130	%
Over Voltage Protection			115		150	%
Short Circuit Protection			Yes			
GENERAL SPECIFICATIONS						
Efficiency			See Table			
Withstand Voltage	Input to Output	All for 1 minute	3000			VAC
	Input to FG		1500			
	Output to FG		500			
Leakage Current	At 230VAC			0.7		mA
ENVIRONMENTAL SPECIFICATIONS						
Operating Temperature			-10		+50	°C
Operating Humidity	non-condensing		20		93	% RH
Storage Temperature			-20		+85	°C
Storage Humidity	non-condensing		20		95	% RH
Cooling Method			Free air convection			
PHYSICAL SPECIFICATIONS						
Weight			1.8 lbs (800g)			
Dimensions (L x W x H)			7.83 x 4.33 x 1.97 inches (199 x 110 x 50 mm)			
SAFETY & EMC CHARACTERISTICS						
Safety Standards			UL60950, EN60950, GB4943			
EMC Standards			GB9254, EN55022 Class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11			

MODEL SELECTION TABLE						
Model Number	Input Voltage Range	Output Voltage	Output Current	Ripple & Noise	Output Power	Efficiency
PSHF150W-SF-5	88~132 / 170~264 VAC (selectable by switch)	5 VDC	30.0A	120mVp-p	150W	78%
PSHF150W-SF-7.5		7.5 VDC	20.0 A	120mVp-p	150W	80%
PSHF150W-SF-9		9 VDC	16.7A	120mVp-p	150W	80%
PSHF150W-SF-12		12 VDC	12.5A	120mVp-p	150W	82%
PSHF150W-SF-24		24 VDC	6.5A	150mVp-p	156W	85%
PSHF150W-SF-27		27 VDC	5.6A	150mVp-p	151W	85%
PSHF150W-SF-36		36 VDC	4.2A	200mVp-p	151W	86%

MECHANICAL DRAWING

Unit: inches (mm)

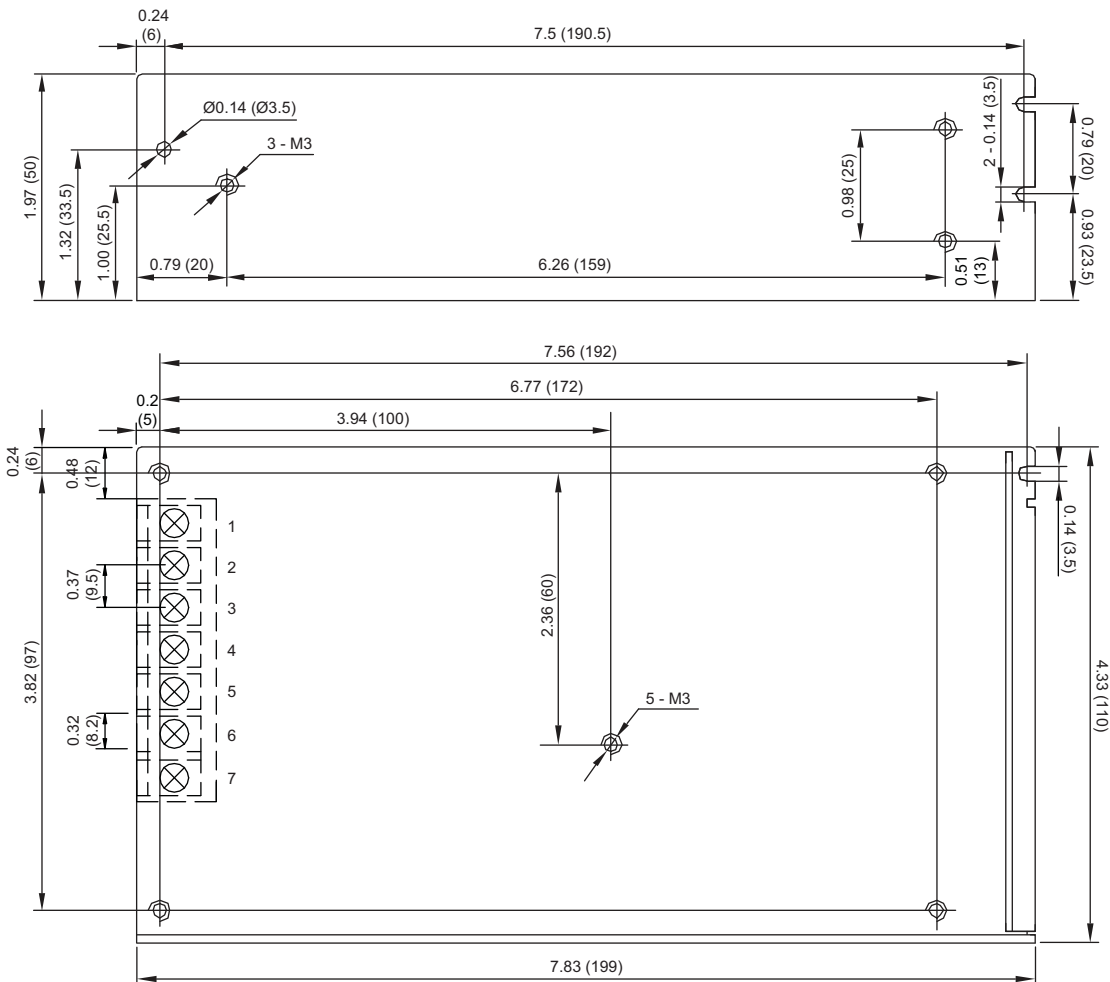

Pin	Assignment
1	AC/L
2	AC/N
3	FG
4,5	DC Output (-V)
6,7	DC Output (+V)

	Pin Distance	Pin Quantity
Input Screw Terminal	9.5mm	3
Output Screw Terminal	9.5 mm	4
Size of Screw: Ø4mm		

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

<u>Phone:</u>	☎ (603)778-2300
<u>Toll Free:</u>	☎ (888)587-9255
<u>Fax:</u>	☎ (603)778-9797
<u>E-mail:</u>	sales@wallindustries.com
<u>Web:</u>	www.wallindustries.com
<u>Address:</u>	5 Watson Brook Rd. Exeter, NH 03833