

1 AMP SCHOTTKY BARRIER RECTIFIERS

FEATURES

- Metal semiconductor junction with guard ring
- Epitaxial Construction
- Low forward voltage drop
- High current capacity
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- **RoHS COMPLIANT**

MECHANICAL DATA


- Case: JEDEC DO-41, molded epoxy (U/L Flammability Rating 94V-0)
- Terminals: Plated axial leads
- Soldering: Per MIL-STD 202 Method 208 guaranteed
- Polarity: Color band denotes cathode
- Mounting Position: Any
- Weight: 0.012 Ounces (0.34 Grams)

MECHANICAL SPECIFICATION

ACTUAL SIZE OF
DO-41 PACKAGE

SERIES 1N5817 - 1N5819

DO - 41

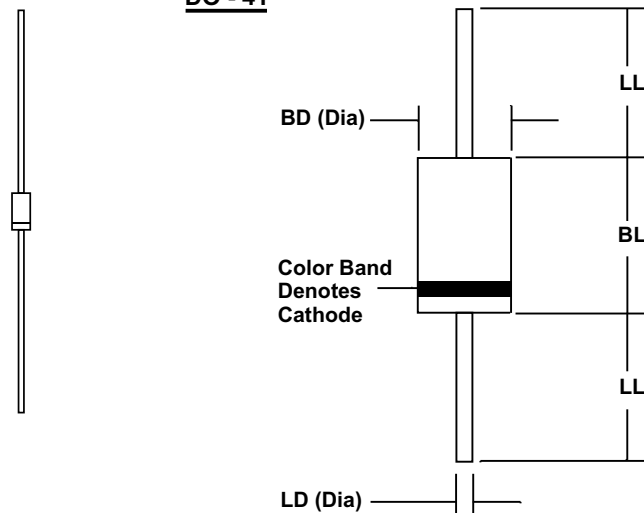

Sym	Minimum		Maximum	
	In	mm	In	mm
BL	0.160	4.1	0.205	5.2
BD	0.103	2.6	0.107	2.7
LL	1.00	25.4		
LD	0.028	0.71	0.034	0.86


MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive loads, derate current by 20%.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS			UNITS
Series Number		1N5817	1N5818	1N5819	
Maximum DC Blocking Voltage	V _{RM}	20	30	40	VOLTS
Maximum RMS Voltage	V _{RMS}	14	21	28	
Maximum Peak Recurrent Reverse Voltage	V _{RRM}	20	30	40	
Average Forward Rectified Current @ T _L = 90 °C (T _L measured on cathode lead, 1/32 in. from case)	I _O	1			AMPS
Peak Forward Surge Current (8.3 mSec single half sine wave superimposed on rated load)	I _{FSM}	25			
Maximum Forward Voltage at 1 Amp DC	V _{FM}	0.45	0.55	0.6	VOLTS
Maximum Forward Voltage at 3 Amps DC	V _{FM}	0.75	0.875	0.9	
Maximum Average DC Reverse Current @ T _L = 25°C At Rated DC Blocking Voltage (Note 1) @ T _L = 100°C	I _{RM}	1 10			mA
Typical Thermal Resistance, Junction to Ambient	R _{θJA}	80			°C/W
Typical Junction Capacitance (Note 2)	C _J	110			pF
Junction Operating Temperature Range	T _J	-65 to +125			°C
Storage Temperature Range	T _{STG}	-65 to +150			

NOTES: (1) Lead temperature reference is cathode lead 1/32 in from case.
(2) Measured at 1MHz & applied reverse voltage of 4 volts

437158171



1 AMP SCHOTTKY BARRIER RECTIFIERS

RATING & CHARACTERISTIC CURVES FOR SERIES 1N5817 - 1N5819

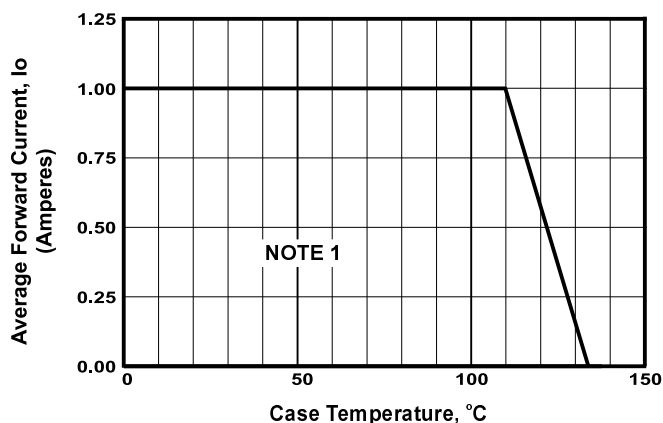


FIGURE 1. FORWARD CURRENT DERATING CURVE

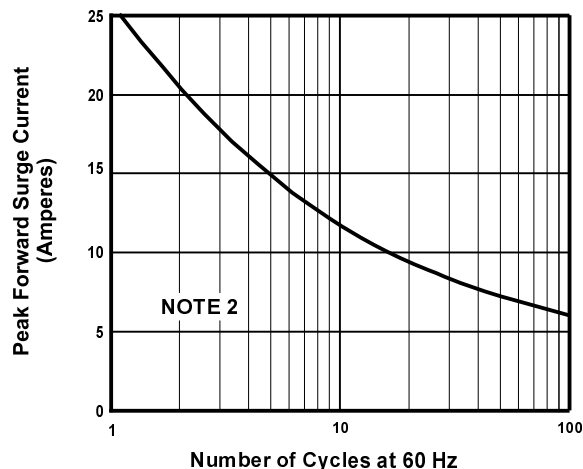


FIGURE 2. MAXIMUM NON-REPETITIVE SURGE CURRENT

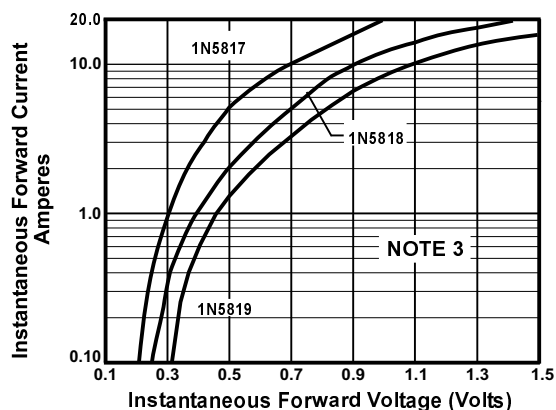


FIGURE 3. TYPICAL FORWARD CHARACTERISTICS

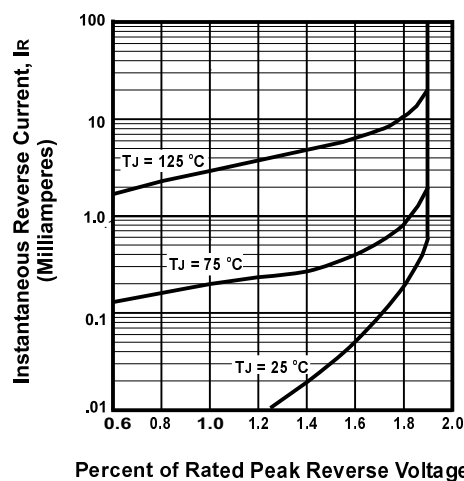


FIGURE 4. TYPICAL REVERSE CHARACTERISTICS

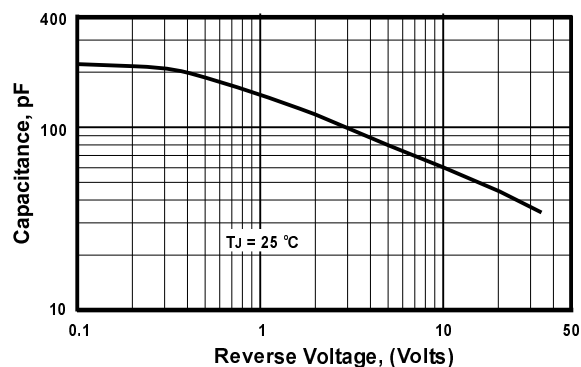


FIGURE 5. TYPICAL JUNCTION CAPACITANCE

NOTES

- (1) Single Phase, Half Wave, 60 Hz, Resistive or Inductive Load, 0.375" (9mm) Lead Length
- (2) JEDEC Method, 8.3 mSec. Single Half Sine Wave
- (3) T_J = 25 °C, Pulse Width = 300 μSec, 1.0% Duty Cycle