



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## Product Specifications Approval Sheet

Product Description: SAW Resonator 600 MHz SMD 3.0X3.0 mm

TST Part No.: TC0527A

Customer Part No.: \_\_\_\_\_

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: Justin Wu *Justin Wu*

Approved by: Francis Chen *[Signature]*

Date: 2012/05/10

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## SAW Resonator 600MHz

MODEL NO.: TC0527A

REV. NO.:1

### A. FEATURES:

- 1. 1-Port Resonator.

### B. MAXIMUM RATING:

- 1. Input Power Level: 10 dBm
- 2. DC voltage: 3 V
- 3. Operating Temperature: -40°C to +85°C
- 4. Storage Temperature: -40°C to +85°C

Electrostatic Sensitive Device

RoHS Compliant  
Lead free  
Lead-free soldering

### C. ELECTRICAL CHARACTERISTICS:


Reference Temperature  $T_A=25^\circ\text{C}$

Characteristic	Units	Minimum	Typical	Maximum
Center frequency <b>F<sub>c</sub></b>	<b>MHz</b>	599.965	600	600.035
Insertion Loss <b>IL</b>	<b>dB</b>	-	1.15	2.0
Equivalent Element				
Unload quality factor <b>Q<sub>U</sub></b>		-	6788	-
Motional capacitance <b>C1</b>	<b>fF</b>	-	2.72	-
Motional inductance <b>L1</b>	<b>μH</b>	-	26.79	-
Motional resistance <b>R1</b>	<b>Ohm</b>	-	14.87	-
Parallel capacitance <b>C<sub>0</sub></b>	<b>pF</b>	-	3.88	-
Frequency Temperature coefficient (TC <sub>f</sub> )	<b>ppm/c*2</b>	-	0.032	-
Package size		SMD 3.0X3.0X1.4 mm		


Temperature dependence of fc:  $f_c(T_A)=f_c(T_0)(1-TC_f(T_A-T_0)^2)$

### D. EQUIVIRENT CIRCUIT:

One-Port Resonator:

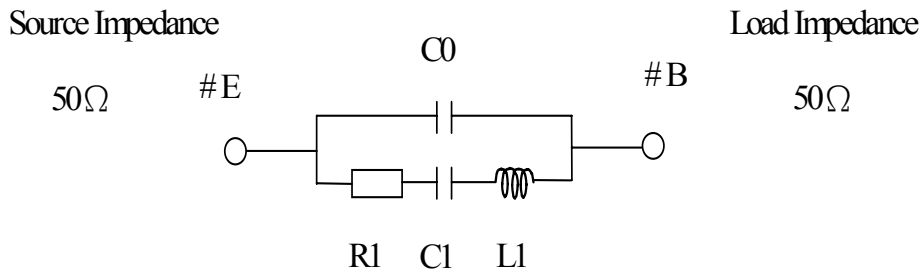

**E. OUTLINE DRAWING:**

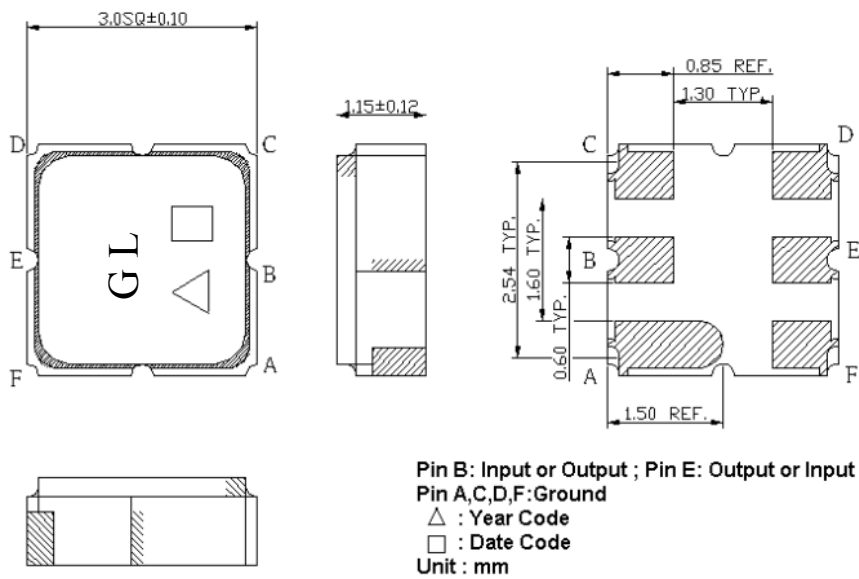


□ Data code : See the table

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z


△ Year code : See the table

<b>Year</b>	2012	2013	2014	2015	...	2019	2020
<b>Code</b>	2	3	4	5	...	9	0


**F. FREQUENCY CHARACTERISTICS:**

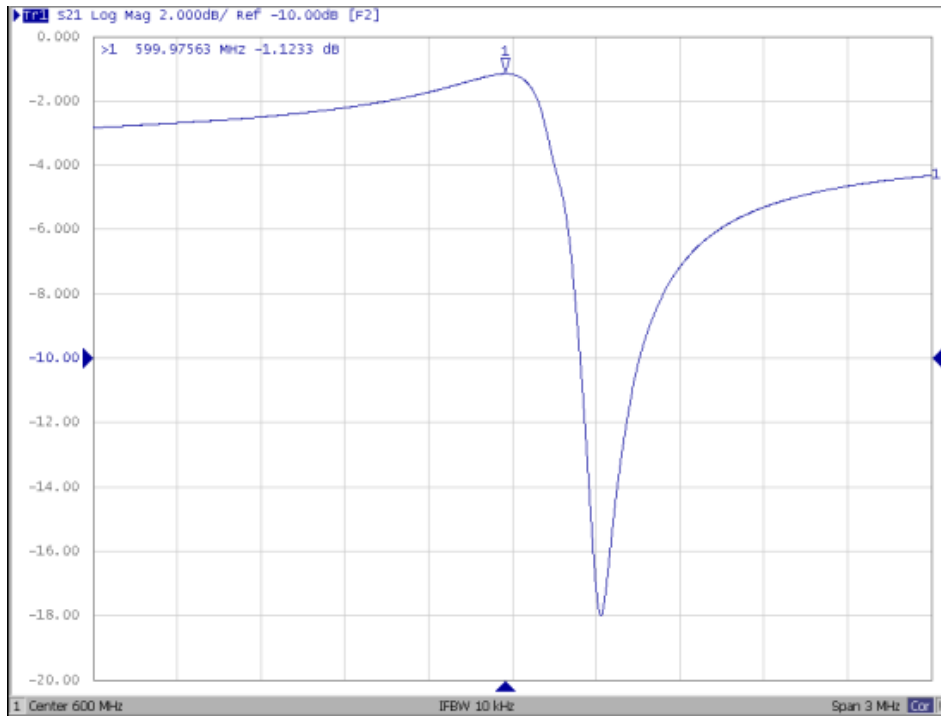

**G. TEST CIRCUIT:**


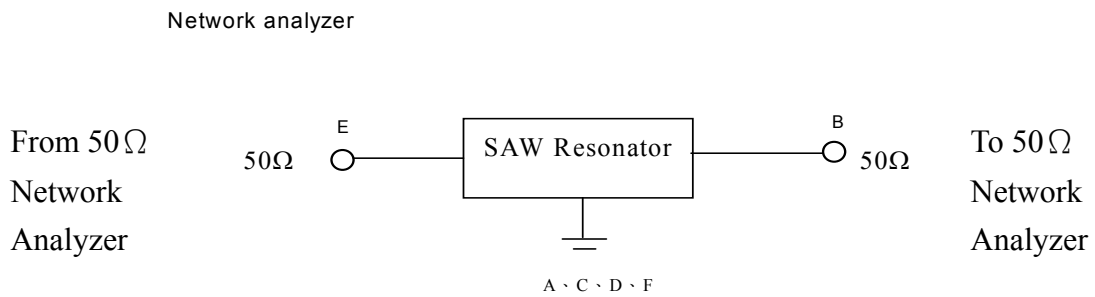


**H. PCB FOOTPRINT:**

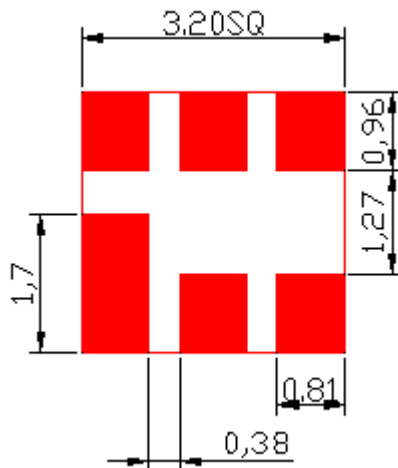


G. PACKING:

1. REEL DIMENSION

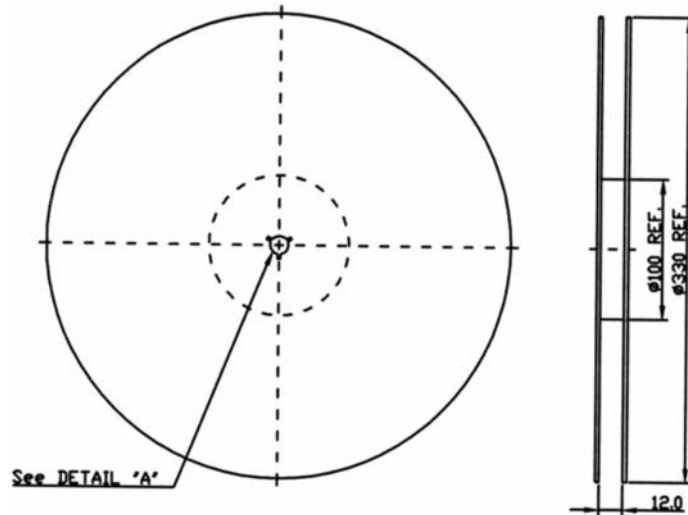

2. TAPE DIMENSION

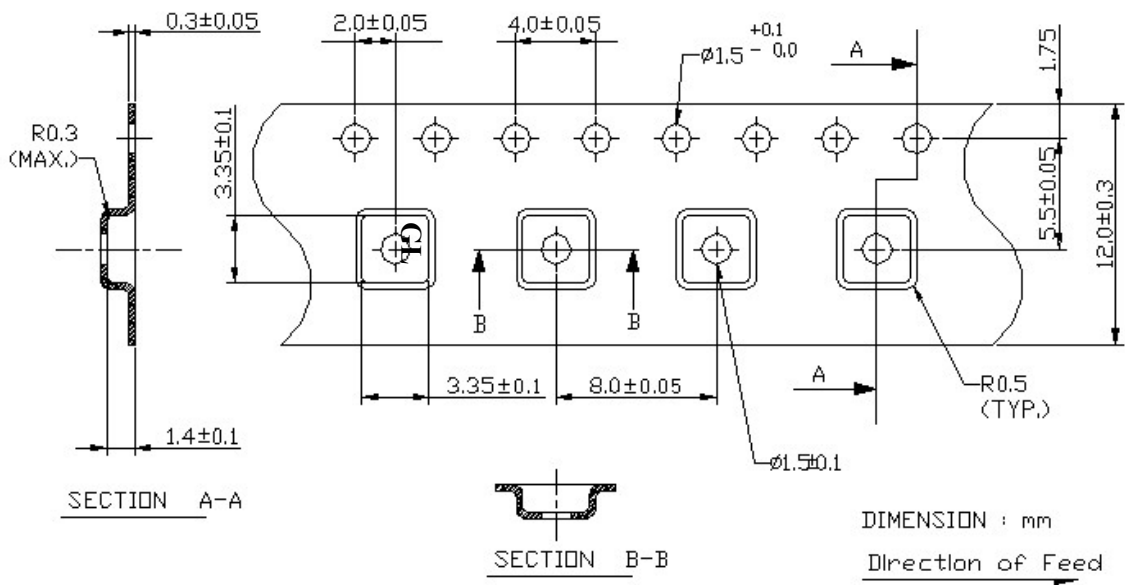

J. RECOMMENDED REFLOW PROFILE:

