


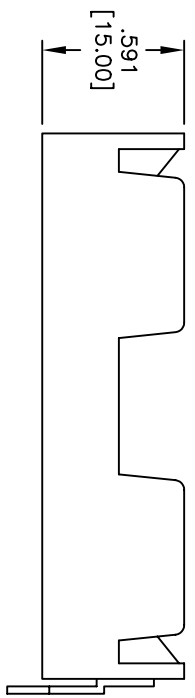


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/17/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

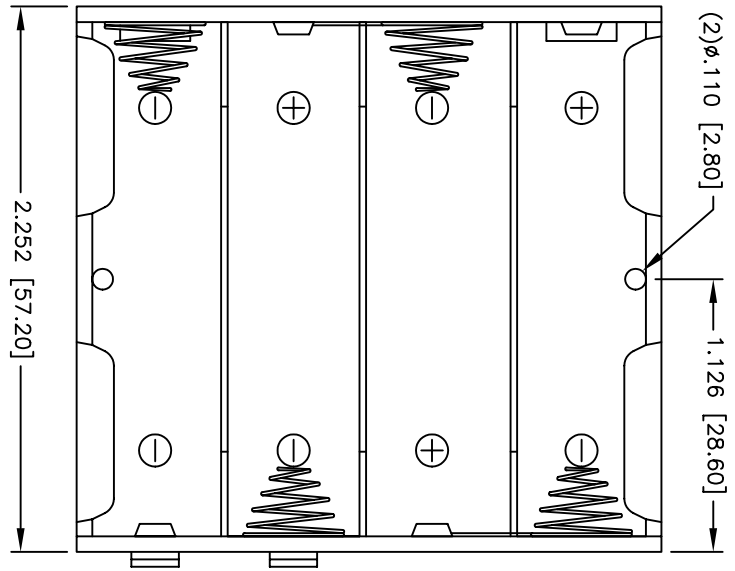

PCB LAYOUT

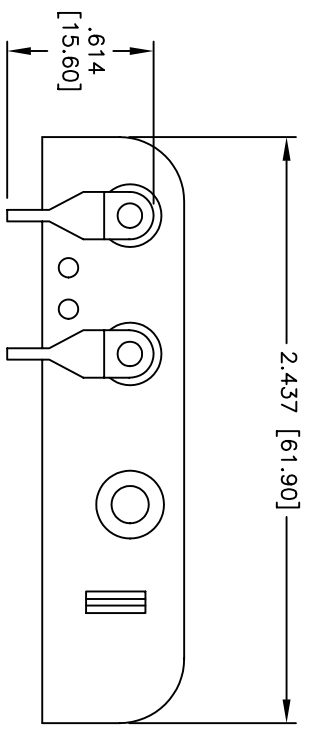

**SPECIFICATIONS:**

Material: Insulator: Impact resistant Polypropylene, rated UL94-HB  
 Insulator color: Black  
 Spring: Steel, Nickel plated  
 Contacts: Steel, Nickel plated  
 Electrical:  
 Operating voltage: 1.5 VDC max.  
 Temperature Rating:  
 Operating temperature: -10°C to +80°C  
 Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 230°C for 5 seconds



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES  
 .X ±.10 ØXX ±.10  
 .XX ±.020 ØXXX ±.015  
 .XXX ±.015 ØXXXX ±.010  
 APPROVALS: DATE

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**BATTERY HOLDER, PCB TERMINALS  
 FOR FOUR "AA" CELLS**

DRAWN	SS	1/17/05
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	BH-06-1	-
REF:	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1