

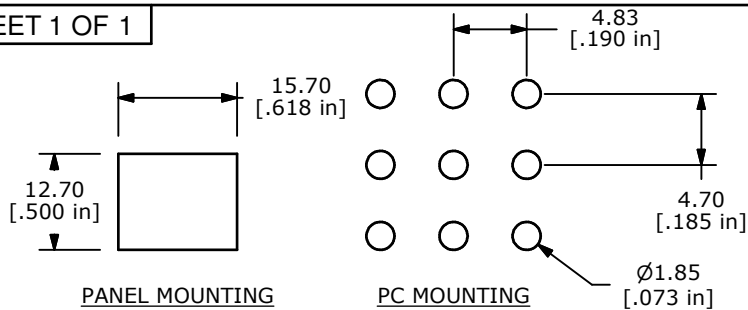


ISOMETRIC

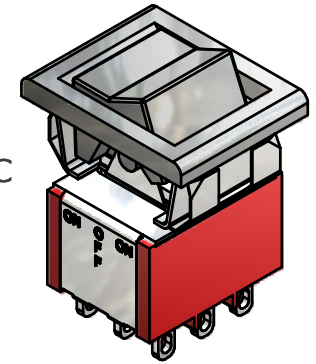


| SWITCH FUNCTION |        |             |
|-----------------|--------|-------------|
| POS. 1          | POS. 2 | POS. 3      |
|                 |        |             |
| ON              | NONE   | ON          |
| 2-3,5-6,8-9     | N/A    | 2-1,5-4,8-7 |

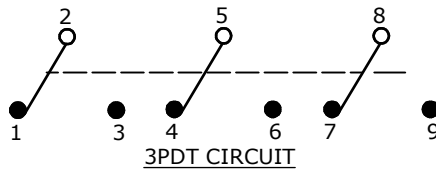

## NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: GOLD
- ▲ 5. RATING: 5A @120 VAC or 28VDC  
2A @250 VAC
- ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 Mega-OHM MIN.
- CONTACT RESISTANCE: 100 Milli-OHM Max.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- 2002/95/EC (ROHS) COMPLIANT
- ▲ DENOTES CRITICAL PARAMETER.

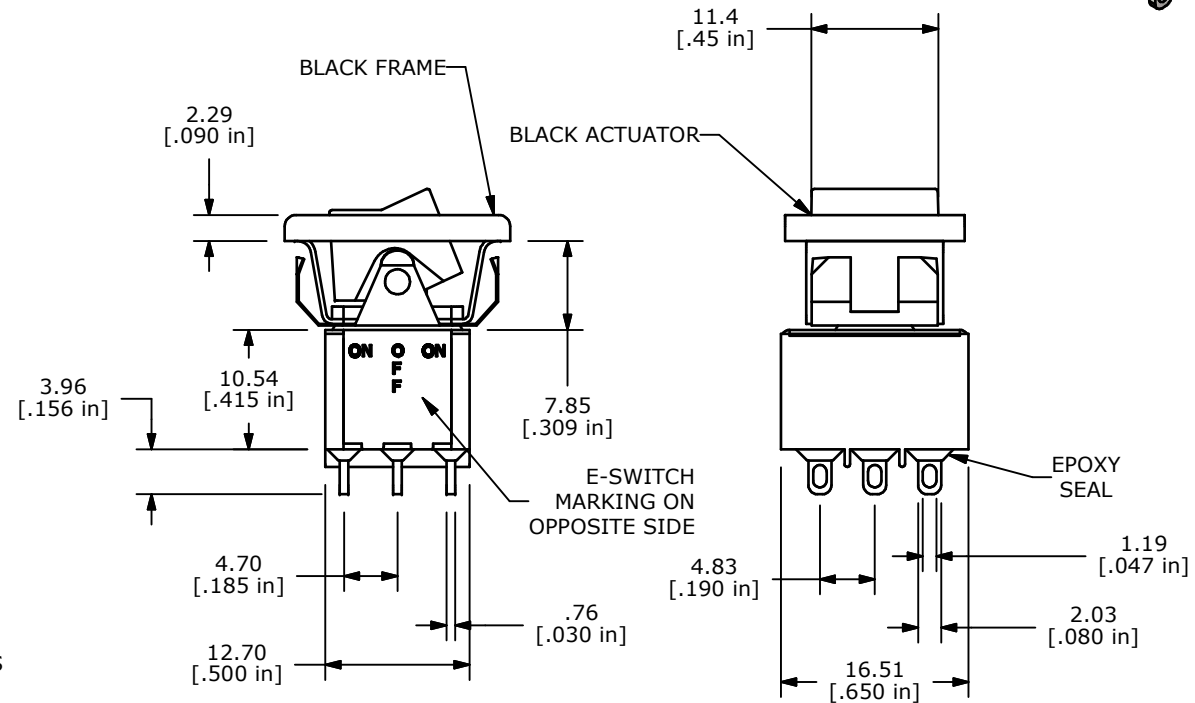

E-SWITCH®



TITLE 3003P3R6BLKM1QEBLK

|     |        |                         |          |     |
|-----|--------|-------------------------|----------|-----|
| A   | 19334  | RELEASED FOR PRODUCTION | 10/19/10 | BLR |
| REV | PCR NO | DESCRIPTION             | DATE     | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1

DATE 10/26/2005

DR BLR

DWG T331032

REV A