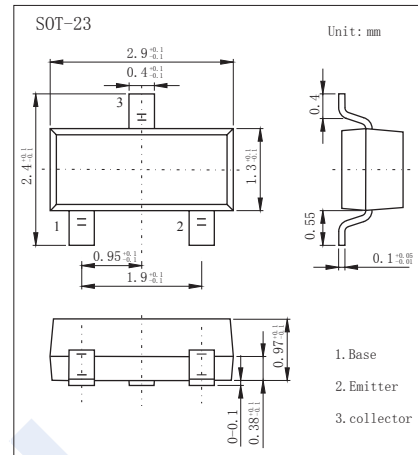


PNP Transistors

2SA1468-HF

■ Features

- High voltage amplifier
- Pb-Free Package May be Available. The G-Suffix Denotes a Pb-Free Lead Finish

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CB0}	-180	V
Collector - Emitter Voltage	V_{CE0}	-180	
Emitter - Base Voltage	V_{EB0}	-5	
Collector Current - Continuous	I_C	-100	mA
Collector Power Dissipation	P_C	150	mW
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature range	T_{stg}	-55 to 150	

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V_{CB0}	$I_C = -100\ \mu\text{A}$, $I_E = 0$	-180			V
Collector- emitter breakdown voltage	V_{CE0}	$I_C = -0.5\ \text{mA}$, $R_{BE} = \infty$	-180			
Emitter - base breakdown voltage	V_{EB0}	$I_E = -100\ \mu\text{A}$, $I_C = 0$	-5			
Collector-base cut-off current	I_{CBO}	$V_{CB} = -180\ \text{V}$, $I_E = 0$			-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5\ \text{V}$, $I_C = 0$			-0.1	
Collector-emitter saturation voltage (Note.1)	$V_{CE(sat)}$	$I_C = -30\ \text{mA}$, $I_B = -3\ \text{mA}$			-0.5	V
Base - emitter saturation voltage (Note.1)	$V_{BE(sat)}$	$I_C = -30\ \text{mA}$, $I_B = -3\ \text{mA}$			-1.2	
Base - emitter voltage	V_{BE}	$V_{CE} = -12\ \text{V}$, $I_C = -2\ \text{mA}$			-1	
DC current gain (Note1 and 2)	h_{FE}	$V_{CE} = -12\ \text{V}$, $I_C = -2\ \text{mA}$	100		320	
Collector output capacitance	C_{ob}	$V_{CB} = -10\ \text{V}$, $I_E = 0$, $f = 1\ \text{MHz}$		3.5		pF
Transition frequency	f_T	$V_{CE} = -12\ \text{V}$, $I_C = -10\ \text{mA}$		200		MHz

Note.1: Pulse test

Note.2: The 2SA1468-HF is grouped by h_{FE} as follows.







■ Classification of h_{FE}

Type	2SA1468-B-HF	2SA1468-C-HF
Range	100-200	160-320
Marking	INB _F	INC _F

PNP Transistors

2SA1468-HF

■ Typical Characteristics

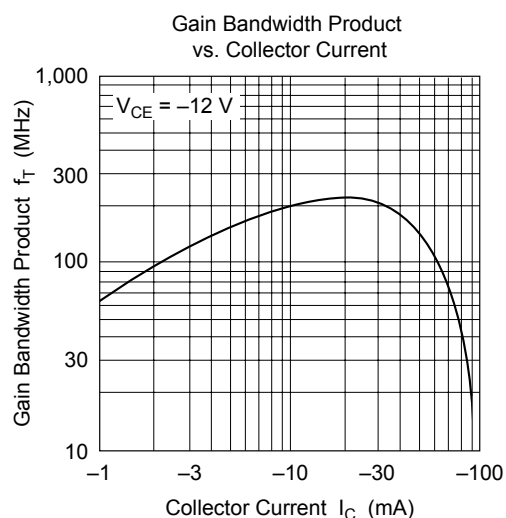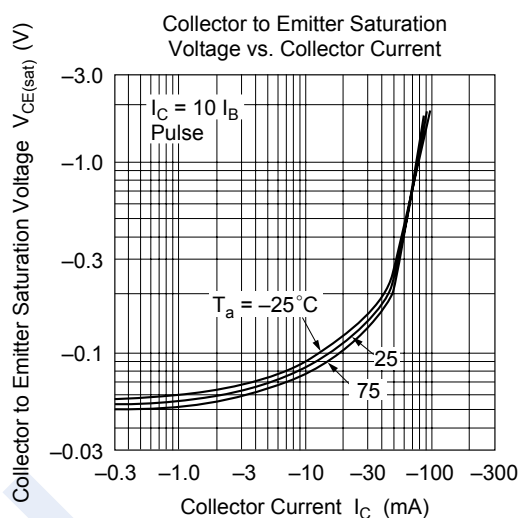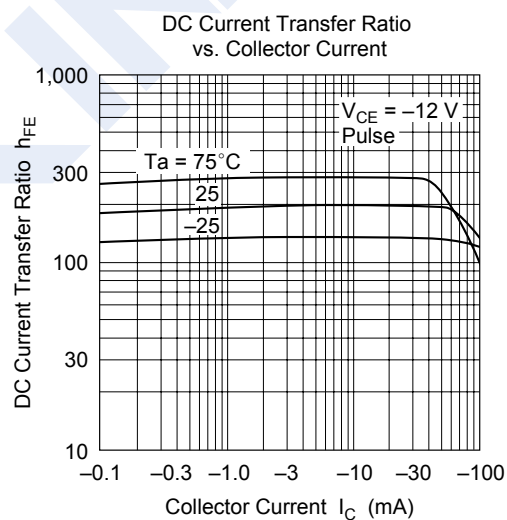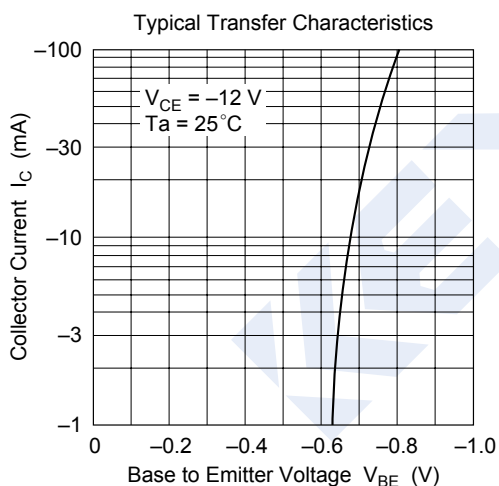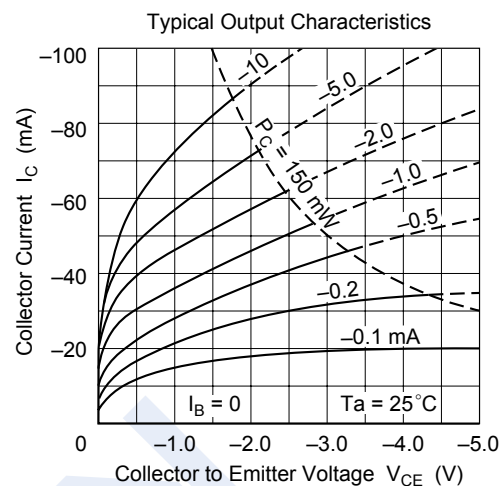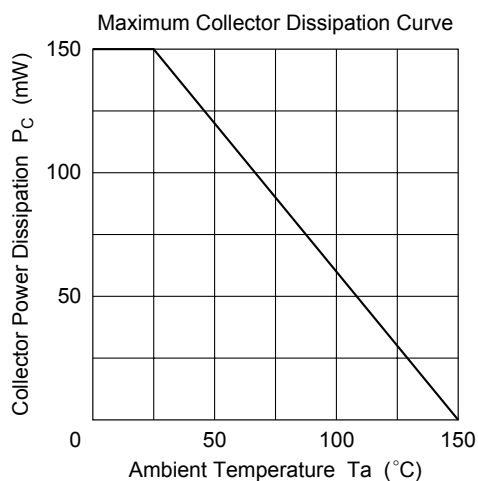

PNP Transistors

2SA1468-HF

■ Typical Characteristics

