

Shielded Drum Surface Mount Inductors

Model HM79S

Features and Benefits

- Operating Temperature Range -40°C to +125°C
- Operating Frequency Up to 3MHz
- RoHS Compliant



Specifications @ 25°C

| Part Number | Inductance | | | I _{rated} ⁽¹⁾ (A dc) | DCR (Ω) Max. | Part Number | Inductance | | | I _{rated} ⁽¹⁾ (A dc) | DCR (Ω) Max. |
|----------------|------------|-------------|------------------------|---|--------------------|----------------|------------|-------------|------------------------|---|--------------------|
| | Lo (μH) | Tol. (%) | Test Freq. (kHz) | | | | Lo (μH) | Tol. (%) | Test Freq. (kHz) | | |
| HM79S-63100LF | 10 | ±20% | 100 | 1.00 | 0.14 | HM79S-105680LF | 68 | ±15% | 100 | 0.85 | 0.21 |
| HM79S-63120LF | 12 | ±20% | 100 | 0.94 | 0.16 | HM79S-105820LF | 82 | ±15% | 100 | 0.79 | 0.28 |
| HM79S-63150LF | 15 | ±20% | 100 | 0.86 | 0.18 | HM79S-105101LF | 100 | ±10% | 1 | 0.72 | 0.34 |
| HM79S-63180LF | 18 | ±20% | 100 | 0.78 | 0.25 | HM79S-105121LF | 120 | ±10% | 1 | 0.63 | 0.37 |
| HM79S-63220LF | 22 | ±20% | 100 | 0.76 | 0.32 | HM79S-105151LF | 150 | ±10% | 1 | 0.55 | 0.51 |
| HM79S-63270LF | 27 | ±20% | 100 | 0.64 | 0.36 | HM79S-105181LF | 180 | ±10% | 1 | 0.50 | 0.57 |
| HM79S-63330LF | 33 | ±15% | 100 | 0.61 | 0.41 | HM79S-105221LF | 220 | ±10% | 1 | 0.47 | 0.78 |
| HM79S-63390LF | 39 | ±15% | 100 | 0.53 | 0.47 | HM79S-105271LF | 270 | ±10% | 1 | 0.41 | 0.87 |
| HM79S-63470LF | 47 | ±15% | 100 | 0.50 | 0.51 | HM79S-105331LF | 330 | ±10% | 1 | 0.37 | 1.20 |
| HM79S-63560LF | 56 | ±15% | 100 | 0.46 | 0.71 | HM79S-105391LF | 390 | ±10% | 1 | 0.35 | 1.34 |
| HM79S-63680LF | 68 | ±15% | 100 | 0.42 | 0.82 | HM79S-105471LF | 470 | ±10% | 1 | 0.33 | 1.50 |
| HM79S-74100LF | 10 | ±20% | 100 | 1.65 | 0.07 | HM79S-105681LF | 680 | ±10% | 1 | 0.28 | 2.25 |
| HM79S-74120LF | 12 | ±20% | 100 | 1.57 | 0.07 | HM79S-125100LF | 10 | ±20% | 100 | 2.65 | 0.05 |
| HM79S-74150LF | 15 | ±20% | 100 | 1.39 | 0.08 | HM79S-125120LF | 12 | ±20% | 100 | 2.50 | 0.05 |
| HM79S-74180LF | 18 | ±20% | 100 | 1.29 | 0.1 | HM79S-125150LF | 15 | ±20% | 100 | 2.45 | 0.06 |
| HM79S-74220LF | 22 | ±20% | 100 | 1.12 | 0.13 | HM79S-125180LF | 18 | ±20% | 100 | 2.40 | 0.06 |
| HM79S-74270LF | 27 | ±20% | 100 | 1.06 | 0.16 | HM79S-125220LF | 22 | ±20% | 100 | 2.20 | 0.07 |
| HM79S-74330LF | 33 | ±15% | 100 | 0.97 | 0.18 | HM79S-125270LF | 27 | ±20% | 100 | 2.00 | 0.08 |
| HM79S-74390LF | 39 | ±15% | 100 | 0.91 | 0.18 | HM79S-125330LF | 33 | ±20% | 100 | 1.80 | 0.10 |
| HM79S-74470LF | 47 | ±15% | 100 | 0.80 | 0.27 | HM79S-125390LF | 39 | ±20% | 100 | 1.65 | 0.11 |
| HM79S-74560LF | 56 | ±15% | 100 | 0.76 | 0.29 | HM79S-125470LF | 47 | ±20% | 100 | 1.50 | 0.12 |
| HM79S-74680LF | 68 | ±15% | 100 | 0.68 | 0.33 | HM79S-125560LF | 56 | ±20% | 100 | 1.38 | 0.15 |
| HM79S-74820LF | 82 | ±15% | 100 | 0.62 | 0.43 | HM79S-125680LF | 68 | ±20% | 100 | 1.26 | 0.17 |
| HM79S-74101LF | 100 | ±10% | 1 | 0.55 | 0.49 | HM79S-125820LF | 82 | ±20% | 100 | 1.14 | 0.20 |
| HM79S-74121LF | 120 | ±10% | 1 | 0.49 | 0.68 | HM79S-125101LF | 100 | ±20% | 1 | 1.05 | 0.25 |
| HM79S-74151LF | 150 | ±10% | 1 | 0.44 | 0.94 | HM79S-125121LF | 120 | ±20% | 1 | 0.95 | 0.28 |
| HM79S-74181LF | 180 | ±10% | 1 | 0.40 | 1.00 | HM79S-125151LF | 150 | ±20% | 1 | 0.85 | 0.40 |
| HM79S-74221LF | 220 | ±10% | 1 | 0.36 | 1.18 | HM79S-125181LF | 180 | ±20% | 1 | 0.77 | 0.48 |
| HM79S-74271LF | 270 | ±10% | 1 | 0.33 | 1.30 | HM79S-125221LF | 220 | ±20% | 1 | 0.70 | 0.52 |
| HM79S-105100LF | 10 | ±20% | 100 | 2.06 | 0.06 | HM79S-125271LF | 270 | ±20% | 1 | 0.63 | 0.70 |
| HM79S-105120LF | 12 | ±20% | 100 | 1.94 | 0.07 | HM79S-125331LF | 330 | ±20% | 1 | 0.57 | 0.80 |
| HM79S-105150LF | 15 | ±20% | 100 | 1.72 | 0.07 | HM79S-125391LF | 390 | ±20% | 1 | 0.52 | 1.08 |
| HM79S-105180LF | 18 | ±20% | 100 | 1.58 | 0.08 | HM79S-125471LF | 470 | ±20% | 1 | 0.48 | 1.20 |
| HM79S-105220LF | 22 | ±20% | 100 | 1.42 | 0.08 | HM79S-125561LF | 560 | ±20% | 1 | 0.44 | 1.34 |
| HM79S-105270LF | 27 | ±20% | 100 | 1.32 | 0.10 | HM79S-125681LF | 680 | ±20% | 1 | 0.40 | 1.78 |
| HM79S-105330LF | 33 | ±15% | 100 | 1.16 | 0.11 | HM79S-125821LF | 820 | ±20% | 1 | 0.36 | 2.00 |
| HM79S-105390LF | 39 | ±15% | 100 | 1.10 | 0.12 | HM79S-125222LF | 2200 | ±20% | 1 | 0.22 | 2.85 |
| HM79S-105470LF | 47 | ±15% | 100 | 1.00 | 0.14 | HM79S-125332LF | 3300 | ±20% | 1 | 0.16 | 4.30 |
| HM79S-105560LF | 56 | ±15% | 100 | 0.93 | 0.19 | | | | | | |


Note: (1) The rated current (I_{rated}) is the approximate DC current at which inductance will be decreased by 10 % from its initial (zero DC) value or the current at which ΔT= 40°C, whichever is lower.

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Model HM79S

Outline Dimensions (mm)

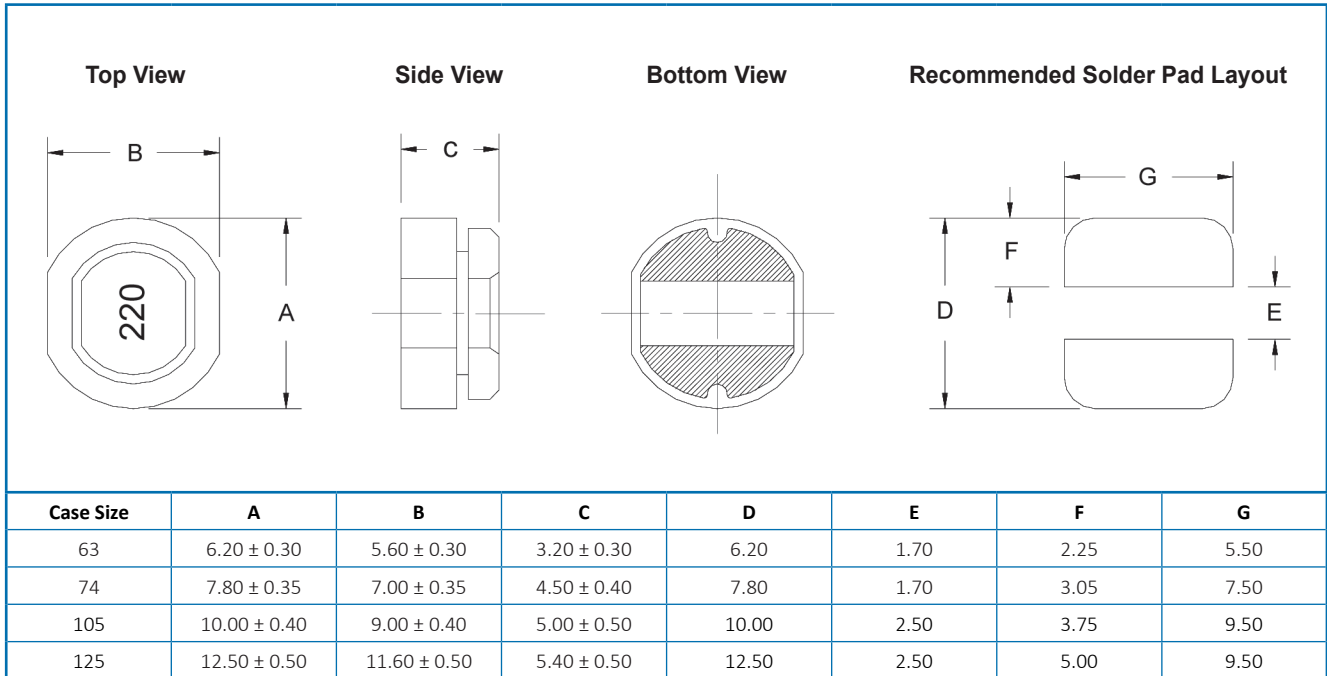

Electrical Characteristics @ 25°C

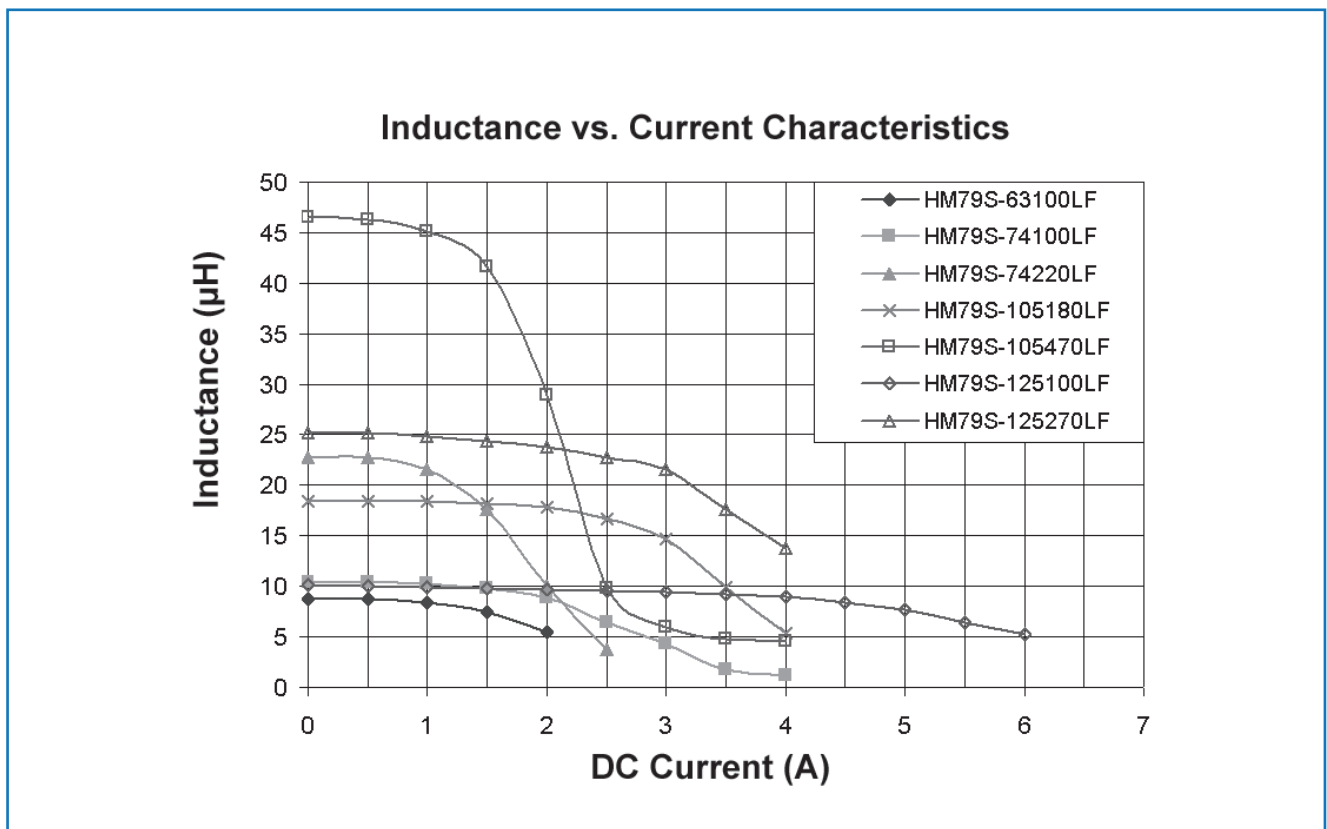

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Model HM79S

Packaging

| Embossed Tape & Reel | | | | |
|----------------------|-----------|---------------|---|---------------|
| Standard | Reel: | Diameter: | = | 13" (330.2mm) |
| | Capacity: | Case size 63 | = | 2000 units |
| | | Case size 74 | = | 1000 units |
| | | Case size 105 | = | 500 units |
| | | Case size 125 | = | 500 units |

Ordering Information

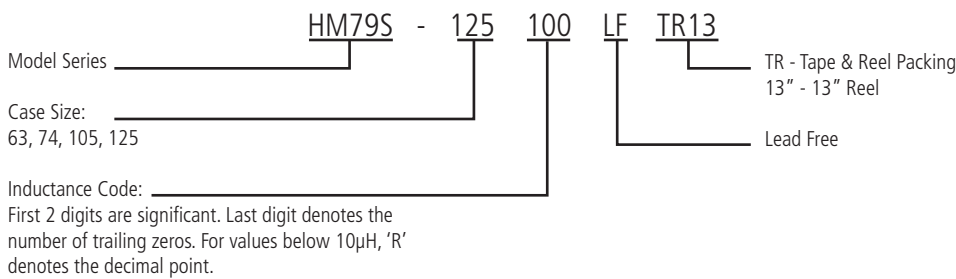

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.