Converter - Brake - Inverter Module
XPT IGBT

Three Phase Rectifier	Brake Chopper	Three Phase Inverter
V_{RRM} = 1600 V	V_{CES} = 1200 V	V_{CES} = 1200 V
I_{DAVM} = 105 A	I_{C25} = 17 A	I_{C25} = 43 A
I_{FSM} = 320 A	$V_{CE(sat)}$ = 1.8 V	$V_{CE(sat)}$ = 1.8 V

Part name (Marking on product)

MIXA30WB1200TED

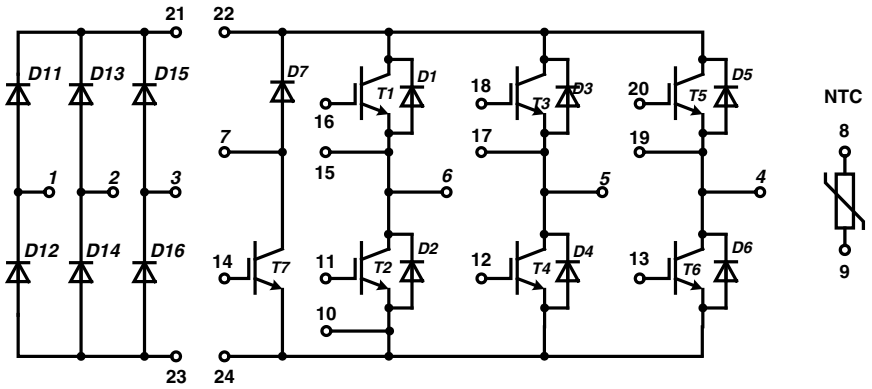

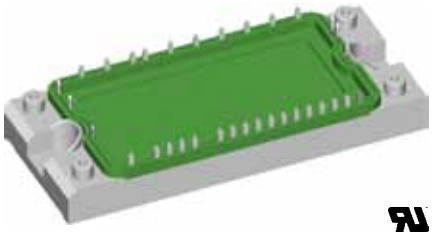

E 72873

Pin configuration see outlines.

Features:

- Easy paralleling due to the positive temperature coefficient of the on-state voltage
- Rugged XPT design (Xtreme light Punch Through) results in:
  - short circuit rated for 10 µsec.
  - very low gate charge
  - low EMI
- Thin wafer technology combined with the XPT design results in a competitive low $V_{CE(sat)}$
- SONIC™ diode
  - fast and soft reverse recovery
  - low operating forward voltage

Application:

- AC motor drives
- Solar inverter
- Medical equipment
- Uninterruptible power supply
- Air-conditioning systems
- Welding equipment
- Switched-mode and resonant-mode power supplies

Package:

- "E2-Pack" standard outline
- Insulated copper base plate
- Soldering pins for PCB mounting
- Temperature sense included

IXYS reserves the right to change limits, test conditions and dimensions.

© 2011 IXYS All rights reserved

Ouput Inverter T1 - T6

Symbol	Definitions	Conditions		Ratings min.	typ.	max.	Unit
V_{CES}	*collector emitter voltage*		T_{VJ} = 25°C			1200	V
V_{GES}	*max. DC gate voltage*	continuous				±20	V
V_{GEM}	*max. transient collector gate voltage*	transient				±30	V
I_{C25}	*collector current*		T_C = 25°C			43	A
I_{C80}			T_C = 80°C			30	A
P_{tot}	*total power dissipation*		T_C = 25°C			150	W
$V_{CE(sat)}$	*collector emitter saturation voltage*	I_C = 25 A; V_{GE} = 15 V	T_{VJ} = 25°C		1.8	2.1	V
			T_{VJ} = 125°C		2.1		V
$V_{GE(th)}$	*gate emitter threshold voltage*	I_C = 1 mA; V_{GE} = V_{CE}	T_{VJ} = 25°C	5.4	6.0	6.5	V
I_{CES}	*collector emitter leakage current*	V_{CE} = V_{CES}; V_{GE} = 0 V	T_{VJ} = 25°C		0.02	1.5	mA
			T_{VJ} = 125°C		0.2		mA
I_{GES}	*gate emitter leakage current*	V_{GE} = ±20 V				500	nA
$Q_{G(on)}$	*total gate charge*	V_{CE} = 600 V; V_{GE} = 15 V; I_C = 25 A			76		nC
$t_{d(on)}$	*turn-on delay time*	inductive load V_{CE} = 600 V; I_C = 15 A V_{GE} = ±15 V; R_G = 39 Ω	T_{VJ} = 125°C		70		ns
t_r	*current rise time*				40		ns
$t_{d(off)}$	*turn-off delay time*				250		ns
t_f	*current fall time*				100		ns
E_{on}	*turn-on energy per pulse*				2.5		mJ
E_{off}	*turn-off energy per pulse*				3.0		mJ
RBSOA	*reverse bias safe operating area*	V_{GE} = ±15 V; R_G = 39 Ω;	T_{VJ} = 125°C V_{CEK} = 1200 V			75	A
SCSOA	*short circuit safe operating area*						
t_{SC}	*short circuit duration*	V_{CE} = 900 V; V_{GE} = ±15 V;	T_{VJ} = 125°C			10	µs
I_{SC}	*short circuit current*	R_G = 39 Ω; non-repetitive			100		A
R_{thJC}	*thermal resistance junction to case*	(per IGBT)				0.84	K/W

Output Inverter D1 - D6

Symbol	Definitions	Conditions		Ratings min.	typ.	max.	Unit
V_{RRM}	*max. repetitve reverse voltage*		T_{VJ} = 25°C			1200	V
I_{F25}	*forward current*		T_C = 25°C			44	A
I_{F80}			T_C = 80°C			30	A
V_F	*forward voltage*	I_F = 30 A; V_{GE} = 0 V	T_{VJ} = 25°C		1.95	2.2	V
			T_{VJ} = 125°C		1.95		V
Q_{rr}	*reverse recovery charge*	V_R = 600 V di_F/dt = -600 A/µs I_F = 30 A; V_{GE} = 0 V	T_{VJ} = 125°C		3.5		µC
I_{RM}	*max. reverse recovery current*				30		A
t_{rr}	*reverse recovery time*				350		ns
E_{rec}	*reverse recovery energy*				0.9		mJ
R_{thJC}	*thermal resistance junction to case*	(per diode)				1.2	K/W

T_C = 25°C unless otherwise stated

© 2011 IXYS All rights reserved

Brake T7

Symbol	Definitions	Conditions		Ratings min.	typ.	max.	Unit
V_{CES}	*collector emitter voltage*		T_{VJ} = 25°C			1200	V
V_{GES}	*max. DC gate voltage*	continuous				±20	V
V_{GEM}	*max. transient collector gate voltage*	transient				±30	V
I_{C25}	*collector current*		T_C = 25°C			17	A
I_{C80}			T_C = 80°C			12	A
P_{tot}	*total power dissipation*		T_C = 25°C			60	W
$V_{CE(sat)}$	*collector emitter saturation voltage*	I_C = 9 A; V_{GE} = 15 V	T_{VJ} = 25°C		1.8	2.1	V
			T_{VJ} = 125°C		2.1		V
$V_{GE(th)}$	*gate emitter threshold voltage*	I_C = 0.3 mA; V_{GE} = V_{CE}	T_{VJ} = 25°C	5.4	6.0	6.5	V
I_{CES}	*collector emitter leakage current*	V_{CE} = V_{CES}; V_{GE} = 0 V	T_{VJ} = 25°C			0.1	mA
			T_{VJ} = 125°C		0.1		mA
I_{GES}	*gate emitter leakage current*	V_{GE} = ±20 V				500	nA
$Q_{G(on)}$	*total gate charge*	V_{CE} = 600 V; V_{GE} = 15 V; I_C = 10 A			28		nC
$t_{d(on)}$	*turn-on delay time*	inductive load V_{CE} = 600 V; I_C = 10 A V_{GE} = ±15 V; R_G = 100 Ω	T_{VJ} = 125°C		70		ns
t_r	*current rise time*				40		ns
$t_{d(off)}$	*turn-off delay time*				250		ns
t_f	*current fall time*				100		ns
E_{on}	*turn-on energy per pulse*				1.1		mJ
E_{off}	*turn-off energy per pulse*				1.1		mJ
RBSOA	*reverse bias safe operating area*	V_{GE} = ±15 V; R_G = 100 Ω;	T_{VJ} = 125°C V_{CEK} = 1200 V			30	A
SCSOA	*short circuit safe operating area*						
t_{SC}	*short circuit duration*	V_{CE} = 900 V; V_{GE} = ±15 V;	T_{VJ} = 125°C			10	µs
I_{SC}	*short circuit current*	R_G = 100 Ω; non-repetitive			40		A
R_{thJC}	*thermal resistance junction to case*	(per IGBT)				2.0	K/W

Brake Chopper D7

Symbol	Definitions	Conditions		Ratings min.	typ.	max.	Unit
V_{RRM}	*max. repetitive reverse voltage*		T_{VJ} = 25°C			1200	V
I_{F25}	*forward current*		T_C = 25°C			12	A
I_{F80}			T_C = 80°C			8	A
V_F	*forward voltage*	I_F = 5 A; V_{GE} = 0 V	T_{VJ} = 25°C		1.95	2.2	V
			T_{VJ} = 125°C		1.95		V
I_R	*reverse current*	V_R = V_{RRM}	T_{VJ} = 25°C			0.5	mA
			T_{VJ} = 125°C		0.5		mA
Q_{rr}	*reverse recovery charge*	V_R = 600 V di_F/dt = 200 A/µs I_F = 5 A; V_{GE} = 0 V	T_{VJ} = 125°C		0.6		µC
I_{RM}	*max. reverse recovery current*				6		A
t_{rr}	*reverse recovery time*				350		ns
E_{rec}	*reverse recovery energy*				0.2		mJ
R_{thJC}	*thermal resistance junction to case*	(per diode)				3.4	K/W

T_C = 25°C unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

© 2011 IXYS All rights reserved

Input Rectifier Bridge D11 - D16

Symbol	Definitions	Conditions		Ratings min.	typ.	max.	Unit
V_{RRM}	*max. repetitive reverse voltage*		T_{VJ} = 25°C			1600	V
I_{FAV}	*average forward current*	sine 180°	T_C = 80°C			37	A
I_{DAVM}	*max. average DC output current*	rect.; d = $^1/_3$	T_C = 80°C			105	A
I_{FSM}	*max. forward surge current*	t = 10 ms; sine 50 Hz	T_{VJ} = 25°C			320	A
			T_{VJ} = 125°C			280	A
I^2t	*I^2t value for fusing*	t = 10 ms; sine 50 Hz	T_{VJ} = 25°C			510	A^2s
			T_{VJ} = 125°C			390	A^2s
P_{tot}	*total power dissipation*		T_C = 25°C			110	W
V_F	*forward voltage*	I_F = 50 A	T_{VJ} = 25°C		1.34	1.7	V
			T_{VJ} = 125°C		1.34		V
I_R	*reverse current*	$V_R = V_{RRM}$	T_{VJ} = 25°C			0.02	mA
			T_{VJ} = 125°C		0.2		mA
R_{thJC}	*thermal resistance junction to case*	(per diode)				1.1	K/W

Temperature Sensor NTC

Symbol	Definitions	Conditions	Ratings min.	typ.	max.	Unit
R_{25}	*resistance*	T_C = 25°C	4.75	5.0	5.25	kΩ
$B_{25/50}$				3375		K

Module

Symbol	Definitions	Conditions	Ratings min.	typ.	max.	Unit
T_{VJ}	*operating temperature*		-40		125	°C
T_{VJM}	*max. virtual junction temperature*				150	°C
T_{stg}	*storage temperature*		-40		125	°C
V_{ISOL}	*isolation voltage*	$I_{ISOL} \leq$ 1 mA; 50/60 Hz			2500	V~
CTI	*comparative tracking index*				-	
M_d	*mounting torque (M5)*		3		6	Nm
d_S	*creep distance on surface*		6			mm
d_A	*strike distance through air*		6			mm
$R_{pin\text{-}chip}$	*resistance pin to chip*			5		mΩ
R_{thCH}	*thermal resistance case to heatsink*	with heatsink compound		0.02		K/W
Weight				180		g

Equivalent Circuits for Simulation



Symbol	Definitions	Conditions		Ratings min.	typ.	max.	Unit
V_0	*rectifier diode*	D8 - D13	T_{VJ} = 150°C			0.88	V
R_0						9	mΩ
V_0	*IGBT*	T1 - T6	T_{VJ} = 150°C			1.1	V
R_0						55	mΩ
V_0	*free wheeling diode*	D1 - D6	T_{VJ} = 150°C			1.2	V
R_0						27	mΩ
V_0	*IGBT*	T7	T_{VJ} = 150°C			1.1	V
R_0						153	mΩ
V_0	*free wheeling diode*	D7	T_{VJ} = 150°C			1.15	V
R_0						170	mΩ

T_C = 25°C unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

© 2011 IXYS All rights reserved

Circuit Diagram

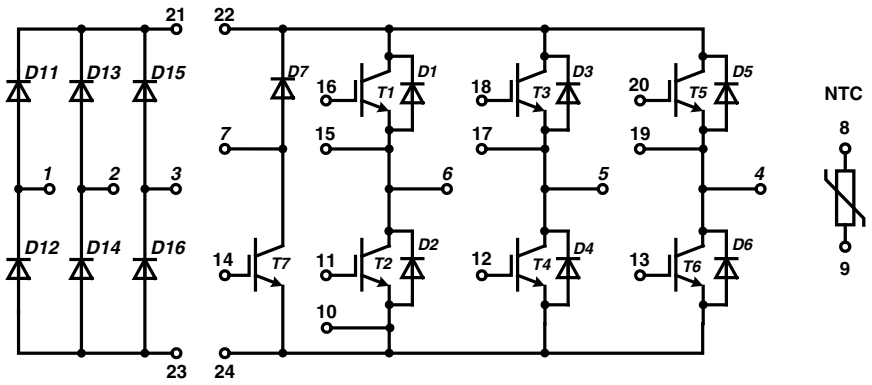

Outline Drawing

Dimensions in mm (1 mm = 0.0394“)

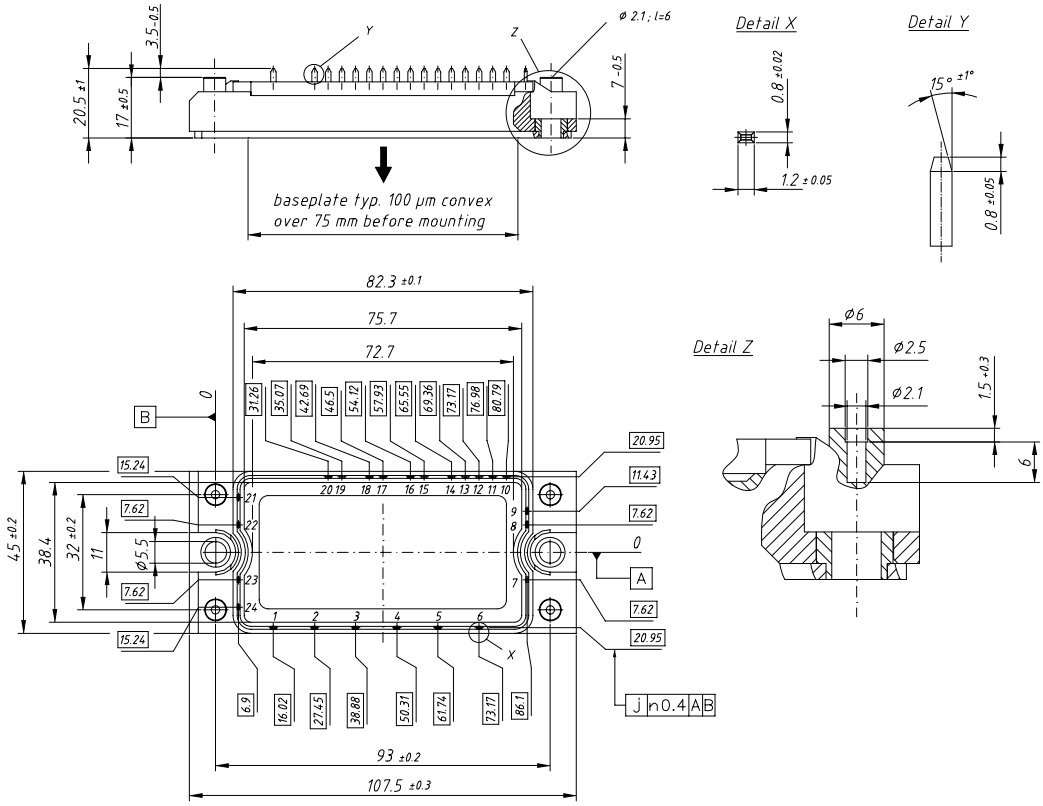

Product Marking

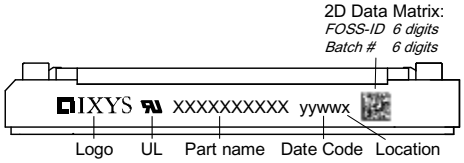

Part number

M = Module
I = IGBT
X = XPT
A = Standard
30 = Current Rating [A]
WB = 6-Pack + 3~ Rectifier Bridge & Brake Unit
1200 = Reverse Voltage [V]
T = NTC
ED = E2-Pack

Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Ordering Code
Standard	MIXA30WB1200 TED	MIXA30WB1200TED	Box	6	509 119

IXYS reserves the right to change limits, test conditions and dimensions.

20110916c

© 2011 IXYS All rights reserved

Inverter T1 - T6

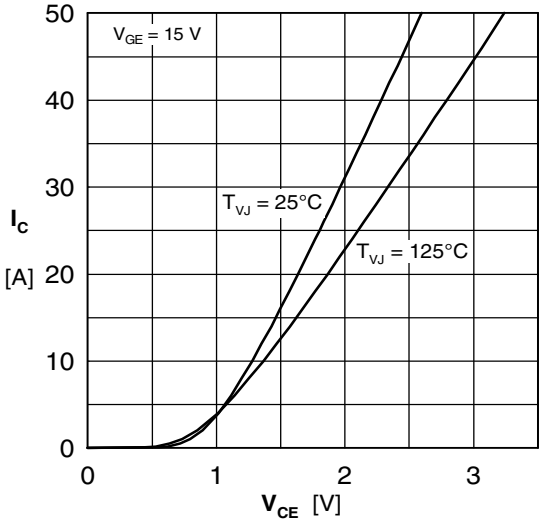

Fig. 1 Typ. output characteristics

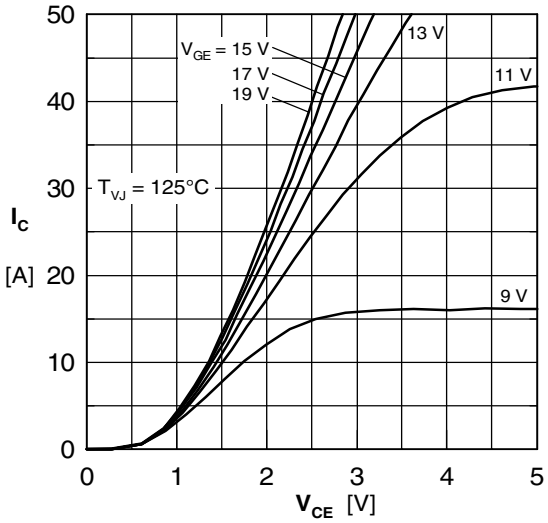

Fig. 2 Typ. output characteristics

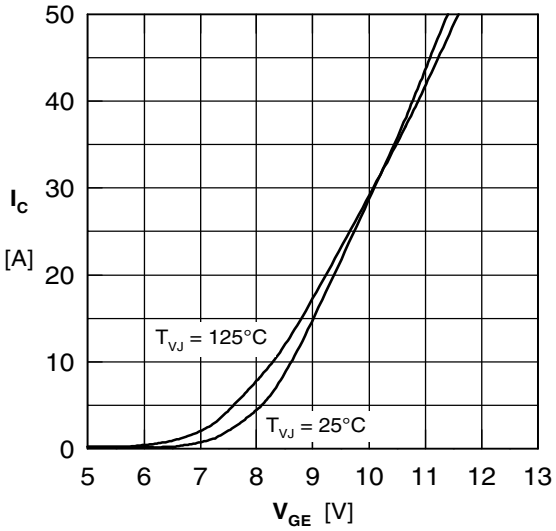

Fig. 3 Typ. tranfer characteristics

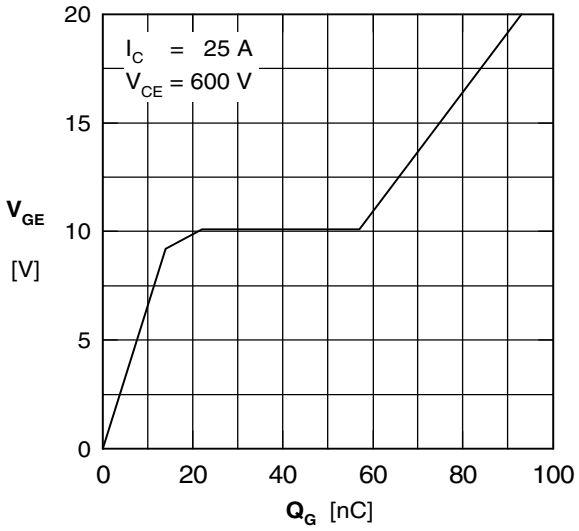

Fig. 4 Typ. turn-on gate charge

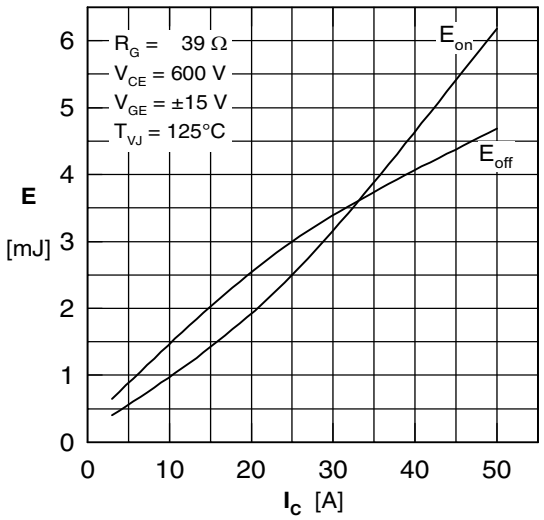

Fig. 5 Typ. switching energy vs. collector current

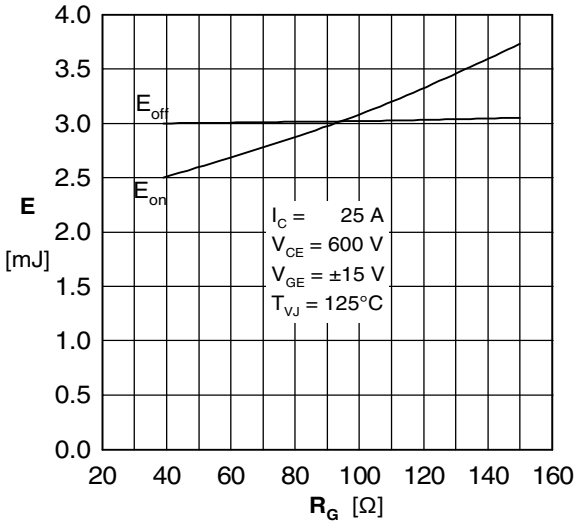

Fig. 6 Typ. switching energy vs. gate resistance

IXYS reserves the right to change limits, test conditions and dimensions.

© 2011 IXYS All rights reserved

Inverter D1 - D6

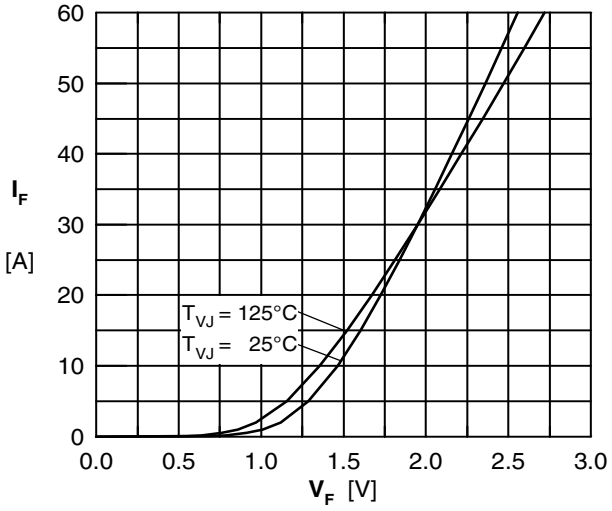

Fig. 7 Typ. Forward current versus V_F

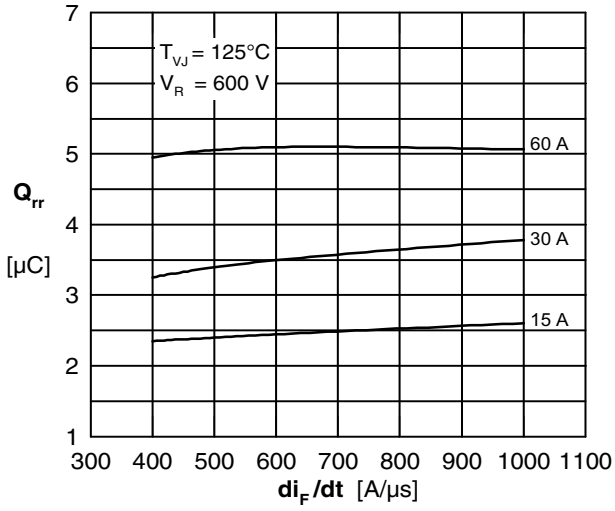

Fig. 8 Typ. reverse recov.charge Q_{rr} vs. di/dt

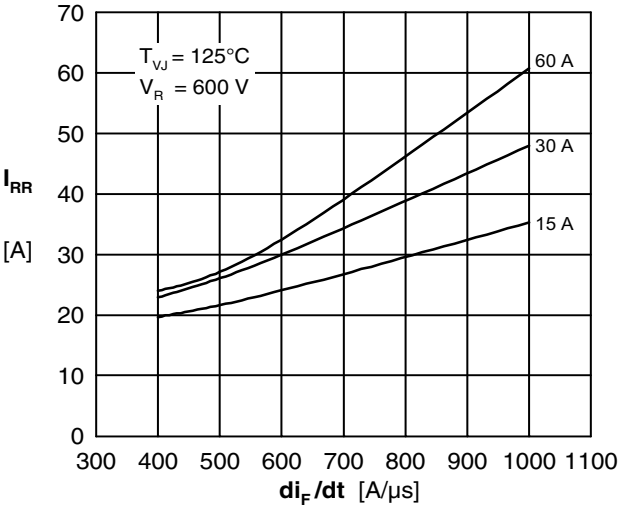

Fig. 9 Typ. peak reverse current I_{RM} vs. di/dt

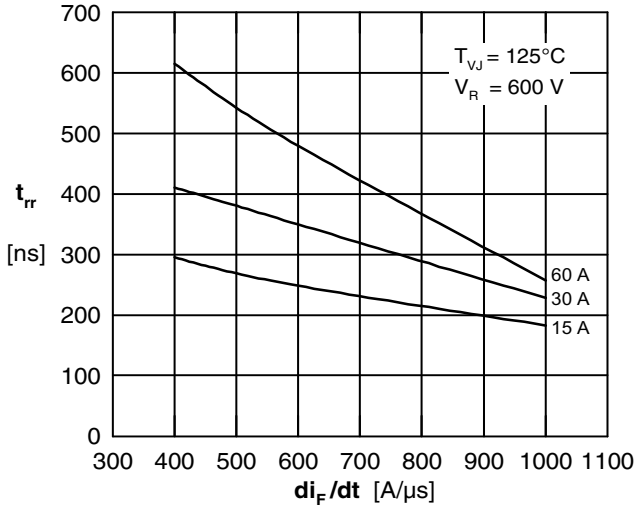

Fig. 10 Typ. recovery time t_{rr} versus di/dt

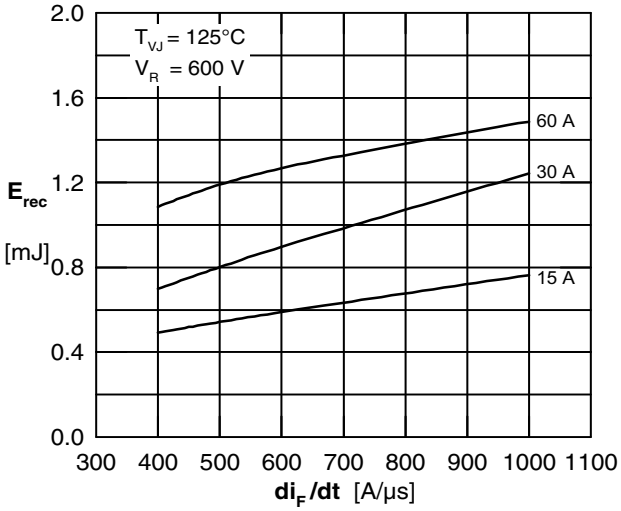

Fig.11 Typ. recovery energy E_{rec} versus di/dt

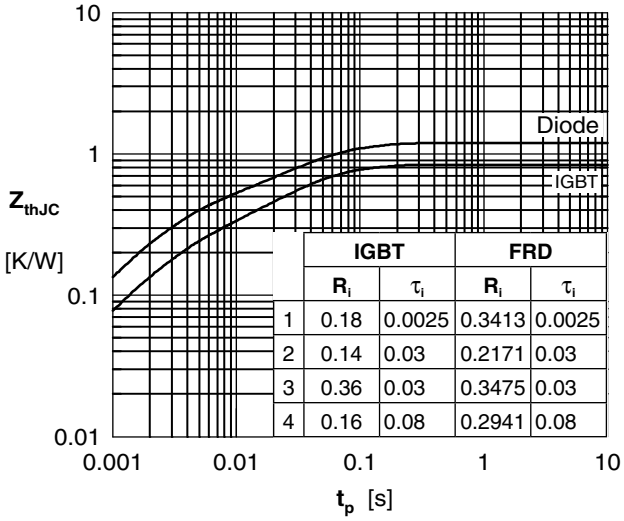

	IGBT		FRD	
	R_i	τ_i	R_i	τ_i
1	0.18	0.0025	0.3413	0.0025
2	0.14	0.03	0.2171	0.03
3	0.36	0.03	0.3475	0.03
4	0.16	0.08	0.2941	0.08

Fig. 12 Typ. transient thermal impedance

© 2011 IXYS All rights reserved

Brake T7 & D7

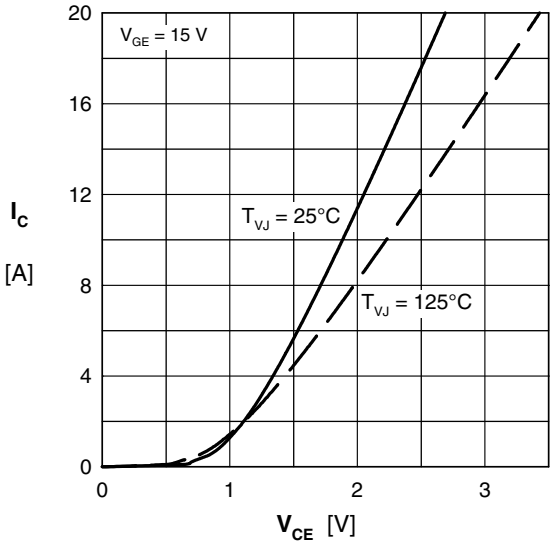

Fig. 13 Typ. output characteristics

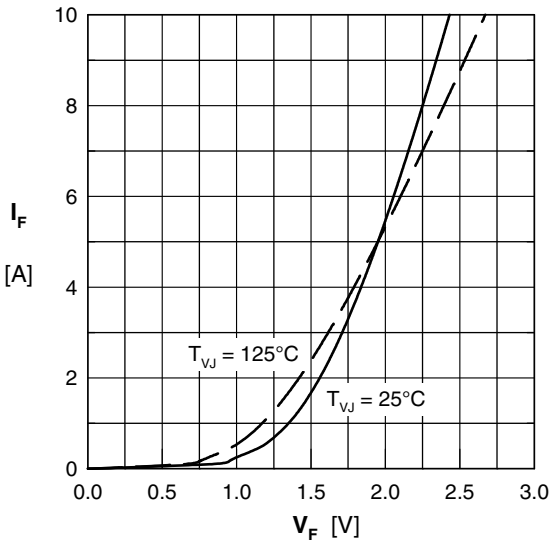

Fig. 14 Typ. forward characteristics

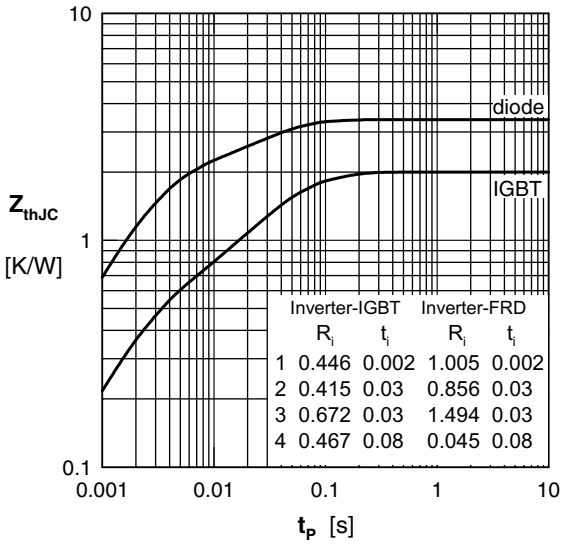

Fig. 15 Typ. transient thermal impedance

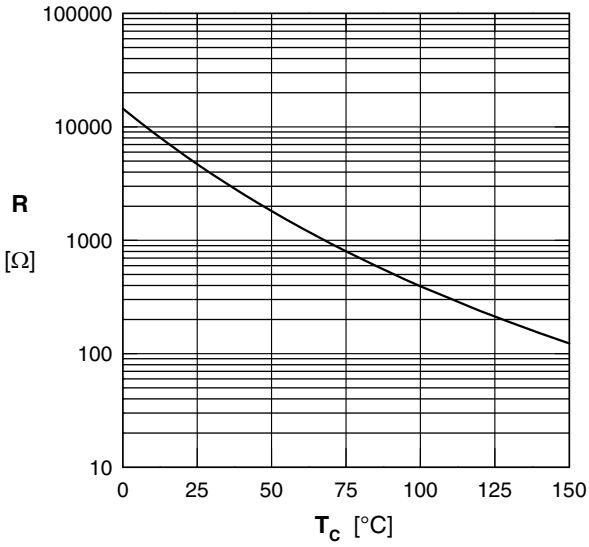

Fig.16 Typ. NTC resistance vs. temperature

© 2011 IXYS All rights reserved