


### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Fast switching for high efficiency
- Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2011/65/EU



### TO-220AC

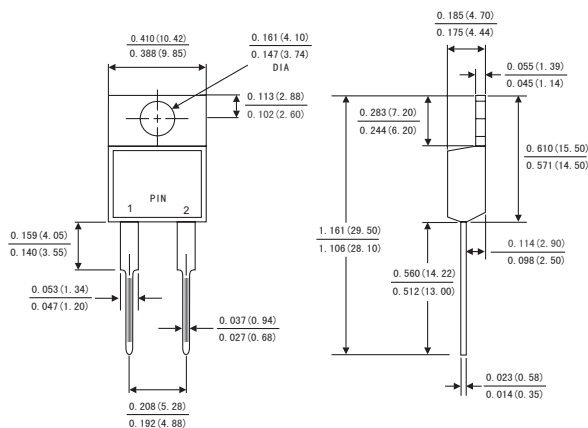

### MECHANICAL DATA

- Case: JEDEC TO-220AC molded plastic body
- Terminals: Lead solderable per MIL-STD-750,method 2026
- Polarity: As marked
- Mounting Position: Any
- Weight: 0.08ounce, 2.24 gram

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

	Symbols	MUR820	MUR840	MUR860	Units
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	200	400	600	Volts
Maximum RMS voltage	V <sub>RMS</sub>	140	280	420	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	200	400	600	Volts
Maximum average forward rectified current(see Fig.1)	I(AV)	8.0			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	90			Amps
Maximum instantaneous forward voltage at 8.0 A(Note 1)	V <sub>F</sub>	0.975	1.3	1.7	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	T <sub>a</sub> =25°C	5			uA
	T <sub>a</sub> =125°C	500			
Maximum Reverse Recovery Time (Note 2)	T <sub>rr</sub>	35			ns
Typical thermal resistance (Note 3)	R <sub>θJC</sub>	2.5			°C/W
Operating junction temperature range	T <sub>J</sub>	-55 to+150			°C
Storage temperature range	T <sub>STG</sub>	-55 to+150			°C

- Notes: 1. Pulse test: 300μs pulse width,1% duty cycle  
 2. Reverse recovery test conditions I<sub>F</sub>=0.5A,I<sub>R</sub>=1.0A, I<sub>rr</sub>=0.25A  
 3. Thermal resistance from junction to case

# RATINGS AND CHARACTERISTIC CURVES MUR820 THRU MUR860

FIG.1-FORWARD CURRENT DERATING CURVE

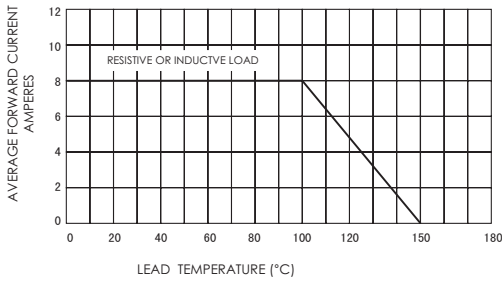


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

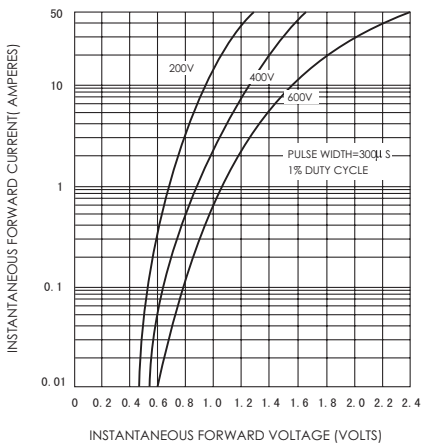


FIG.5-TYPICAL JUNCTION CAPACITANCE

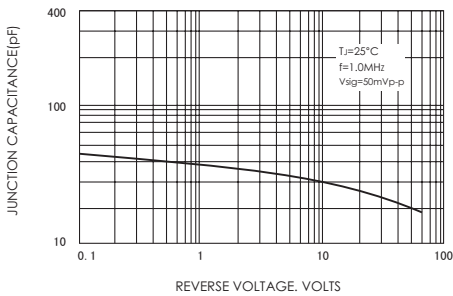


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

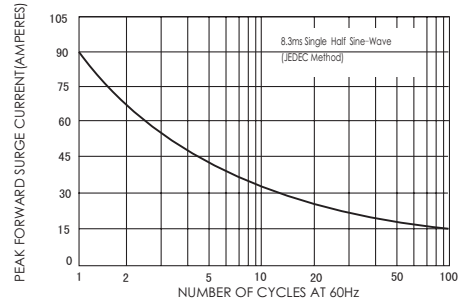


FIG.4-TYPICAL REVERSE CHARACTERISTICS

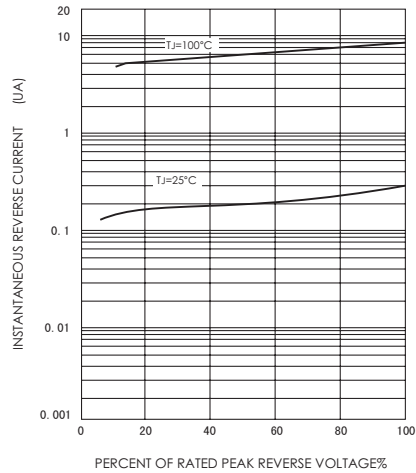


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

