

## SJA Series

### Features

- 105°C, 2,000 hours assured
- High temperature category range, with 7mm height
- RoHS Compliance




Sleeve & Marking Color: Brown & White

### Specifications

Items	Performance																											
Category Temperature Range	-55°C ~ +105°C																											
Capacitance Tolerance	±20% (at 120Hz, 20°C)																											
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V																											
Tanδ (at 120Hz, 20°C)	<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> </tr> </thead> <tbody> <tr> <td>Tanδ (max)</td> <td>0.35</td> <td>0.23</td> <td>0.20</td> <td>0.17</td> <td>0.15</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> </tr> </tbody> </table>	Rated Voltage	4	6.3	10	16	25	35	50	63	Tanδ (max)	0.35	0.23	0.20	0.17	0.15	0.12	0.10	0.10									
Rated Voltage	4	6.3	10	16	25	35	50	63																				
Tanδ (max)	0.35	0.23	0.20	0.17	0.15	0.12	0.10	0.10																				
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> </tr> </thead> <tbody> <tr> <td>Impedance Ratio Z(-25°C)/Z(+20°C)</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C)/Z(+20°C)</td> <td>12</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>4</td> <td>3</td> </tr> </tbody> </table>	Rated Voltage	4	6.3	10	16	25	35	50	63	Impedance Ratio Z(-25°C)/Z(+20°C)	6	4	3	3	2	2	2	2	Z(-55°C)/Z(+20°C)	12	10	8	6	4	4	4	3
Rated Voltage	4	6.3	10	16	25	35	50	63																				
Impedance Ratio Z(-25°C)/Z(+20°C)	6	4	3	3	2	2	2	2																				
Z(-55°C)/Z(+20°C)	12	10	8	6	4	4	4	3																				
Endurance	<table border="1"> <thead> <tr> <th>Test Time</th> <th>2,000 Hrs</th> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±25% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 2,000 hours at 105°C.</p>	Test Time	2,000 Hrs	Capacitance Change	Within ±25% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Within specified value																			
Test Time	2,000 Hrs																											
Capacitance Change	Within ±25% of initial value																											
Tanδ	Less than 200% of specified value																											
Leakage Current	Within specified value																											
Shelf Life Test	Test time: 1,000 hours; other items are the same as those for the Endurance.																											
Ripple Current & Frequency Multipliers	<table border="1"> <thead> <tr> <th>Cap.(μF) \ Freq.(Hz)</th> <th>60 (50)</th> <th>120</th> <th>500</th> <th>1k</th> <th>10k up</th> </tr> </thead> <tbody> <tr> <td>Under 47</td> <td>0.75</td> <td>1.00</td> <td>1.20</td> <td>1.30</td> <td>1.45</td> </tr> <tr> <td>100 to 470</td> <td>0.88</td> <td>1.00</td> <td>1.10</td> <td>1.15</td> <td>1.20</td> </tr> </tbody> </table>	Cap.(μF) \ Freq.(Hz)	60 (50)	120	500	1k	10k up	Under 47	0.75	1.00	1.20	1.30	1.45	100 to 470	0.88	1.00	1.10	1.15	1.20									
Cap.(μF) \ Freq.(Hz)	60 (50)	120	500	1k	10k up																							
Under 47	0.75	1.00	1.20	1.30	1.45																							
100 to 470	0.88	1.00	1.10	1.15	1.20																							

### Diagram of Dimensions

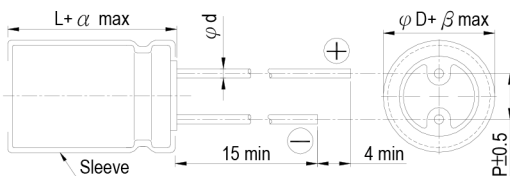

### Lead Spacing and Diameter

Unit: mm

φ D	4	5	6.3	8
P	1.5	2.0	2.5	3.5
φ d	0.45		0.5	
α	1.0			
β	0.5			

### Dimension & Permissible Ripple Current

Dimension: φ D×L(mm)

Ripple Current: mA/rms at 120 Hz, 105°C

μF	V. DC Contents	4V (0G)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63V (1J)	
		φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA
1	010													4×7	10	4×7	11
2.2	2R2													4×7	15	4×7	17
3.3	3R3													4×7	18	4×7	21
4.7	4R7													4×7	23	5×7	26
10	100							4×7	25	4×7	26	4×7	22	5×7	23	5×7	26
22	220			4×7	31	4×7	32	5×7	39	5×7	41	6.3×7	47	6.3×7	53	8×7	70
33	330	4×7	32	4×7	32	4×7	35	5×7	43	6.3×7	53	8×7	71	8×7	76		
47	470	4×7	38	4×7	38	5×7	47	6.3×7	59	6.3×7	65	8×7	83	8×7	85		
100	101	5×7	61	6.3×7	75	6.3×7	80	6.3×7	90	8×7	125	8×7	145				
220	221	6.3×7	90	6.3×7	99	8×7	140	8×7	146								
330	331	8×7	156	8×7	156	8×7	160										
470	471	8×7	180	8×7	180												

### Part Numbering System

SJA series	470μF	±20%	6.3V	Bulk Package	Gas Type	8 φ × 7L	Pb-free and PET coating case
<b>SJA</b>	<b>471</b>	<b>M</b>	<b>0J</b>	<b>BK</b>	-	<b>0807</b>	
Series	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration & Package	Rubber Type	Case Size	Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 10.