


REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	12.12.24	A	INITIAL RELEASE.	JORRY DUAN
CY13-5880	13.01.09	B	CHG. TITLE	JORRY DUAN
CY13-5950	13.01.25	C	CANCEL TINNED	JORRY DUAN

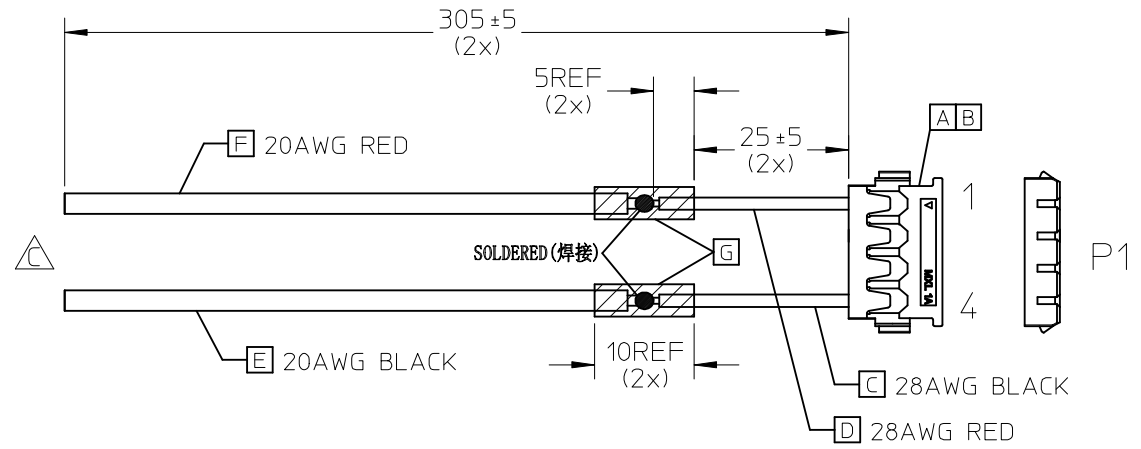

NOTES  
 1. THIS PRODUCT MUST MEET EU 2002/95 EC ROHS COMPLIANCE.

此产品需符合EU 2002/95 EC ROHS 环保要求  
 2. ELECTRICAL PERFORMANCE REFER TO ES-000.  
 电气特性参考ES-000.

3. 28AWG WIRE SPEC.(线的规格)  
 1) WIRE OD:0.7+/-0.05MM,  
 2) WIRE INSULATION: FEP  
 3) CONDUCTOR:7/0.127 TINNED COPPER  
 4)UL STYLE:UL1371  
 5)TEMPERATURE RATING:105℃  
 6) RATED VOLTAGE:300V

4. 20AWG WIRE SPEC.(线的规格)  
 1) WIRE OD:1.78+/-0.05MM,  
 2) WIRE INSULATION: PVC  
 3) CONDUCTOR:26/0.16 TINNED COPPER  
 4)UL STYLE:UL1569  
 5)TEMPERATURE RATING:105℃  
 6) RATED VOLTAGE:300V  
 5. STICK UL LABEL ON THE OUTSIDE CARTON.

外箱上贴UL 标签

P1	COLOR
1	RED
2	
3	
4	BLACK

G	HST 2MM BLACK	A/R	
F	20AWG;PLTD,PVC,RD;1.78mm;UL1569	A/R	
E	20AWG;PLTD,PVC,BK;1.78mm;UL1569	A/R	
D	28AWG;FEP;RED;OD:0.7MM;UL1371;VW-1.	A/R	
C	28AWG;FEP;BLACK;OD:0.7MM;UL1371;VW-1.	A/R	
B	TERMINAL 28-30AWG		2
A	4CKT HSG,WHITE		1
ITEM	DESCRIPTION	L(MM)	Q'TY

EC NO: CPG2013-2410 DRWN: CXIA003 CHKD: JDUAN APPR: FNIE	2013/01/26 2013/01/26 2013/01/28	DESCRIPTION QUALITY SYMBOLS $F_A=0$ $F_E=0$ $F_F=0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE <b>MM ONLY</b>		SCALE ---	DESIGN UNITS <b>METRIC</b>	THIRD ANGLE PROJECTION
			4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- 0 PLACE ± --- ± ---	mm      INCH	DRAWN BY CXIA003	DATE 2012/12/25	TITLE $\triangle B$ 2PINS WIRING PICO EZMATE 12" 20/28AWG	<b>molex</b>	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			ANGULAR ± ---°		MATERIAL NO. <b>688014085</b>	DOCUMENT NO. <b>SD-68801-087</b>	SHEET NO. 1 OF 1		
SIZE $\triangle A$ 4			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						