

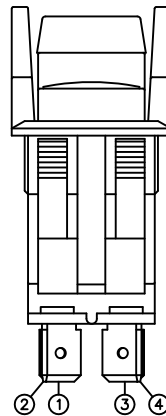
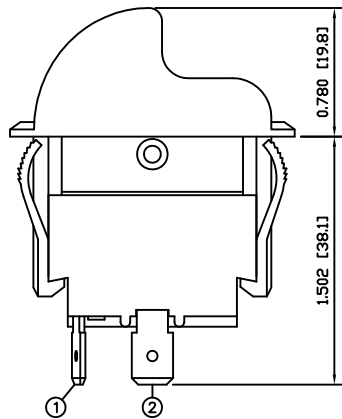



POSITION 1 / POSITION 2

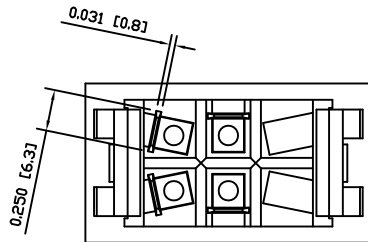

SUGGESTED PANEL CUTOUT



SCHEMATIC



SPECIFICATIONS

FUNCTION:
2P1T OFF-ON with Actuator Lock

RATINGS:
ANSI/UL 1054 and CAN/CSA C22.2 No. 55 (E194579):
20A 125VAC [cURus]
12A 250VAC [cURus]

ELECTRICAL LIFE:
6,000 Cycles [cURus]

TEMPERATURE:
Operating: -20°C to 65°C [cURus]

APPROVALS:



MATERIALS

UPPER BODY:
Polyamide 6/6 (PA66)

LOWER BODY:
Phenolic

ACTUATOR:
Polyamide 6/6 (PA66)

ACTUATOR LOCK:
Polyamide 6/6 (PA66)

CONTACTS:
Silver Plated Copper

TERMINALS:
Brass

COLORS AND MARKINGS

UPPER BODY:
Black


LOWER BODY:
Black

ACTUATOR:
Red

ACTUATOR LOCK:
Yellow

MARKINGS:
ON/OFF

MARKING COLOR:
White



HY7-42D-196

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A
REV.

INITIAL RELEASE
DESCRIPTION

PCRD0196
PCR

09/11/05
DATE

CAB
DRAWN BY

DIMENSIONS
INCHES [MILLIMETERS]
GENERAL TOLERANCES
±0.008 [±0.2] / ±1'

SCALE
DRAWING NOT TO SCALE

PROJECTION
FIRST ANGLE

DRAWING NUMBER
34-HY742D196

DATE
NOVEMBER 05, 2009

REVISION
A