





1. Dimensions:

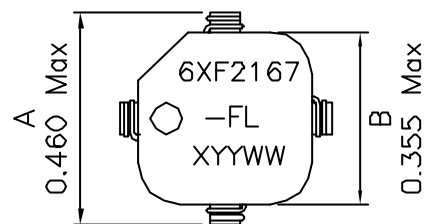


BOTTOM VIEW

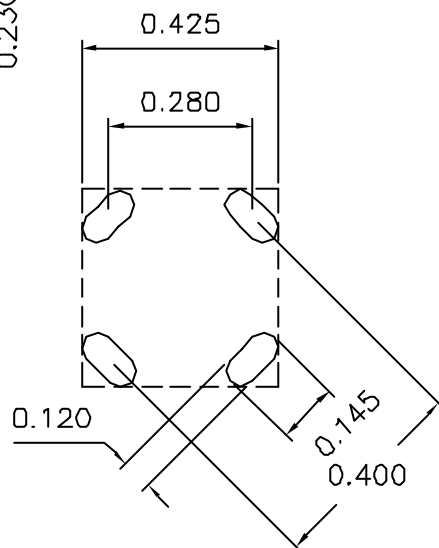

RECOMMENDED LAYOUT PATTERN
(TOP VIEW)

DOC. REV A/1

2. Schematic:



3. Electrical Specifications: @25°C

OCL: P2-3 21.6uH Min @10KHz, 0.1V

LL: P2-3 0.75uH Max @100KHz, 0.1V

Short P4-1

DCR: P2-3 0.160 Ohms Max

DCR: P4-1 18.0 Ohms Max

Rated Current: 1.5Adc

Isolation Voltage: 500Vrms, Wdg. to Wdg.

Turns Ratio: P2-3:4-1 = 1:12

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C, UL file E151556,
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc.	Title: FLYBACK TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED	P/N: 6XF2167-FL	REV. A
	TOLERANCES: .xxx ±0.010	DWN. 廖玉坤	Mar-26-04
	Dimensions in Inch	CHK. 李清儿	Mar-26-04
	SCALE 2:1 SHT 1 OF 1	APP. BW	Mar-26-04