
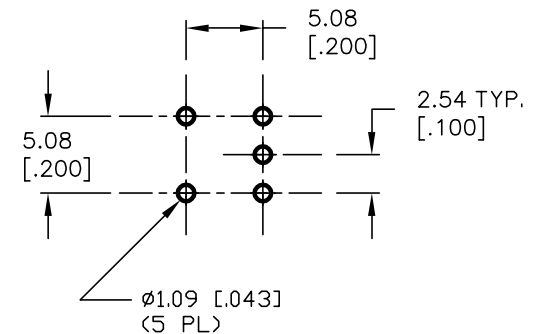





CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3	OPEN	2-1

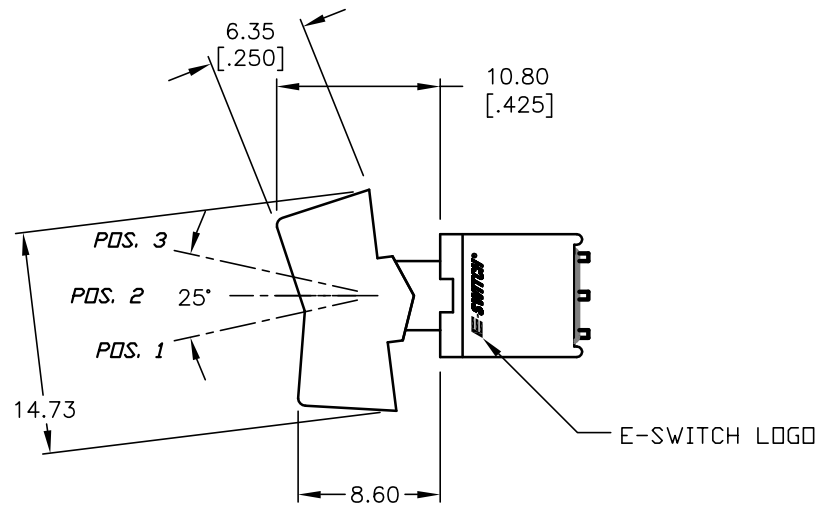

RECOMMENDED P.C.B. LAYOUT

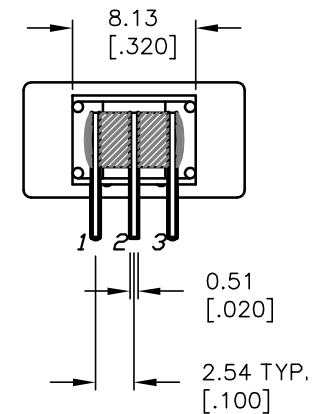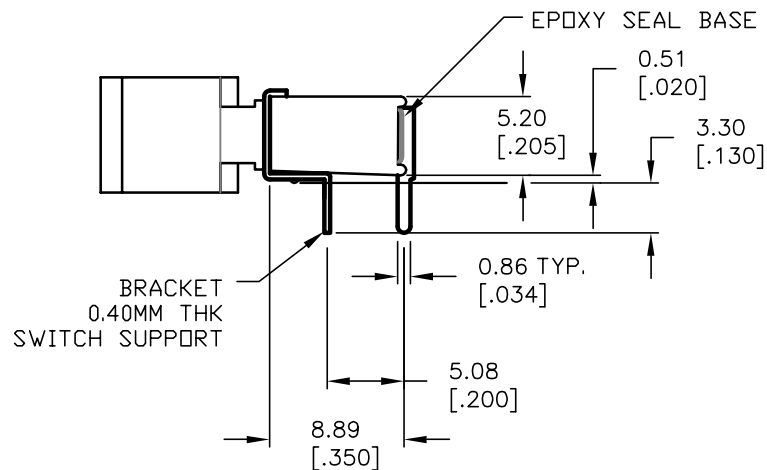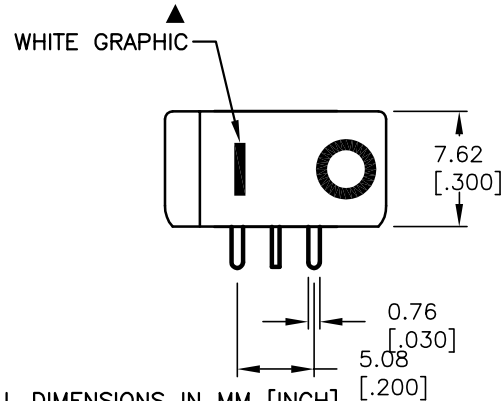

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 0.4VA @20V max (AC or DC)
- ▲ FIXED TERMINAL/MOVING CONTACT MATERIAL:
COPPER ALLOY w/GOLD PLATE over Silver plate.
- ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
- INSULATION RESISTANCE: 1,000 M ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP. -30°C to +85°C
- ▲10. ACTUATOR: NYLON, BLACK STD.
- ▲11. ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

TITLE

400AWMSP1R1BLKM6RE I/O MARKING

SCALE

2:1

DATE

9/10/04

DR

AR

DWG

T403112

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	14308	RELEASED FOR PRODUCTION	9/10/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD