

6

5

4

3




2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/07/11	

APPROVED: _____

DATE: _____ TITLE: _____

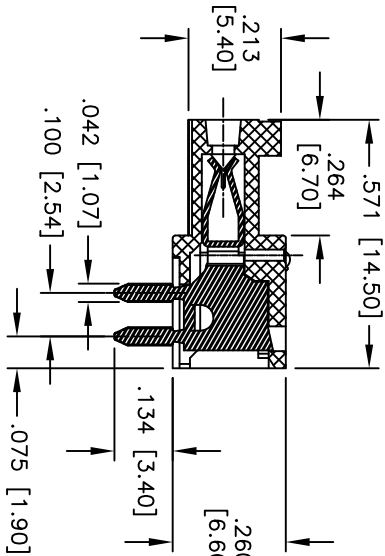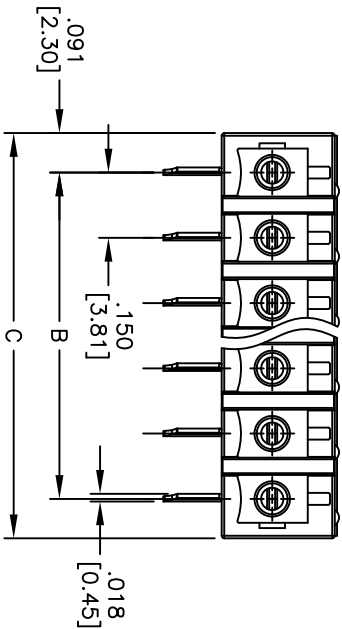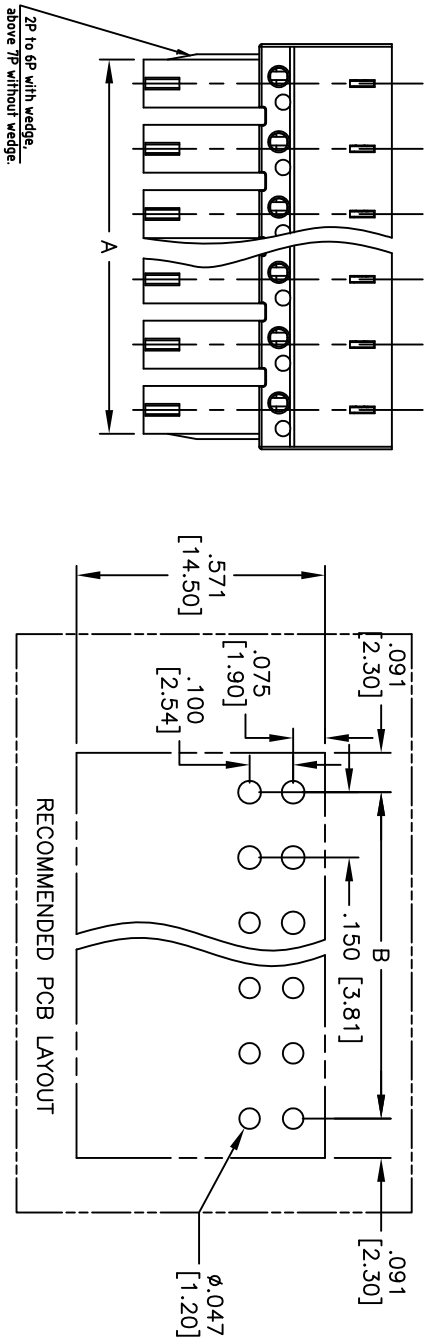

Positions: 2 thru 24
A = .150 [3.81] x No. of (Poles-1) + .110 [2.80]
B = .150 [3.81] x No. of (Poles-1)
C = .150 [3.81] x No. of (Poles-1) + .181 [4.60]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TERMINAL BLOCK, PCB, .150 [3.81] PITCH

SPECIFICATIONS:
Material: Thermoplastic, rated UL 94V-0
Insulator color: Green
Contact: Phosphor Bronze, Tin plated
Electrical:
Operation voltage: 300 VAC max
Current rating: 8 Amps
Withstanding Voltage: 1.6KV
Environmental:
Operating temperature: -40°C to +115°C
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		TITLE	
.X ± .10	ØX ± .10	SIZE	PART NO.
.XX ± .020	ØXX ± .015	X	EB50-A-XX-B
.XXX ± .015	ØXXX ± .010	REF: S00007T	SCALE: NTS
APPROVALS	DATE	SHEET 1 OF 1	
DRAWN	4/07/11	REV.	
CHECKED			
APPROVED			