



1. Mechanical Dimensions:

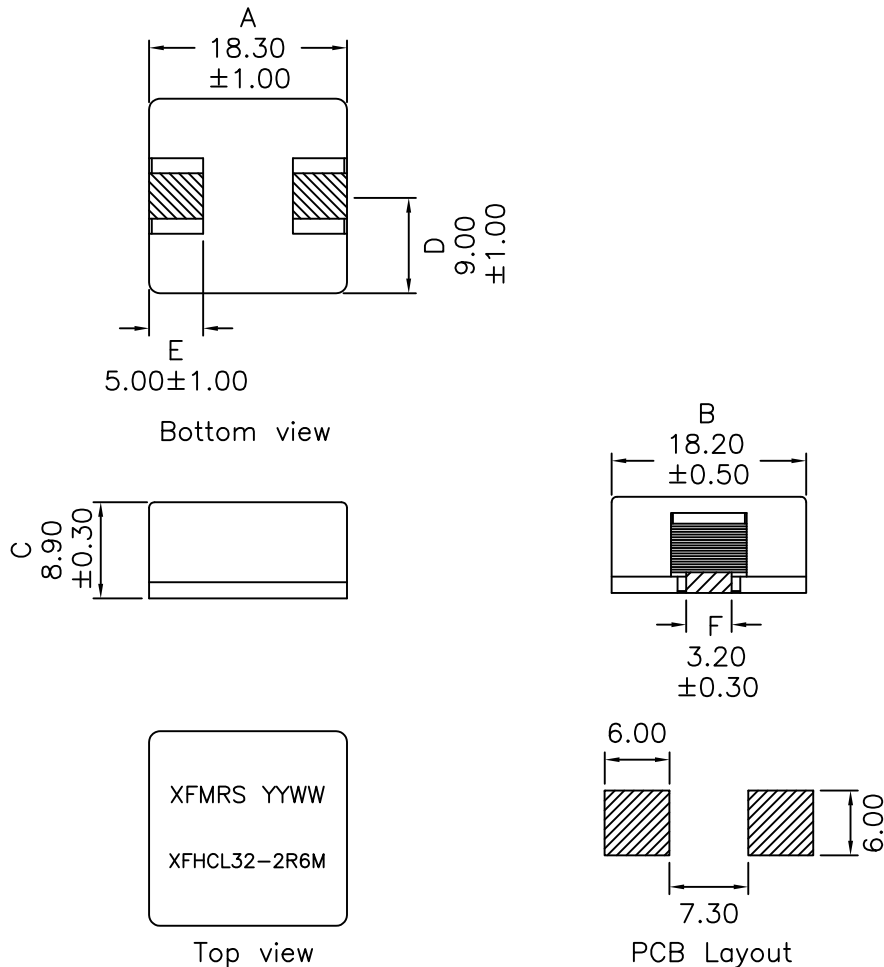

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +125°C
7. Ambient temperature: -40°C to +85°C
8. Storage Temperature Range: -20°C to +40°C
9. Aqueous wash compatible
8. SMD Lead Coplanarity: $\pm 0.004''$ (0.102mm)
10. Electrical and mechanical specifications 100% tested
11. RoHS Compliant Component
12. Recommended IR Reflow peak temp of 245C Max.

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 2.6uH \pm 20% @100KHz 10mA

Q: 5 Min @100KHz 100mV

Rated inductance: 2.15uH Typ @100KHz 10mA @31.5A

Rated current: 31.5A Max (Based on 50°C Rise in Temp)


I_{sat}: 50.0A Typ (Based on 30% drop in OCL Max)

DCR: 1.80 mOhms Max

SRF: 42MHz Typ

DOC. REV: A/1

XFMRS Inc www.XFMRS.com	Title: SMD Flat Wire High Current Inductor		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx \pm 0.25 Dimensions in MM	P/N: XFHCL32-2R6M	REV. A
SHEET 1 OF 2	DWN.	Yuan	Aug-02-13
	APP.	YK Liao	Aug-02-13

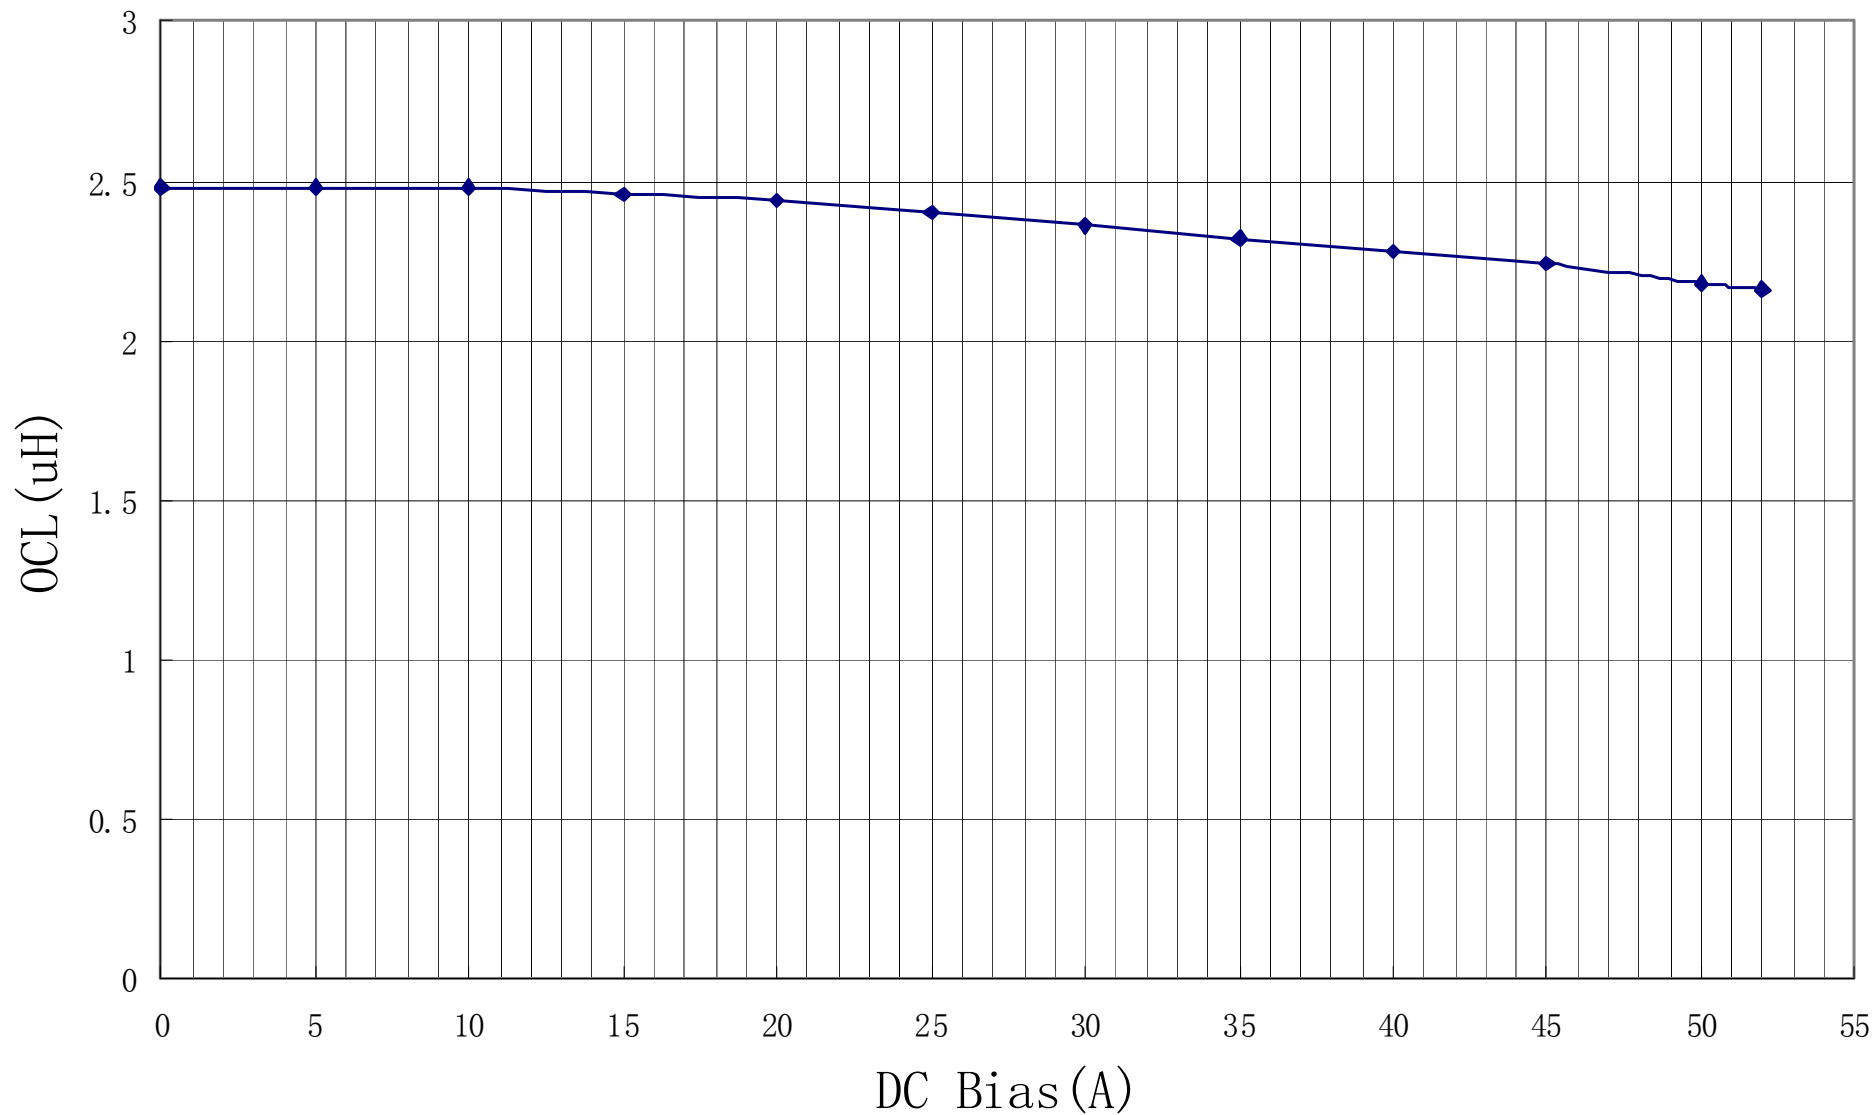

DOC. REV: A/1

XFMRs Inc www.XFMRS.com UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM SHEET 2 OF 2	Title: SMD Flat Wire High Current Inductor	
	P/N: XFHCL32-2R6M	REV. A
	DWN. Yuan	Aug-02-13
	CHK. YK Liao	Aug-02-13
	APP. BW	Aug-02-13

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.