



• Mechanical Specification:

Dimension

- Chip size: 960 x 960 μm
- Thickness: typ. 270 μm

Electrodes / Metallization

- p-side (anode): Au alloy
- n-side (cathode) Au alloy

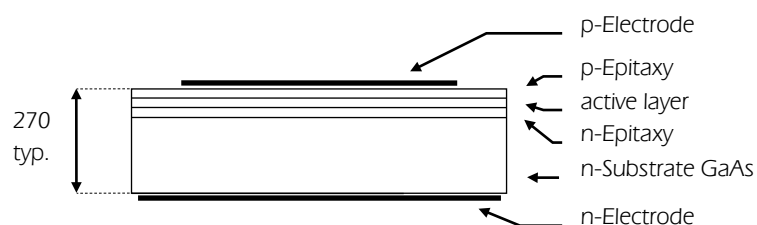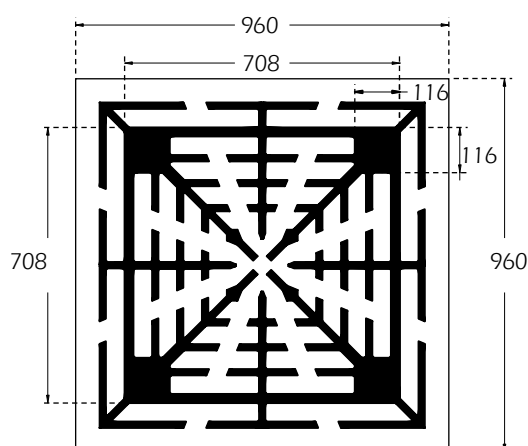

• Electrical and Optical Characteristics (T=25°C):

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_{f1}	$I_f = 100\text{mA}$		1.15	1.25	V
	V_{f2}	$I_f = 350\text{mA}$		1.20	1.40	V
Reverse Current	I_r	$V_r = 5\text{V}$			10	μA
Output Power ⁽¹⁾	Φ_e	$I_f = 50\text{mA}$		3.5		mW
Radiant Intensity ⁽¹⁾	Φ_e	$I_f = 350\text{mA}$		6.5		mW/sr
Switching Time	t_r, t_f	$I_f = 350\text{mA}$		20		ns
FWHM	$\frac{1}{2} \lambda_p$	$I_f = 350\text{mA}$		80		nm
Peak Wavelength	λ_p	$I_f = 350\text{mA}$	1030	1050	1070	nm

NOTE:

(1) Power is measured by OSA on gold plate

High Power / High Speed MQW IR-Chip

15022XL-1050



- **Packing / Labeling:**

Dice on adhesive film with wire bond side on top

OSA Opto Light GmbH
Köpenicker Str. 325 / Haus 201
12555 Berlin - Germany
Phone: +49-(0)30-65762683

RoHS-compliant

Part No. 15022XL-1050

BATCH xxxxxx/xx/x

Date: 2011-01-01

@xx mA	min	typ	max
V _f (V)	x.xx	x.xx	x.xx
Φ _e (mW)	x.xx	x.xx	x.xx
λ _{p/d} (nm)	xxx.x	xxx.x	xxx.x

Q'TY: xxx pcs

- **General Remarks:**

“RoHS-compliant”, fulfill the requirements of RoHS Directive 2002/95/EC
 “REACH- compliant”

We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use OSA Opto Light products for any unintended or unauthorized application, the buyer shall indemnify OSA Opto Light against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

OSA Opto Light products described in this document are not authorized for use as critical components in life support systems without the written consent of the appropriate officer of OSA Opto Light GmbH. Life support systems are either systems intended for surgical implant in the body or systems which sustain life.