



# IEC-2002

## 10/100/1000 Industrial Media Converter, SC MM 2KM, -40 to 75C

### Overview

LevelOne IEC-2002 is an industrial Gigabit Ethernet media converter with a rugged aluminium case which providing superb heat dissipation. This converter is designed to be mounted on an industrial standard DIN-rail, plus the clearly visible status LEDs provide simple monitoring of port link activity. It also features Link Fault Pass Through in order to alert remote location when link status changes.

### Safety

Complies with NEMA (National Manufacturers Association) TS1 & TS2 Environmental certified for the Traffic Control Equipment that withstand extreme temperatures, operating voltage and humidity fluctuation, vibration and shock commonly experienced in severe outdoor environments.

### Fault Detection

Relay contact sends alert signal when the power failed or a port link disconnected, therefore the system operator can respond quickly. This relay contact can be easily configured with a simple DIP switch.

### High Reliability


All components are built to withstand harsh environment applications without compromise where humidity, temperature variation and even shock vibration are concerns, including Electric & Utility, Critical Infrastructure, Transportation and Surveillance Security. This device operates under -40 to 75 Celsius (-40 to 167 Fahrenheit) temperature.

### Features

- Complies with NEMA TS1 & TS2 Environmental requirements for Traffic control equipment
- Complies with IEC61000-6-2 EMC Generic standard immunity for Industrial environment
- 1000Base-SX Multi-mode fiber for the link up to 2 kilometers
- DIP switch configuration for "Link-Fault-Pass-Through," link down alarm, speed, duplex mode
- 1000Mbps-Full-duplex, 10/100Mbps-Full/Half-duplex, Auto-Negotiation, Auto-MDI/MDIX
- Full wire-speed forwarding rate
- Alarms for power and port link failure by relay output
- -40°C to 75°C (-40°F to 167°F) operating temperature range, tested for functional operation @ -40°C to 85°C (-40°F to 185°F)
- IP30 aluminum case
- Supports DIN-rail mounting installation

### Diagrams

Unit: mm

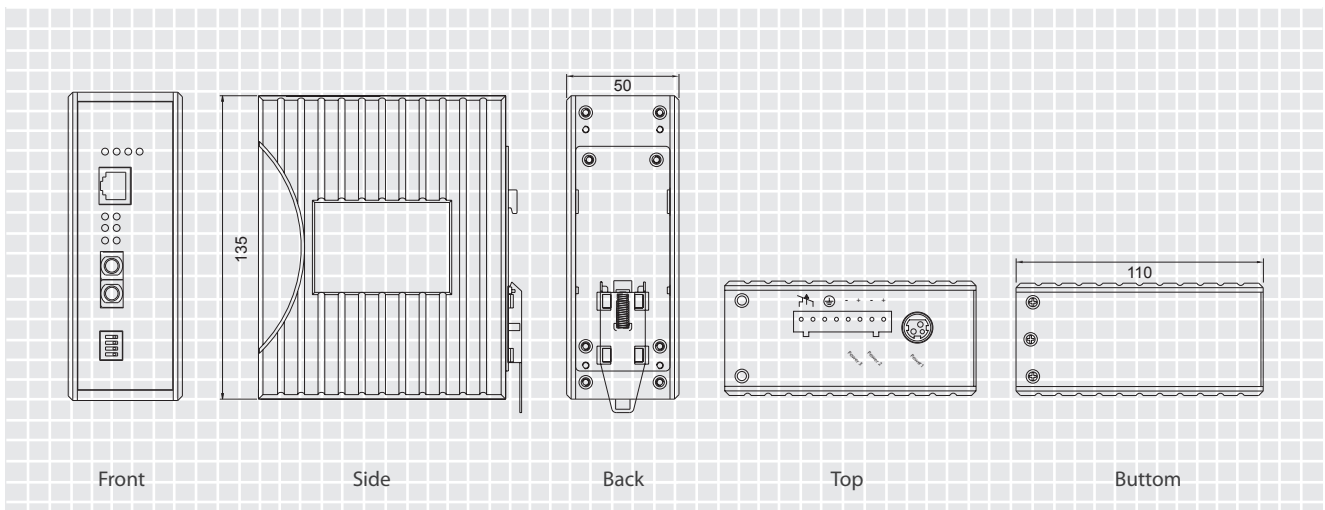

## Specifications

Technology	
Standards	<ul style="list-style-type: none"> <li>IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX, IEEE802.3ab1000BASE-T, IEEE802.3z 1000BASE-SX/1000BASE-LX, IEEE802.3x</li> </ul>
Forward and Filtering Rate	<ul style="list-style-type: none"> <li>1,488,100pps for 1000Mbps</li> </ul>

Power	
Voltage	<ul style="list-style-type: none"> <li>Input: 12 to 48VDC (Terminal Block); 12VDC (DC Jack)</li> </ul>
Power Consumption	<ul style="list-style-type: none"> <li>7.68W, Max., 0.16A @ 48VDC</li> </ul>
Overload Current Protection	<ul style="list-style-type: none"> <li>Present</li> </ul>
Reverse Polarity Protection	<ul style="list-style-type: none"> <li>Present</li> </ul>

Mechanical	
Casing	<ul style="list-style-type: none"> <li>Aluminum case</li> <li>IP30</li> </ul>
Dimensions	<ul style="list-style-type: none"> <li>50mm (W) x 110mm (D) x 135mm (H) (1.97" (W) x 4.33" (D) x 5.31" (H))</li> </ul>
Weight	<ul style="list-style-type: none"> <li>0.8Kg (1.76lbs.)</li> </ul>
Installation	<ul style="list-style-type: none"> <li>DIN-Rail (Top hat type 35mm), Panel, Rack Mounting</li> </ul>

Interface	
Ethernet Port	<ul style="list-style-type: none"> <li>10/100/1000BASE-TX: 1 port</li> <li>Gigabit SFP: 1 port</li> </ul>
LED Indicators	<ul style="list-style-type: none"> <li>Per Unit: Power Status (Power1, Power2, Power3, Fault), LFPT</li> <li>Per Port: 10/100/1000TX: Link/Activity, Speed, Full-duplex/Collision</li> <li>Gigabit SFP: Link/Activity</li> </ul>
Relay Contact	<ul style="list-style-type: none"> <li>Relay contact rating with current 1A @ 30VDC, 0.5A @ 120VAC</li> </ul>

Environment	
Operating Temperature	<ul style="list-style-type: none"> <li>-40°C to 75°C (-40°F to 167°F)</li> <li>Tested @ -40°C to 85°C (-40°F to 185°F)</li> </ul>
Storage Temperature	<ul style="list-style-type: none"> <li>-40°C to 85°C (-40°F to 185°F)</li> </ul>
Ambient Relative Humidity	<ul style="list-style-type: none"> <li>5% to 95% (non-condensing)</li> </ul>
MTBF	<ul style="list-style-type: none"> <li>53.10 years</li> </ul>

Regulatory Approvals	
ISO	<ul style="list-style-type: none"> <li>Manufactured in an ISO9001 facility</li> </ul>
Safety	<ul style="list-style-type: none"> <li>UL508</li> </ul>
EMI	<ul style="list-style-type: none"> <li>FCC Part 15, Class A</li> <li>EN61000-6-3               <ul style="list-style-type: none"> <li>EN55022</li> <li>EN61000-3-2</li> <li>EN61000-3-3</li> </ul> </li> </ul>
EMS	<ul style="list-style-type: none"> <li>EN61000-6-2               <ul style="list-style-type: none"> <li>EN61000-4-2 (ESD Standards) Contact: + / - 4KV Air: + / - 8KV</li> <li>EN61000-4-3 (Radiated RFI Standards) 10V/m, 80 to 2.7GMHz; 80% AM</li> <li>EN61000-4-4 (Burst Standards) Signal Ports: + / - 4KV D.C. Power Ports: + / - 4KV</li> <li>EN61000-4-5 (Surge Standards) Signal Ports: + / - 1KV; Line-to-Line D.C. Power Ports: + / - 0.5KV; Line-to-earth</li> <li>EN61000-4-6 (Induced RFI Standards) Signal Ports: 10Vrms @ 0.15 - 80MHz; 80% AM D.C. Power Ports: 10Vrms @ 0.15 - 80MHz; 80% AM</li> <li>EN61000-4-8 (Magnetic Field Standards) 30A/m @ 50, 60Hz</li> </ul> </li> </ul>
Environmental Test Compliance	<ul style="list-style-type: none"> <li>IEC60068-2-6 Fc (Vibration Resistance) 5g @ 10 - 150Hz, Amplitude 0.35mm (Operation/Storage/Transport)</li> <li>IEC60068-2-27 Ea (Shock) 25g @ 11ms (Half-Sine Shock Pulse; Operation) 50g @ 11ms (Half-Sine Shock Pulse; Storage/Transport)</li> <li>FED STD 101C Method 5007.1 (Free fall w/ package) -Tested with Cross Weight and Drop High standard table</li> </ul>

## Order Information

**IEC-2002-** 10/100/1000 Industrial Media Converter, SC MM 2KM, -40 to 75C

## Package Contents

IEC-2002

Quick Installation Guide