



# KBP4005G THRU KBP410G


## BRIDGE RECTIFIERS

### FEATURES

- UL Recognized File # E469616
- Reliable low cost construction utilizing molded plastic technique
- Ideal for printed circuit board
- Low forward voltage drop
- Low reverse leakage current
- High surge current capability

### MECHANICAL DATA

Case: Molded plastic, KBP  
 Epoxy: UL 94V-O rate flame retardant  
 Terminals: Leads solderable per MIL-STD-202, method 208 guaranteed  
 Mounting position: Any  
 Weight: 0.012ounce, 0.33gram

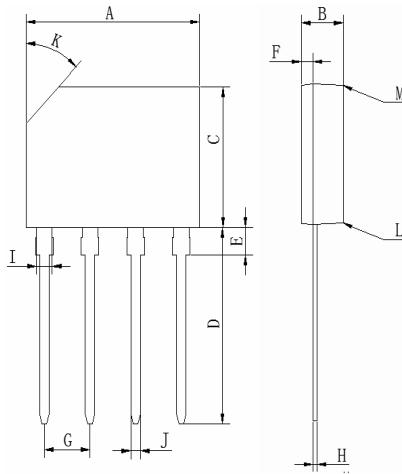

KBP Unit:mm		
DIM	MIN	MAX
A	14.25	14.75
B	3.35	3.65
C	10.2	10.6
D	14.3	14.8
E	1.8	2.2
F	0.8	1.1
G	3.56	4.06
H	0.3	0.55
I	1.22	1.42
J	0.76	0.86
K	2.7X45°(Typ.)	
L	-	3°
M	-	3°

All Dimensions in millimeter

### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	KBP4005G	KBP401G	KBP402G	KBP404G	KBP406G	KBP408G	KBP410G	Units
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at T <sub>A</sub> =50	I <sub>(AV)</sub>					4.0			Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>					100			Amp
Maximum Forward Voltage at 4.0A DC and 25	V <sub>F</sub>				1.1				Volts
Maximum Reverse Current at T <sub>A</sub> =25 at Rated DC Blocking Voltage T <sub>A</sub> =100	I <sub>R</sub>				10.0				uAmp
Typical Junction Capacitance (Note 1)	C <sub>J</sub>				25				pF
Typical Thermal Resistance (Note 2)	R <sub>0JA</sub>				30				/W
Typical Thermal Resistance (Note 2)	R <sub>0JL</sub>				11				/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>Stg</sub>				-55 to +150				

### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance Junction to Ambient and form junction to lead at 0.375"(9.5mm) lead length P.C.B. Mounted.



# KBP4005G THRU KBP410G

## BRIDGE RECTIFIERS

### Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Fig. 1 Forward Current Derating Curve

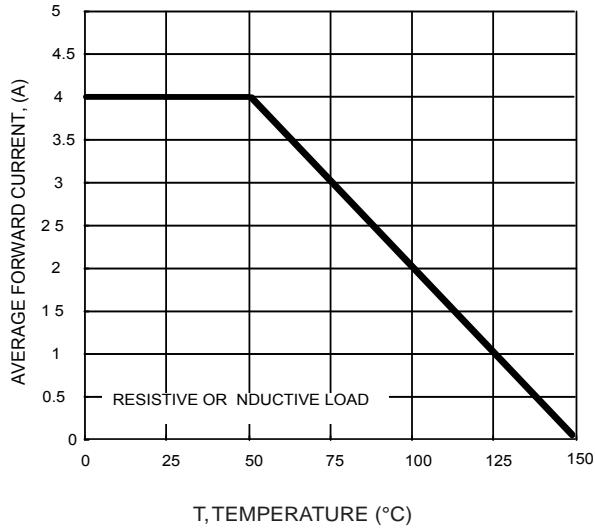


Fig. 2 Typical Fwd Characteristics

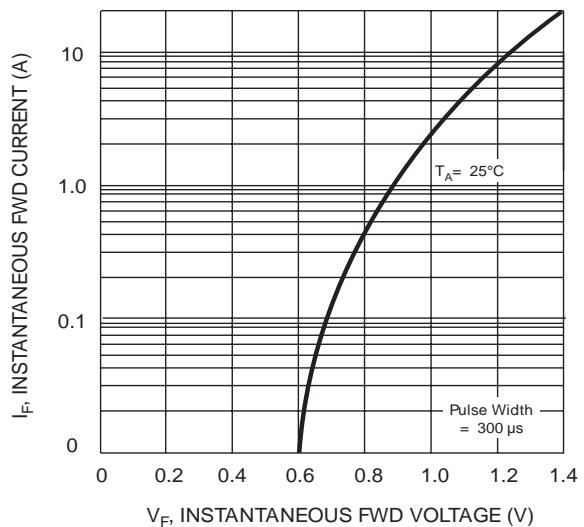


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

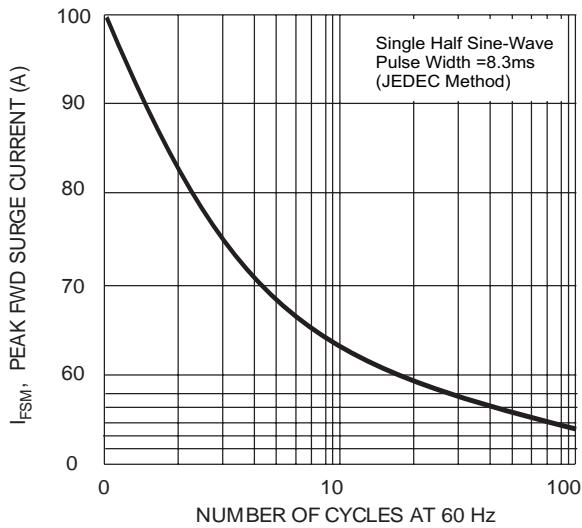


Fig. 4 Typical Junction Capacitance

