

LIGHT EMITTING DIODES 1.6÷4.6 μm


Model LED23-TEC 2.35 mm 0.8 mW

- Light Emitting Diodes **LED23-TEC** are designed for emitting at a spectral range around 2350 nm. Thermocooler and thermoresistor are mounted inside 9 mm package TO-5. Heterostructures (HS) are grown on GaSb substrates
- Light Emitting Diodes **LED23-TEC** are developed for using in optical gas sensors and medical diagnostics. Such construction gives possibility for temperature stabilization of LED parameters. Lifetime is more then 10000 hours.
- Related products: **LED23** can be used in optical pair with our photodiodes **PD24**. Our standard **LED Driver** provides power supply of **LED23-TEC** in two recommended here regimes (Quasi-CW and Pulsed).




Parameters	Min	Typ	Max
Wavelength, μm	2.30	2.35	2.39
FWHM, μm	0.17	0.22	0.27
Optical Power, μW			
Quasi-CW @ 200 mA	0.6	0.8	1.0
Pulsed@2A	12	16	20
Switching Time, ns	10	30	50
Range of temperature control °C	-10÷+60		
Emitting Area, μm	300x300		
Soldering temperature	95 °C		
Package	TO-5 with thermocooler and thermistor		

Recommended regimes of LED operation

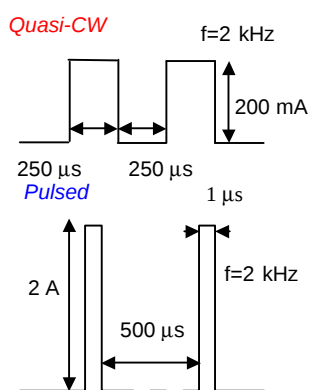

Main thermocooler parameters (without load)

$I_{\max}$ (Amps)	$Q_{\max}$ (Watts)	$U_{\max}$ (Volts)	$\Delta T_{\max}$ °C
0.7	0.4	1.0	67

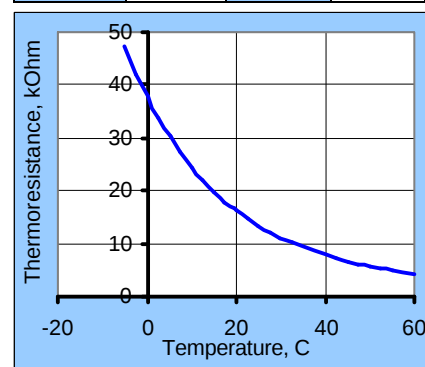

Package TO-5

