

INTELLIGENT INTERACTIVE SYNTHESIZER


SURFACE MOUNT MODEL: LFSFN160250-50

OPTIMIZED BANDWIDTH


1600 - 2500 MHz

FEATURES:

- ▶ Exceptionally Low Phase Noise
- ▶ Interactive Communication
- ▶ Standard Programming Interface
- ▶ Ultra Wide Tuning Range
- ▶ Lead Free - RoHS Compliant
- ▶ Patented REL-PRO® Technology
- ▶ Small Size, Surface Mount
- ▶ Buffered Output



Phase Noise

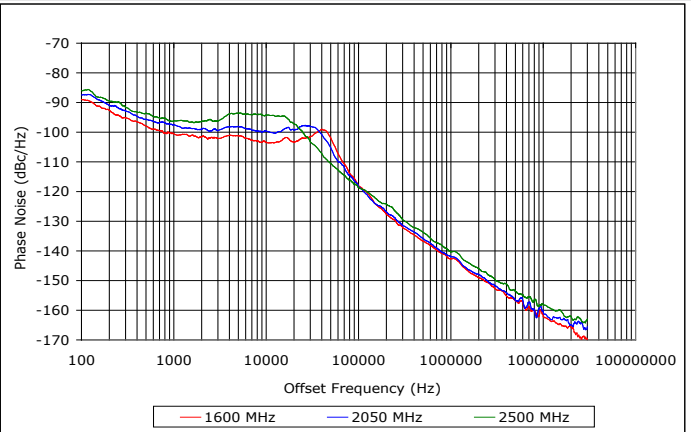

SPECIFICATIONS (Rev. C 01/25/13)

Frequency	1600 - 2500 MHz		
Step Size	500 kHz		
Reference Input Frequency	10 MHz		
Reference Input Voltage	1 V p-p to 3.3 V p-p		
Bias Voltage	Vcc	V (Vdc)	I (mA Max.)
	Digital	+5	45
	VCO	+8	35
	Converter	+8	35
Output Power	+5 dBm (Min.)		
Spurious Suppression	70 dB (Typ.)		
Harmonic Suppression	20 dB (Typ.)		
Settling Time	2 mSec (Typ.) ¹		
Output Impedance	50 Ohms (Nom.)		
Lock Detect Indicator	CMOS 3.3 V		
Typical Phase Noise	Offset	Phase Noise	
	@ 1 kHz	-100 dbc/Hz	
	@ 10 kHz	-100 dbc/Hz	
	@ 100 kHz	-117 dbc/Hz	
Operating Temperature Range	-40 to +85 °C		
Programming	See application note AN7100 for changing factory setting to desired reference frequency.		


¹ From the rising edge of LE to stable lock detect

Absolute Maximum Ratings

Storage Temp. Range	-55 to +125 °C
Bias Voltage (Digital)	+5.25 V
Bias Voltage (VCO)	+8.5 V
Bias Voltage (Converter)	+10 V
DC Voltage Applied to RF Out	±25 V

Patent : <http://www.synergymwave.com/patents>

Package # 197LF

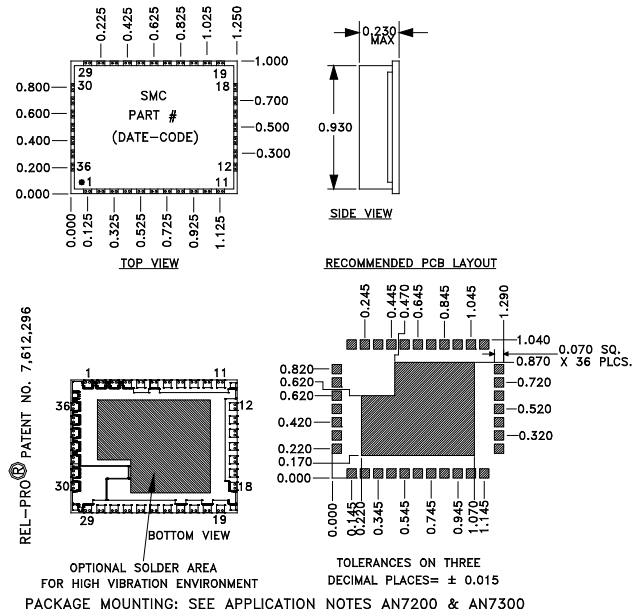

Port Configuration

Pin 5 - RF out	Pin 21 - Ref. In	Pin 8,12,14,15,17 - NC
Pin 7 - Lock Detect Out *	Pin 23 - Vcc (Digital)	All Others - Ground
Pin 9 - Data In	Pin 24 - Vtune (Output)	
Pin 10 - Error Flag	Pin 25 - Vcc (VCO)	
Pin 11 - Clock In	Pin 26 - Vout (Converter) ***	NC - No Connection
Pin 13 - VCO (On/Off)****	Pin 27 - Vcc (Tune) ***	
Pin 19 - Latch Enable In	Pin 28 - Vcc (Converter)	

* High when locked (source/sink 500 uA)
 *** Connect externally. Bypassed with a 10uF 35V tantalum capacitor.
 **** NC if unused.


INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSFN160250-50


OPTIMIZED BANDWIDTH

1600 - 2500 MHz

HARMONIC SUPPRESSION

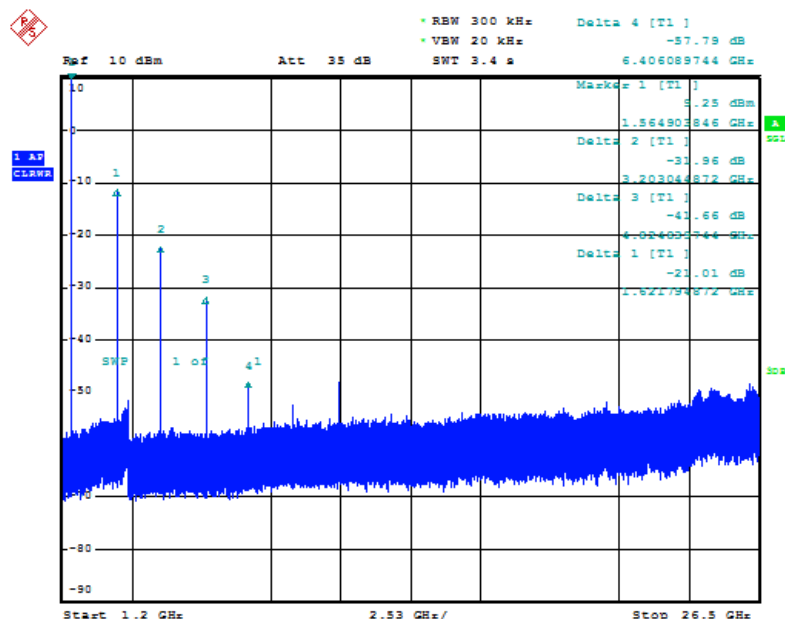

REFERENCE SIDEBAND SUPPRESSION

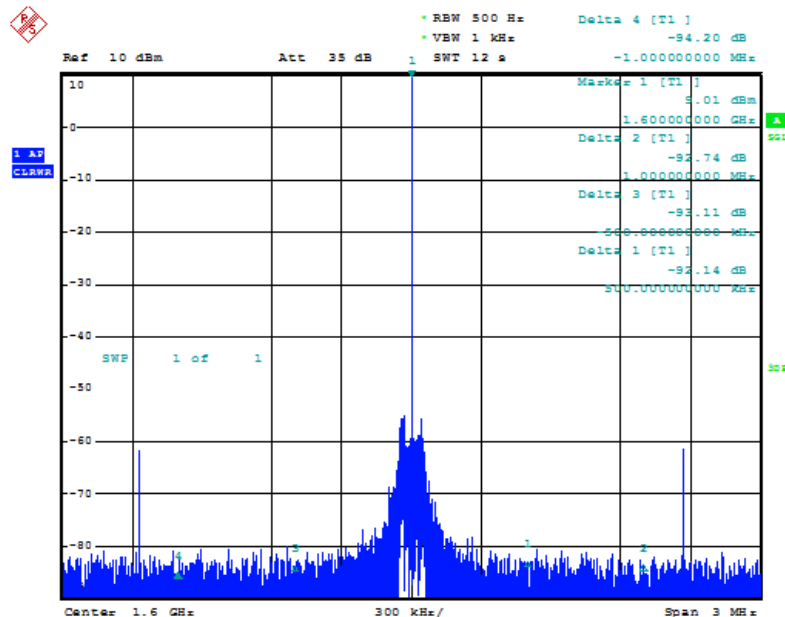

PERFORMANCE PLOTS


INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSFN160250-50

OPTIMIZED BANDWIDTH

1600 - 2500 MHz

REFERENCE SIDEBAND SUPPRESSION

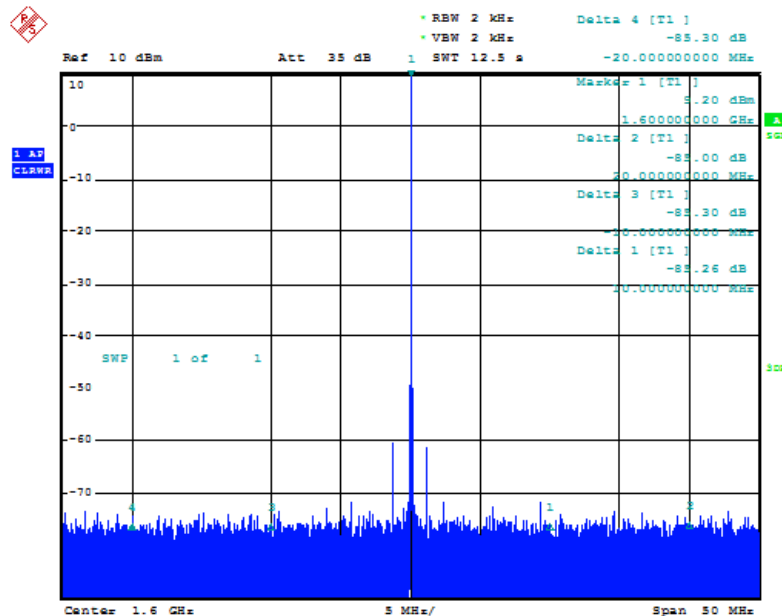

PERFORMANCE PLOTS


INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSFN160250-50


OPTIMIZED BANDWIDTH

1600 - 2500 MHz

HARMONIC SUPPRESSION

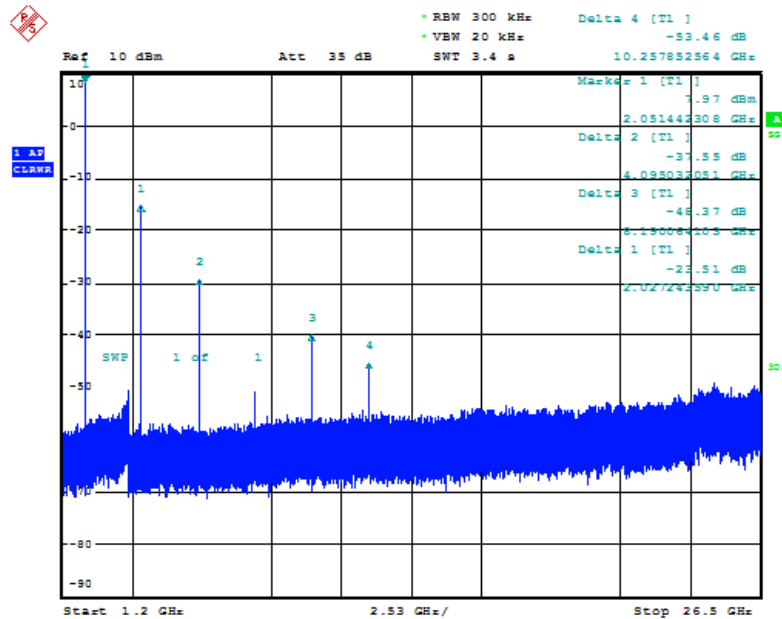

REFERENCE SIDEBAND SUPPRESSION

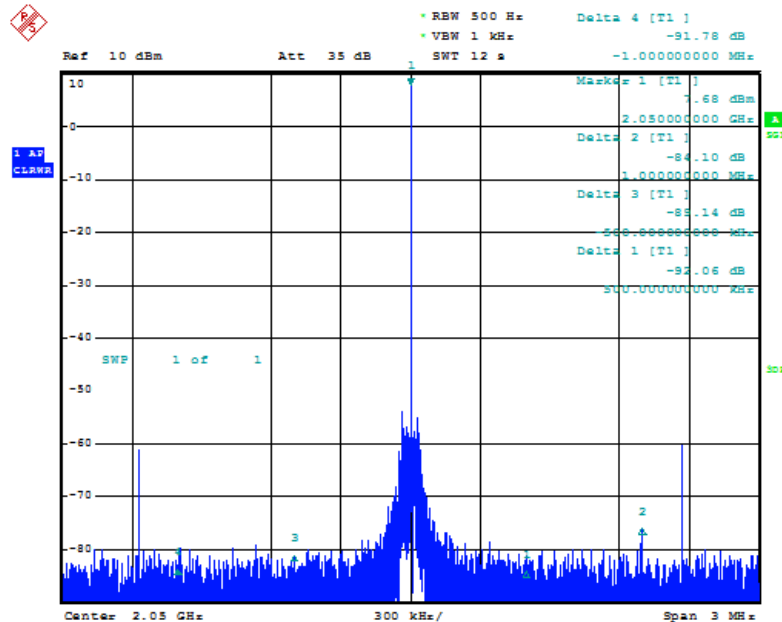

PERFORMANCE PLOTS


INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSFN160250-50

OPTIMIZED BANDWIDTH

1600 - 2500 MHz

REFERENCE SIDEBAND SUPPRESSION

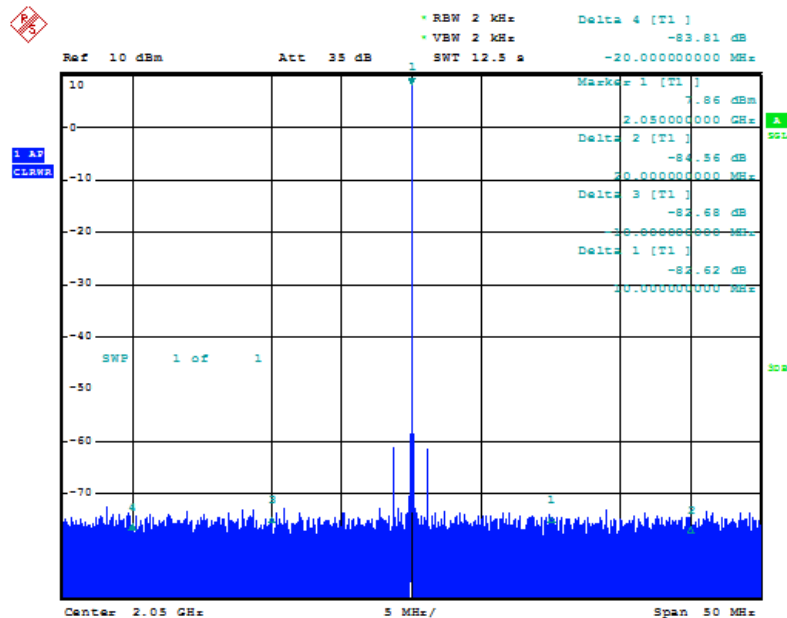

PERFORMANCE PLOTS

INTELLIGENT INTERACTIVE SYNTHESIZER


SURFACE MOUNT MODEL: LFSFN160250-50

OPTIMIZED BANDWIDTH


1600 - 2500 MHz

PERFORMANCE PLOTS

HARMONIC SUPPRESSION

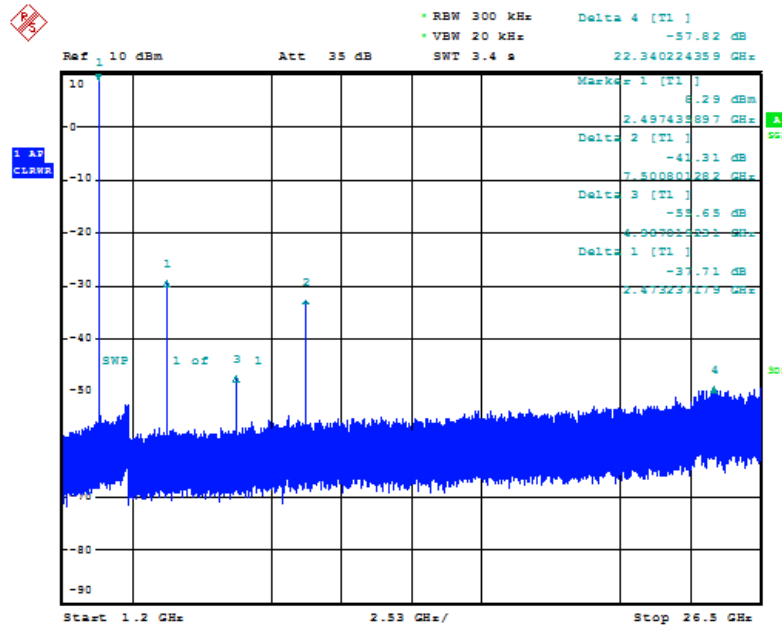

REFERENCE SIDEBAND SUPPRESSION

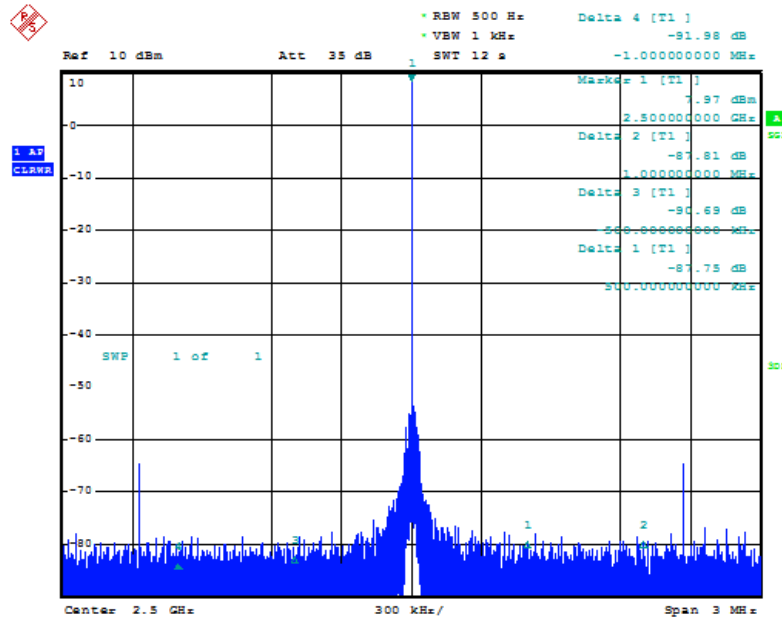

Copyright © Synergy Microwave Corporation

201 McLean Boulevard • Paterson, New Jersey 07504 USA

Tel: (973) 881-8800 • Fax: (973) 881-8361

E-Mail: sales@synergymwave.com • Website: <http://www.synergymwave.com>




INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSFN160250-50

OPTIMIZED BANDWIDTH

1600 - 2500 MHz

REFERENCE SIDEBAND SUPPRESSION

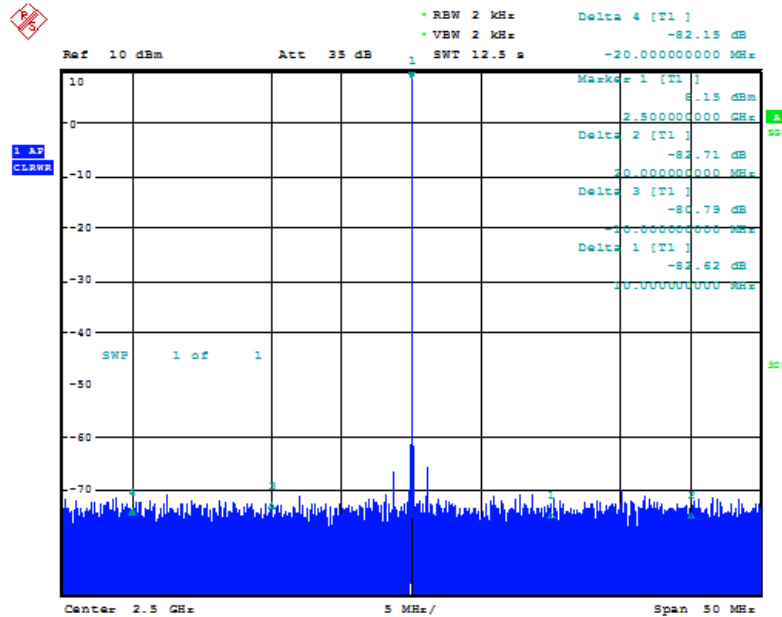

PERFORMANCE PLOTS