

Resettable Fuse PTC

Features


- Radial leaded devices.
- Over-current protection
- High voltage surge capabilities
- Flame retardant epoxy polymer insulating material meets UL94 V-0 requirement.
- Available in lead-free version.
- Meets MSL level 1, per J-STD-020



JK-nSMD005 Picture

Dimensions(3216mm / 1206 mils) Unit: mm

Fast Delivery Time

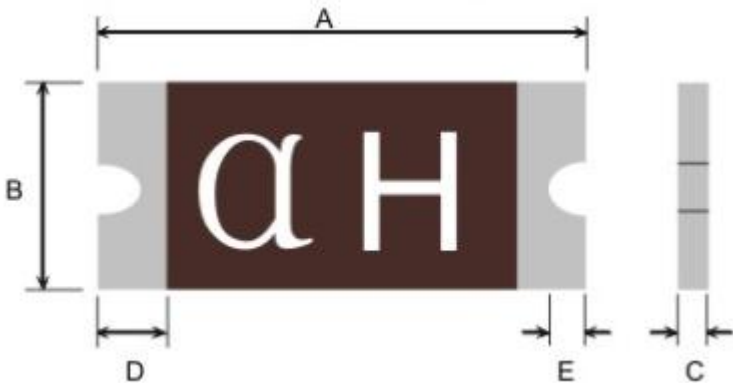

Model	A		B		C		D	E(max)
	Min	max	Min	Max	Min	Max	Min	Min
JK-nSMD005	3.00	3.50	1.50	1.80	0.60	1.10	0.15	0.10
JK-nSMD010	3.00	3.50	1.50	1.80	0.60	1.10	0.15	0.10
JK-nSMD020	3.00	3.50	1.50	1.80	0.40	0.90	0.15	0.10
JK-nSMD025	3.00	3.50	1.50	1.80	0.40	0.90	0.15	0.10
JK-nSMD035	3.00	3.50	1.50	1.80	0.40	0.90	0.15	0.10
JK-nSMD050	3.00	3.50	1.50	1.80	0.40	0.90	0.15	0.10
JK-nSMD075	3.00	3.50	1.50	1.80	0.35	0.85	0.15	0.10
JK-nSMD100	3.00	3.50	1.50	1.80	0.40	1.20	0.15	0.10
JK-nSMD150	3.00	3.50	1.50	1.80	0.75	1.80	0.15	0.10
JK-nSMD200	3.00	3.50	1.50	1.80	0.50	1.80	0.15	0.10

Electrical characteristics(25°C)

Part Number	I _h (A)	I _t (A)	V _{max} (V)	I _{max} (A)	P _d (W)	Trip Current(A)	Trip Time(S)	R _{min} (Ω)	R _{1max} (Ω)
JK-nSMD005	0.05	0.15	60.0	100	0.4	0.3	1.50	3.600	50.000
JK-nSMD010	0.10	0.25	60.0	100	0.4	0.5	1.00	1.600	15.000
JK-nSMD020	0.20	0.46	16.0	100	0.6	8.0	0.08	0.350	15.000
JK-nSMD025	0.25	0.50	16.0	100	0.6	8.0	0.08	0.350	2.500
JK-nSMD035	0.35	0.75	6.0	100	0.6	8.0	0.10	0.250	1.300
JK-nSMD050	0.50	1.00	6.0	100	0.6	8.0	0.10	0.150	0.700
JK-nSMD050-13.2V	0.50	1.00	6.0	100	0.6	8.0	0.10	0.150	0.700
JK-nSMD075	0.75	1.50	6.0	100	0.6	8.0	0.20	0.090	0.500
JK-nSMD100	1.00	1.80	6.0	100	0.6	8.0	0.30	0.055	0.270
JK-nSMD150	1.50	3.00	6.0	100	0.8	8.0	1.00	0.040	0.130
JK-nSMD200	2.00	3.50	6.0	100	0.8	8.0	1.50	0.018	0.08

- I_H = Hold current: maximum current device will pass without tripping in 25°C still air.
- I_T = Trip current: minimum current at which the device will trip in 25°C still air.
- V_{MAXI} = Maximum interrupt voltage device can withstand without damage at rated current.
- I_{MAX} = Maximum fault current device can withstand without damage at rated voltage.
- R_{MAX} = Maximum resistance of device in initial (un-soldered) state.
- R_{MIN} = Minimum resistance of device in initial (un-soldered) state.

Operating temperature: -40°C ~+85°C

Packing quantity: 005,010,100,150,200, 3500PCS/Reel

Packing quantity: 020,025,035,050,075, 5000PCS/Reel



Specifications are subject to change without notice

sales@huaandz.com