
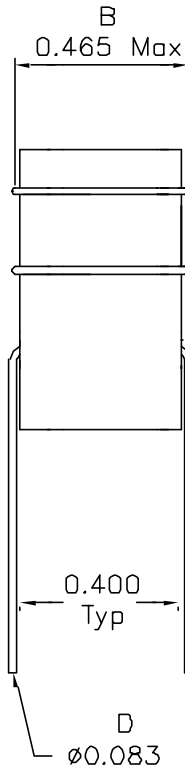



1. Mechanical Dimensions:

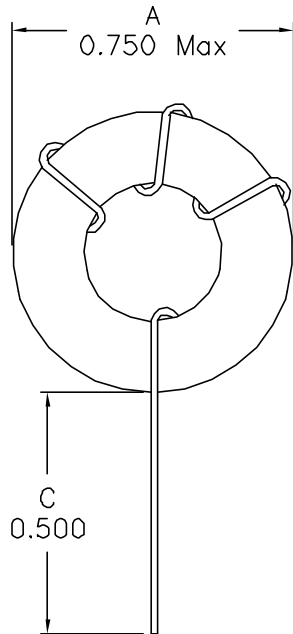

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Moisture Sensitivity: Level 2
10. Electrical and mechanical specifications 100% tested
11. RoHS Compliant Component

2. Schematic:



Core: T60-18 or equal

3. Electrical Specifications: @25°C

OCL: 0.80uH Typ @10KHz 0.1V, 40Adc

DC Resistance: 0.001 Ohms Max

DOC REV: A/1

XFMRs Inc www.XFMRs.com	Title: TOROIDAL INDUCTOR		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0154-VO18	REV. A
TOLERANCES: .xxx ±0.010	DWN.	刘鹏	Oct-15-04
Dimensions in INCH	CHK.	李小锋	Oct-15-04
SHEET 1 OF 1	APP.	BW	Oct-15-04