


Elastische Einpresszone mit Übergabesteckzone / compliant pressfit zone with mating transfer zone  
 Isolierwerkstoff / housing material : PBT GF30  
 Bauart 7 / type 7

Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles  
 Fehlende Masse und Angaben gemäß IEC 60 603-2 / DIN EN 60 603-2  
 Missing information and dimensions according to IEC 60 603-2 / DIN EN 60 603-2


Schichtaufbau im metallisierten Loch siehe Zeichnung 164062/Nr.6  
 diameter of drilled hole see drawing 164062/No.6



- 1)  $\phi 1,0 \pm 0,09$  Durchmesser des metallisierten Loches  
 $\phi 1,0 \pm 0,06$  Diameter of finished plated-through hole
- $\phi 1,15 \pm 0,025$  Bohrungsdurchmesser des Loches  
 $\phi 1,15 \pm 0,025$  Diameter of drilled hole

Bestückungsplan / contact layout

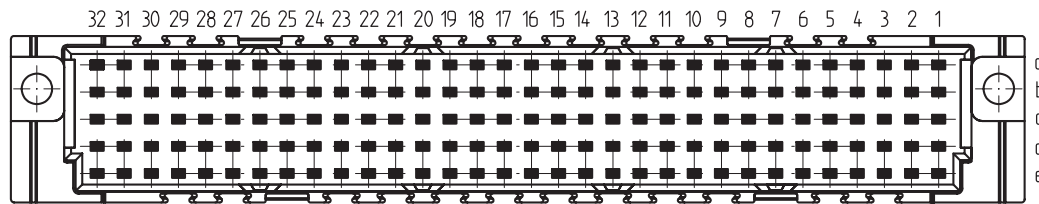

Leiterplatten-Lochbild / PCB drillhole pattern

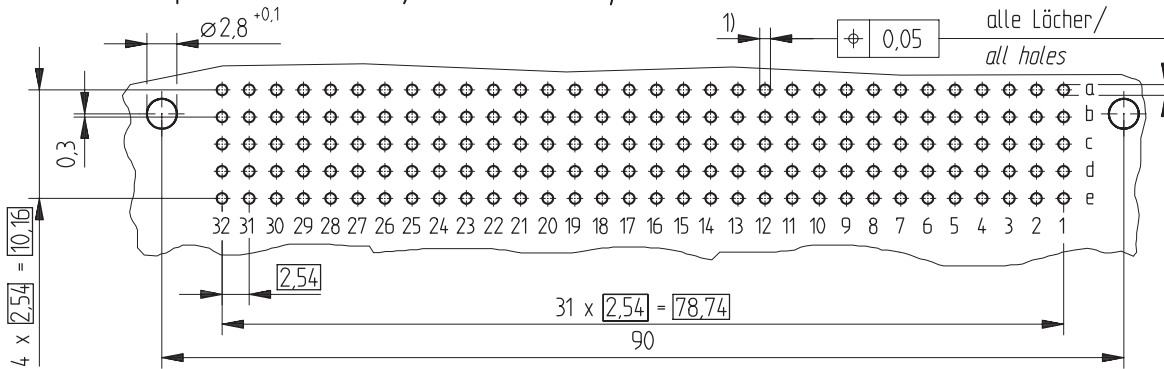

Information: All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances  All Dimensions in mm	Scale 2:1
	Subject to modification without prior notice. Drawing will not be updated.	Designation Federleiste E 160 EE Fem. Connector E 160 Pressfit
 www.ERNI.com	284185	I
Index	Date	H:00062255.SZA STVE

Consider protection memo from DIN 34