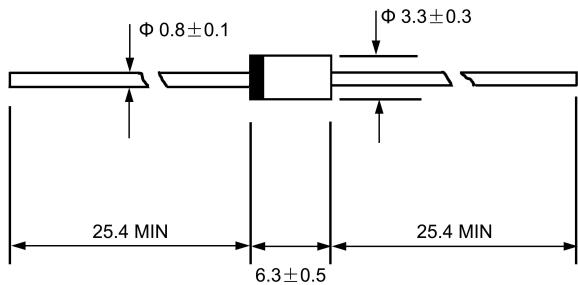


FAST RECOVERY RECTIFIERS
**VOLTAGE RANGE: 200 --- 600 V
CURRENT: 1.5 A**
FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents

MECHANICAL DATA

- ◇ Case: JEDEC DO-15, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.014 ounces, 0.39 grams
- ◇ Mounting position: Any

DO - 15


Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 50Hz, resistive or inductive load. For capacitive load, derate by 20%.


| | | BYV95A | BYV95B | BYV95C | UNITS |
|--|-----------------|----------------|--------|--------|--------------------|
| Maximum recurrent peak reverse voltage | V_{RRM} | 200 | 400 | 600 | V |
| Maximum RMS voltage | V_{RMS} | 140 | 280 | 420 | V |
| Maximum DC blocking voltage | V_{DC} | 200 | 200 | 600 | V |
| Maximum average forward rectified current 9.5mm lead length, $\text{@ } T_A = 75^\circ\text{C}$ | $I_{F(AV)}$ | 1.5 | | | A |
| Peak forward surge current 10ms single half-sine-wave superimposed on rated load $\text{@ } T_J = 125^\circ\text{C}$ | I_{FSM} | 50.0 | | | A |
| Maximum instantaneous forward voltage $\text{@ } 3.0\text{A}$ | V_F | 1.6 | | | V |
| Maximum reverse current $\text{@ } T_A = 25^\circ\text{C}$ at rated DC blocking voltage $\text{@ } T_A = 100^\circ\text{C}$ | I_R | 5.0 100.0 | | | μA |
| Maximum reverse recovery time (Note1) | t_{rr} | 250 | | | ns |
| Typical junction capacitance (Note2) | C_J | 18 | | | pF |
| Typical thermal resistance (Note3) | $R_{\theta JA}$ | 45 | | | $^\circ\text{C/W}$ |
| Operating junction temperature range | T_J | -55 ---- + 150 | | | $^\circ\text{C}$ |
| Storage temperature range | T_{STG} | -55 ---- + 150 | | | $^\circ\text{C}$ |

 NOTE:1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.


2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

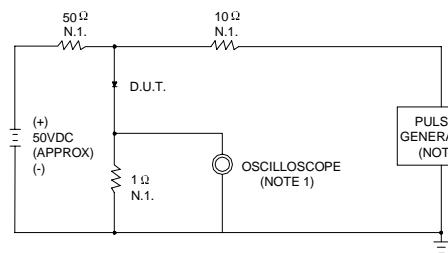


NOTES:
1. RISE TIME = 7ns MAX. INPUT IMPEDANCE = 1M Ω . 22pF
2. RISE TIME = 10ns MAX. SOURCE IMPEDANCE = 50 Ω

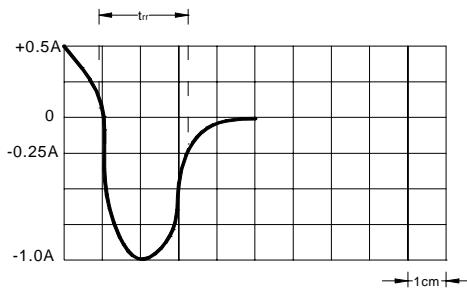

SET TIME BASE FOR 50/100 ns /cm


FIG.2 – FORWARD DERATING CURVE

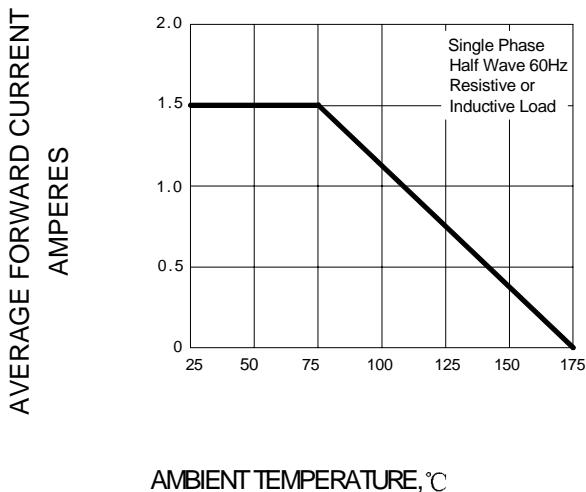

AMBIENT TEMPERATURE, °C


AVERAGE FORWARD CURRENT
AMPERES

FIG.3 – PEAK FORWARD SURGE CURRENT

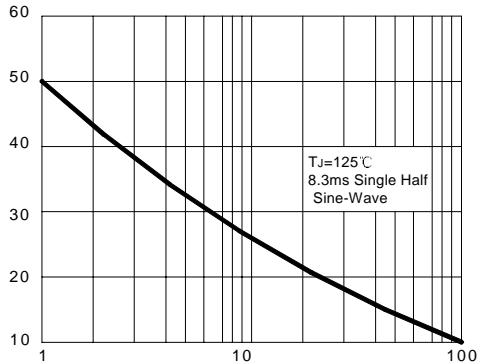

NUMBER OF CYCLES AT 60 Hz


FIG.4-TYPICAL FORWARD CHARACTERISTIC

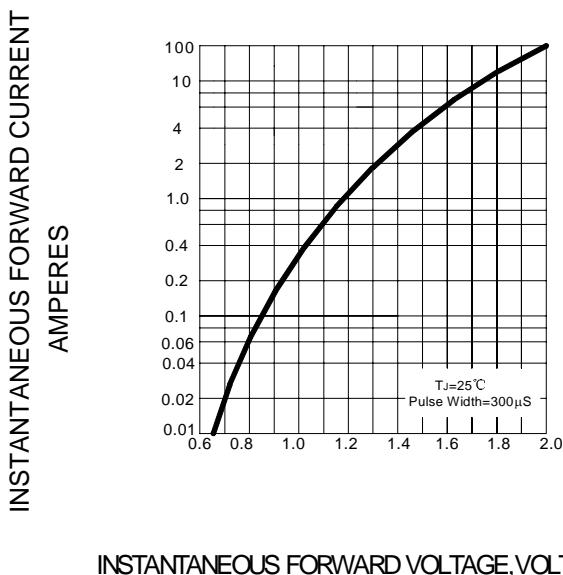

INSTANTANEOUS FORWARD VOLTAGE, VOLTS

INSTANTANEOUS FORWARD CURRENT
AMPERES

FIG.5- TYPICAL JUNCTION CAPACITANCE

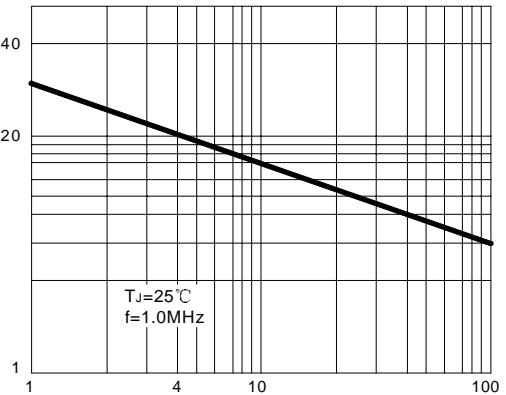

REVERSE VOLTAGE, VOLTS