

Kingtronics®

GKT-VT

Aluminum Electrolytic Capacitor—SMD

FEATURES



- ◆ Chip type, operating with wide temperature range -40~+105°C.
- ◆ Load Life of 1,000~2,000 hours
- ◆ Emboss carrier tape packing system is available for automatic insertion.
- ◆ Designed for surface mounting on high density circuit board.



SPECIFICATIONS

OPERATING TEMPERATURE		-40°C ~ +105°C									
Voltage Range		4V ~ 100V.DC									
Capacitance Range		0.1 ~ 10000μF									
Capacitance Tolerance		± 20% at 120Hz, 20°C									
Leakage Current		Leakage current ($\Phi 4 \sim \Phi 10$) $\leq 0.01CV$ or $3\mu A$, whichever is greater. (After 2 minutes application of rated voltage) Leakage current ($\Phi 12.5 \sim \Phi 16$) $\leq 0.03CV$ or $4\mu A$, whichever is greater. (After 1 minutes application of rated voltage)									
Dissipation Factor (Tan δ)		Measurement Frequency: 120Hz, Temperature: 20°C									
		Rated Voltage (V)	4	6.3	10	16	25	35	50	63	100
Stability At Low Temp.		Tan δ	$\Phi 4 \sim \Phi 10$	0.35	0.30	0.24	0.20	0.16	0.14	0.14	0.12
		(Max.)	$\Phi 12.5 \sim \Phi 16$	0.42	0.38	0.34	0.30	0.26	0.22	0.18	0.14
		Measurement Frequency: 120Hz									
		Impedance Ratio	$\Phi 4 \sim \Phi 10$	Z(-25°C) / Z(20°C)	7	4	3	2	2	2	3
		ZT/Z20 (Max.)	$\Phi 12.5 \sim \Phi 16$	Z(-40°C) / Z(20°C)	15	8	6	4	4	3	4
Load Life		Z(-25°C) / Z(20°C)	7	5	4	3	2	2	2	2	2
		Z(-40°C) / Z(20°C)	17	12	10	8	5	4	3	3	3
		After 2000 hours (1000hrs. for $\Phi 4 \sim \Phi 6.3 \times 5.8$) application of rated voltage at 105°C, They meet the characteristics listed below.									
		Capacitance Change	within ± 20% of initial value for capacitors of 10V or more (within ± 30% of initial value for capacitors of 4V & 6.3V)								
		Dissipation Factor	200% or less of initial specified value								
Shelf Life		Leakage Current	Initial specified value or less								
		After leaving capacitors under no load at 105°C for 1000 hours, They meet the specified value for load life characteristics listed above.									
Resistance to Soldering Heat		After reflow soldering and restored at room temperature, they meet the characteristics listed below.									
		Capacitance Change	Within ± 10% of initial value								
		Dissipation Factor	Initial specified value or less								
		Leakage Current	Initial specified value or less								

DRAWING (Unit: mm)

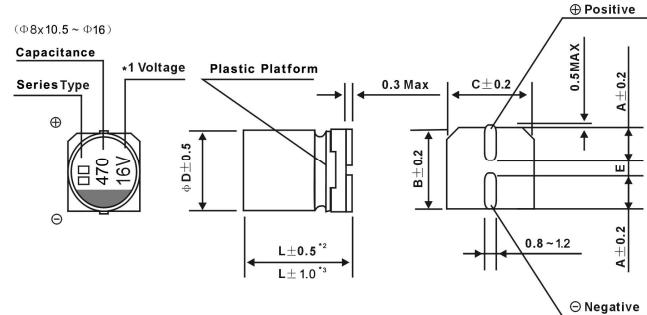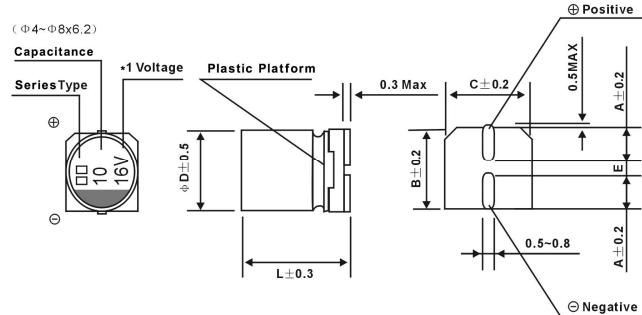

*1 Voltage mark for 6.3V is [6V] *2 Applicable to $\Phi 8 \times 10.5 \sim \Phi 16$ *3 Applicable to $\Phi 12.5 \sim \Phi 16$

(mm)

fDxL	4x5.4	5x5.4	6.3x5.4	6.3x7.7	8x6.2	8x10.5	10x10.5	10x13.5	12.5x13.5	12.5x16	16x16.5	16x21.5
A	1.8	2.1	2.4	2.4	3.3	2.9	3.2	3.2	4.7	4.7	5.5	5.5
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	13.0	13.0	17.0	17.0
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	13.0	13.0	17.0	17.0
E±0.2	1.0	1.3	2.2	2.2	2.2	3.1	4.4	4.4	4.4	4.4	6.7	6.7
L	5.4	5.4	5.4	7.7	6.2	10.5	10.5	13.5	13.5	16.0	16.5	21.5





FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT

Coefficient	Frequency Φ4~Φ10	0.1~68μF	0.70	1.00	1.17	1.36	1.50
		100~3300μF	0.85	1.00	1.08	1.20	1.30
	Φ12.5~Φ16	~68μF	0.75	1.00	1.35	1.57	2.00
		100~680μF	0.8	1.00	1.23	1.34	1.50
		1000~10000μF	0.85	1.00	1.10	1.13	1.15

STANDARD RATINGS

Cap/μF	WV/V	4		6.3		10		16		25		35		50	
		0G	0J	1A	1C	1E	1V	1H	1H	1H	1H	1H	1H	1H	1H
0.1	0R1	--	--	--	--	--	--	--	--	--	--	--	--	4x5.4	0.7
0.22	R22	--	--	--	--	--	--	--	--	--	--	--	--	4x5.4	1.6
0.33	R33	--	--	--	--	--	--	--	--	--	--	--	--	4x5.4	2.5
0.47	R47	--	--	--	--	--	--	--	--	--	--	--	--	4x5.4	3.5
1	010	--	--	--	--	--	--	--	--	--	--	--	--	4x5.4	7
2.2	2R2	--	--	--	--	--	--	--	--	--	--	--	--	4x5.4	11
3.3	3R3	--	--	--	--	--	--	--	--	--	--	--	--	4x5.4	13
4.7	4R7	--	--	--	--	--	--	--	--	--	--	--	--	5x5.4 (4x5.4)	16 (13)
10	100	--	--	--	--	--	4x5.4	18	5x5.4 (4x5.4)	20 (14)	5x5.4 (4x5.4)	21 (14)	6.3x5.4	24	
22	220	--	--	4x5.4	22	5x5.4 (4x5.4)	25 (20)	5x5.4 (4x5.4)	27 (20)	6.3x5.4 (5x5.4)	36 (25)	6.3x5.4	38	6.3x7.7 (6.3x5.4) (8 x 6.2)	51 (42) (70)
33	330	5x5.4 (4x5.4)	30 (18)	5x5.4 (4x5.4)	27 (22)	5x5.4 (4x5.4)	30 (22)	6.3x5.4 (5x5.4)	40 (28)	6.3x5.4 (5x5.4)	44 (29)	6.3x5.4 (8 x 6.2)	42 (84)	6.3x7.7	60
47	470	5x5.4 (4x5.4)	36 (24)	5x5.4 (4x5.4)	33 (25)	6.3x5.4 (5x5.4)	41 (30)	6.3x5.4 (5x5.4)	48 (31)	6.3x5.4 (8 x 6.2)	48 (91)	6.3x7.7 (6.3x5.8)	70 (50)	8x10.5 (6.3x7.7)	120 (63)
100	101	6.3x5.4 (5x5.4)	60 (43)	6.3x5.4 (5x5.4)	50 (39)	6.3x5.4 (8x6.2)	53 (110)	6.3x5.4 (8 x 6.2)	60 (120)	6.3x7.7 (8 x 6.2)	91 (120)	8x10.5 (6.3x7.7)	120 (84)	10x10.5 (8x10.5)	170 (140)
150	151	6.3x5.4	52	6.3x5.4	55	6.3x5.4	62	6.3x7.7	95	8x10.5 (6.3x7.7)	140 (100)	8x10.5	155	10x10.5	170
220	221	6.3x5.4	57	6.3x7.7 (6.3x5.8)	105 (67)	6.3x5.8 (6.3x7.7)	67 (105)	8x10.5 (8x6.2)	150 (105)	8x10.5 (8x6.2)	175 (85)	10x10.5 (8x10.5)	220 (190)	10 x 13.5 (10x10.5)	280 (220)
330	331	6.3x7.7	100	6.3x7.7	105	8x10.5	196	8x10.5	195	10x10.5 (8x10.5)	240 (220)	10x10.5	245	16x16.5 (12.5x13.5) (10x13.5)	600 (420) (295)
470	471	6.3x7.7	105	8x10.5 (6.3x7.7)	210 (120)	10x10.5 (8x10.5)	260 (210)	10x10.5 (8x10.5)	295 (230)	10x10.5 (10x10.5)	280	12.5x13.5 (10x13.5) (10x10.5)	520 (375) (280)	16x16.5 (12.5x16)	700 (520)
680	681	8x10.5	210	8x10.5	210	10x10.5	270	10x10.5	315	10 x 13.5	400	12.5x13.5 (10x13.5)	530 (395)	16x16.5	750
1000	102	8x10.5	230	10x10.5 (8x10.5)	300 (230)	10x10.5	315	12.5x13.5 (10x13.5) (10x10.5)	500 (390) (340)	12.5x13.5	580	16x16.5 (12.5x16)	750 (600)	16x21.5	1000
1500	152	10x10.5	315	10 x 13.5 (10x10.5)	450 (315)	10x13.5	460	12.5x13.5	550	12.5x16	850	--	--	--	--
2200	222	10 x 13.5 (10x10.5)	440 (340)	12.5x13.5 (10x13.5)	620 (500)	12.5x13.5	680	16x16.5 (12.5x16)	950 (750)	16x16.5 (16x21.5)	1050 (1250)	16x21.5	1300	--	--
3300	332	10 x 13.5	490	12.5x16 (12.5x13.5)	700 (660)	16x16.5	1000	16x16.5 (16x21.5)	1000 (1200)	16x21.5	1400	--	--	--	--
4700	472	12.5x13.5	600	16x16.5 (16x21.5)	1000 (1200)	16x21.5	1300	16x21.5	1350	--	--	--	--	--	--
6800	682	16x16.5 (12.5x16)	950 (650)	16x21.5	1250	--	--	--	--	--	--	--	--	--	--
10000	103	16x21.5	250	--	--	--	--	--	--	--	--	--	--	--	--

Kingtronics® International Company



GKT-VT

Aluminum Electrolytic Capacitor—SMD

STANDARD RATINGS

Cap/µF	WV/V	63		100	
		1J	2A		
0.1	0R1	4x5.4	0.7	--	--
0.22	R22	4x5.4	1.6	--	--
0.33	R33	4x5.4	2.5	--	--
0.47	R47	4x5.4	3.5	--	--
1	010	4x5.4	7	4x5.4	7
2.2	2R2	4x5.4	11	6.3x5.4	14
3.3	3R3	5x5.4	13	6.3x7.7 (6.3x5.4) (8x6.2)	32 (20) (30)
4.7	4R7	5x5.4	16	6.3x7.7 (6.3x5.4)	35 (21)
10	100	6.3x7.7 (6.3x5.4) (8 x 6.2)	39 (24) (25)	8x10.5 (6.3x7.7)	77 (35)
22	220	8x10.5 (6.3x7.7)	98 (49)	10x10.5 (8x10.5)	126 (84)

Cap/µF	WV/V	63		100	
		1J	2A		
33	330	8x10.5	112	10x10.5	133
47	470	10x10.5 (8x10.5)	160 (119)	12.5x13.5 (10x13.5) (10x10.5)	250 (160) (140)
68	680	--	--	12.5x13.5 (10x13.5)	300 (180)
100	101	12.5x13.5 (10.5x13.5) (10x10.5)	270 (210) (196)	16x16.5 (12.5x13.5)	450 (380)
150	151	10 x 13.5	225		
220	221	16x16.5 (12.5x13.5) (10x13.5)	560 (470) (235)	16x16.5 16x21.5	550 750
330	331	16x16.5 (12.5x16)	700 (510)	16x21.6	800
470	471	16x16.5 16x21.5	750 900		
680	681	16x21.5	950		
				Case size	Allowable ripple

HOW TO ORDER

GKT	VT	0J	M	220	040054	T	R
Series	Sub Series	Voltage	Capacitance Tolerance	Capacitance	Case Size	Packing	Pb
1.	2.	3.	4.	5.	6.		

NOTE:

1. Rated Voltage

Code	0G	0J	1A	1C	1E	1V	1H	1J	2A
Voltage	4	6.3	10	16	25	35	50	63	100

2. Capacitance Tolerance

Code	K	M	Q	T
Tolerance	±10%	±20%	+30-10%	+50-10%

3. Capacitance

Code	0R1	R47	010	4R7	100	470	101	471	102	472	103
Capacitance (µF)	0.1	0.47	1	4.7	10	47	100	470	1000	4700	10000

4. Case Size

Code	040054	050054	063054	080105	100105	125135	160215
Case Size (mm)	4x5.4	5x5.4	6.3x5.4	8x10.5	10x10.5	12.5x13.5	16x21.5

5. Packing

Code	T
Packing	Tape & Reel

6. Pb

Code	R
Pb	RoHS

Note: Specifications are subject to change without notice.

Kingtronics® International Company