



### FEATURES

- High Optical Output
- 810 nm Peak Emission
- Hermetically Sealed Metal TO-46 Package
- Narrow Angle for Long Distance Applications
- High Radiation Tolerance
- Excellent Power Degradation Characteristics
- Fast Response
- MIL-S-19500 Screening Available
- No Internal Coatings

### Electro-Optical Characteristics at 25 °C

Parameters	Test Conditions	Min	Typ	Max	Units
Total Power Output, $P_o$	$I_F = 100 \text{ mA}$	1.5	3		mW
Peak Emission Wavelength, $\lambda_P$	$I_F = 50 \text{ mA}$		810		nm
Spectral Bandwidth at 50 %, $\Delta\lambda$	$I_F = 50 \text{ mA}$		50		nm
Half Intensity Beam Angle, $\theta$	$I_F = 50 \text{ mA}$		8		Deg
Forward Voltage, $V_F$	$I_F = 100 \text{ mA}$		1.45	1.8	V
Reverse Breakdown Voltage, $V_R$	$I_R = 10 \mu\text{A}$	3	4		V
Capacitance, C	$V_R = 0 \text{ V}$		150		pF
Rise Time			60		nsec
Fall Time			60		nsec

### Absolute Maximum Ratings at 25°C

Parameters	Units
Power Dissipation <sup>1</sup>	180 mW
Continuous Forward Current	100 mA
Peak Forward Current (10 µs, 150 Hz) <sup>2</sup>	3 A
Reverse Voltage	3 V
Lead Soldering Temperature (1/16" from case for 10 sec)	240 °C

<sup>1</sup> Derate per Thermal Derating Curve above 25 °C.

<sup>2</sup> Derate linearly above 25 °C.


### Thermal Parameters

Parameters	Units
Storage and Operating Temperature Range	-65 °C to 150 °C
Maximum Junction Temperature	150 °C
Thermal Resistance, $R_{THJA}^1$	400 °C/W Typical
Thermal Resistance, $R_{THJA}^2$	135 °C/W Typical


<sup>1</sup> Heat transfer minimized by measuring in still air with minimum heat conducting through leads.

<sup>2</sup> Air circulating at a rapid rate to keep case temperature at 25 °C.


### Maximum Rated Thermal Derating Curve

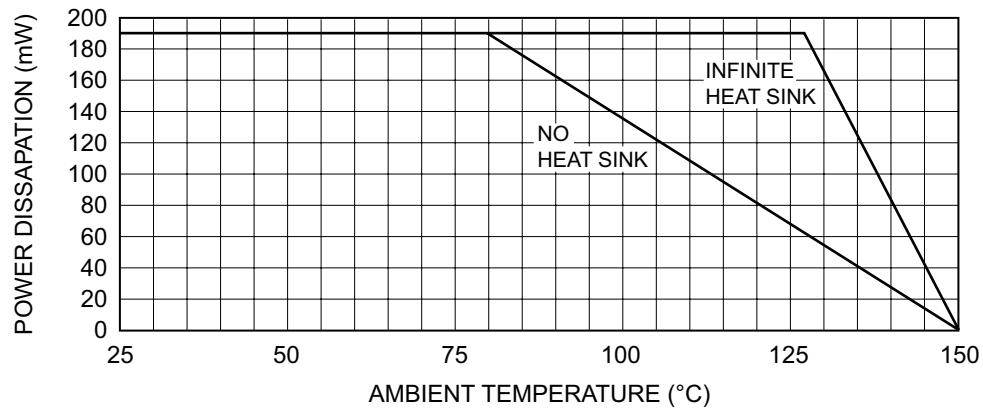


### Maximum Peak Pulse Current

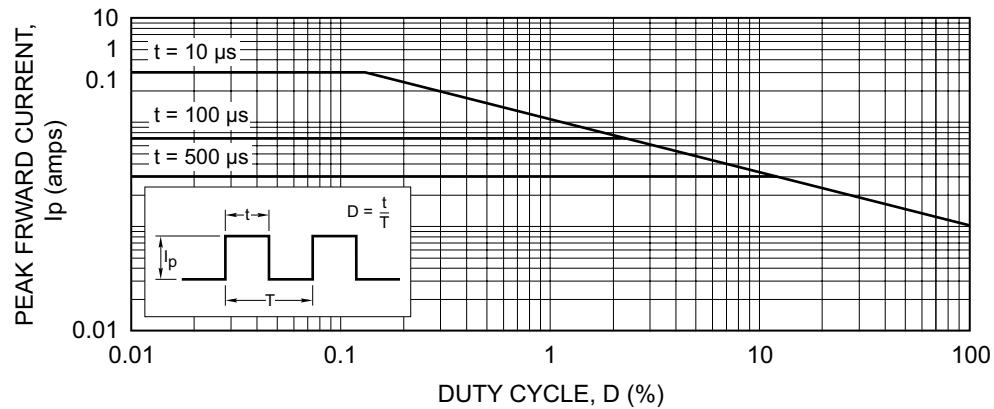


### Typical Power Output vs Neutron Irradiation

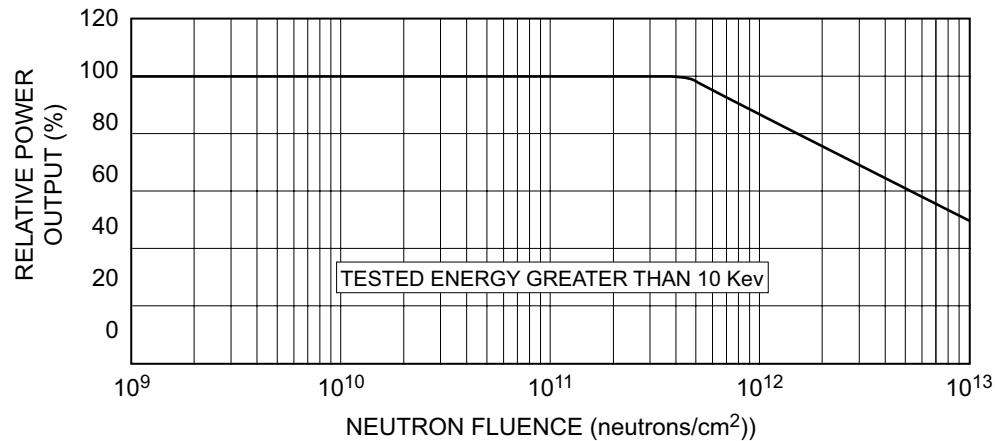


## Typical Degradation Curve

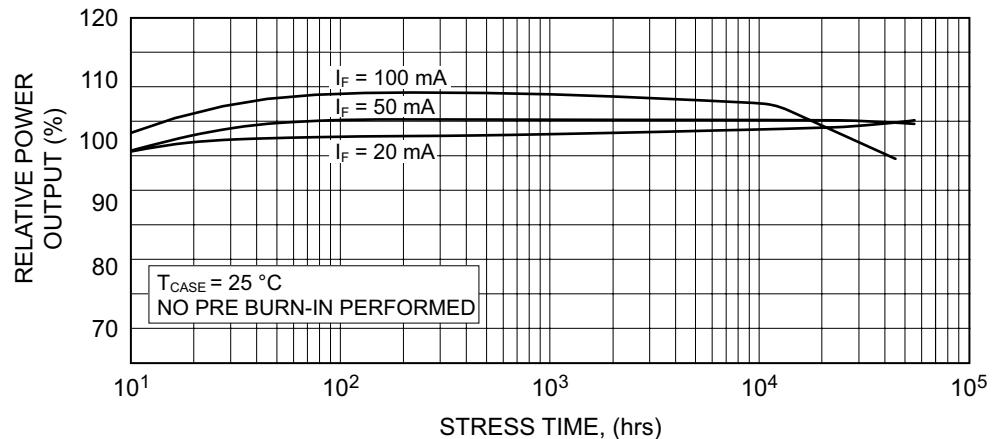


## Typical Radiation Pattern

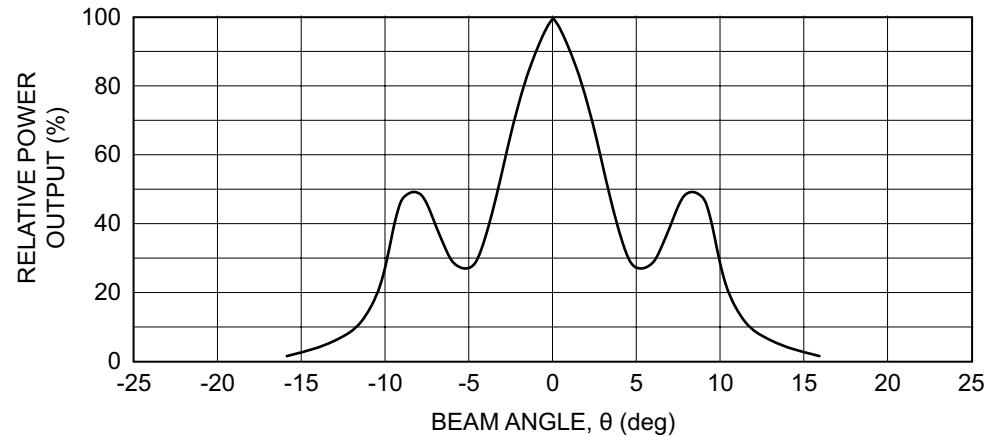


## Typical Power Output vs Temperature

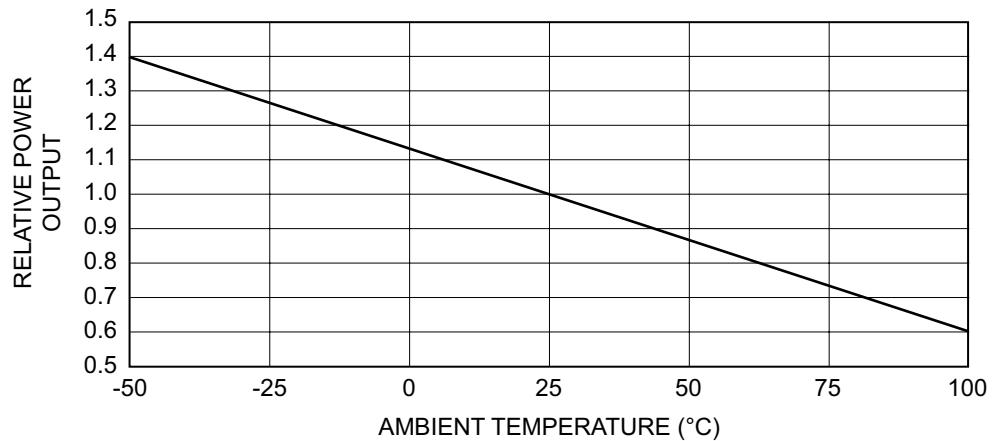


**Typical Spectral Output**

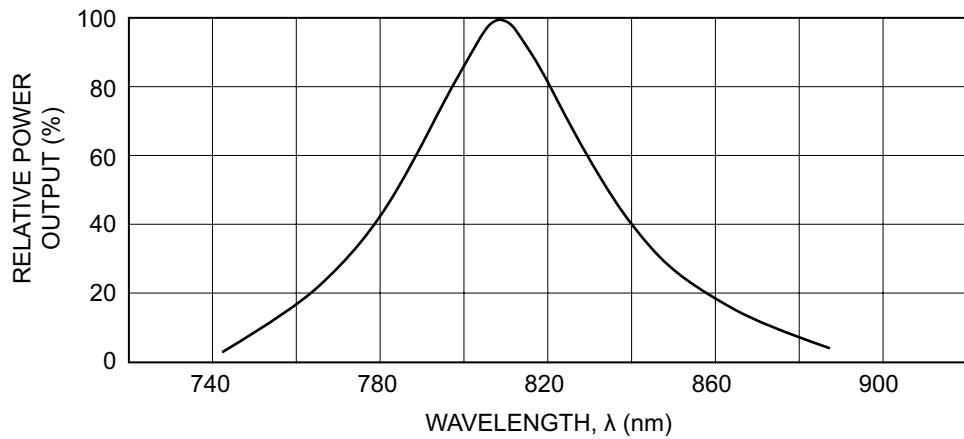

**Typical Power Output vs Forward Current**

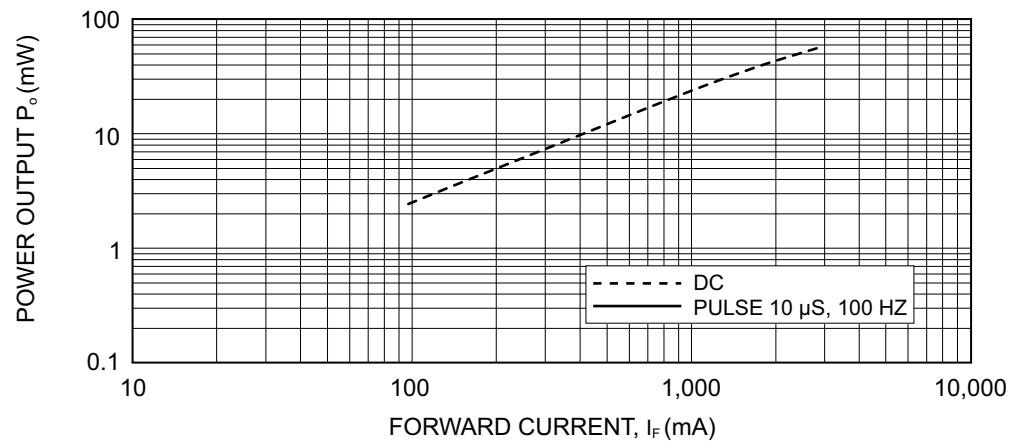

### Package Information

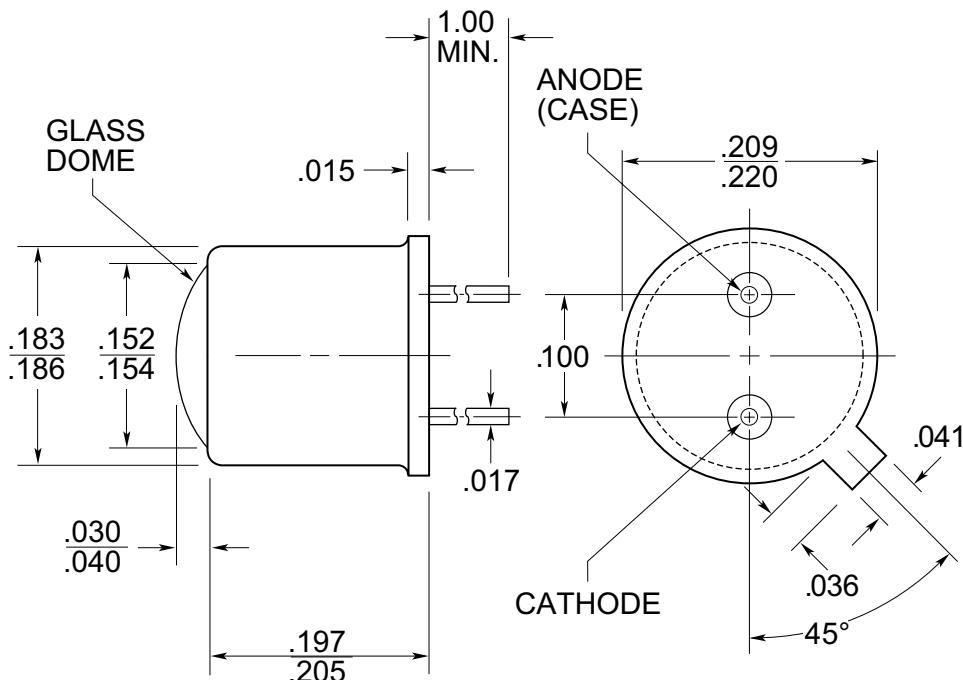

Dimensions are nominal values in inches unless otherwise specified.

### Ordering Information

OD-810-005      Hi-Rel Radiation Hardened Narrow Angle IR 810 nm Emitter Shipped in ESD Bag

Specifications are subject to change without prior notice.

1260 Calle Suerte, Camarillo, California 93012

Phone: +1 805.499.0335 | Fax: +1 805.499.8108 | sales@optodiode.com | www.optodiode.com