

# SS82 THRU SS810

8.0 AMP SCHOTTKY BARRIER RECTIFIERS



## FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability
- \* Epitaxial construction

## MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.215 grams
- \* Lead Free Finish/RoHS Compliant


## VOLTAGE RANGE

20 to 100 Volts

## CURRENT

8.0 Amperes

DO-214AB(SMC)

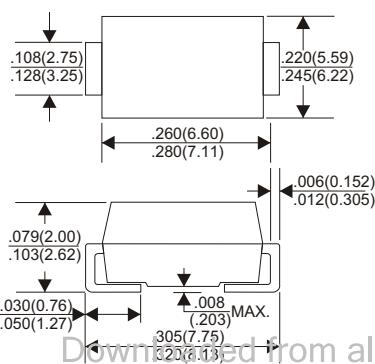

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

TYPE NUMBER	SS82	SS84	SS845	SS85	SS86	SS88	SS810	UNITS
Maximum Recurrent Peak Reverse Voltage	20	40	45	50	60	80	100	V
Maximum RMS Voltage	14	28	31	35	42	56	70	V
Maximum DC Blocking Voltage	20	40	45	50	60	80	100	V
Maximum Average Forward Rectified Current See Fig. 1						8.0		A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)						150		A
Maximum Instantaneous Forward Voltage at 8.0A	0.55		0.70		0.85			V
Maximum DC Reverse Current Ta=25°C				500				uA
at Rated DC Blocking Voltage Ta=100°C				50				mA
Typical Junction Capacitance (Note1)				380				pF
Typical Thermal Resistance R <sub>θJA</sub> (Note 2)				10				°C/W
Operating Temperature Range T <sub>J</sub>	-65	— +125			-65	— +150		°C
Storage Temperature Range T <sub>STG</sub>				-65	— +150			°C


NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal Resistance Junction to Ambient Vertical PC Board Mounting 0.5"(12.7mm) Lead Length.


## RATING AND CHARACTERISTIC CURVES (SS82 THRU SS810)

Figure 1  
Typical Forward Characteristics

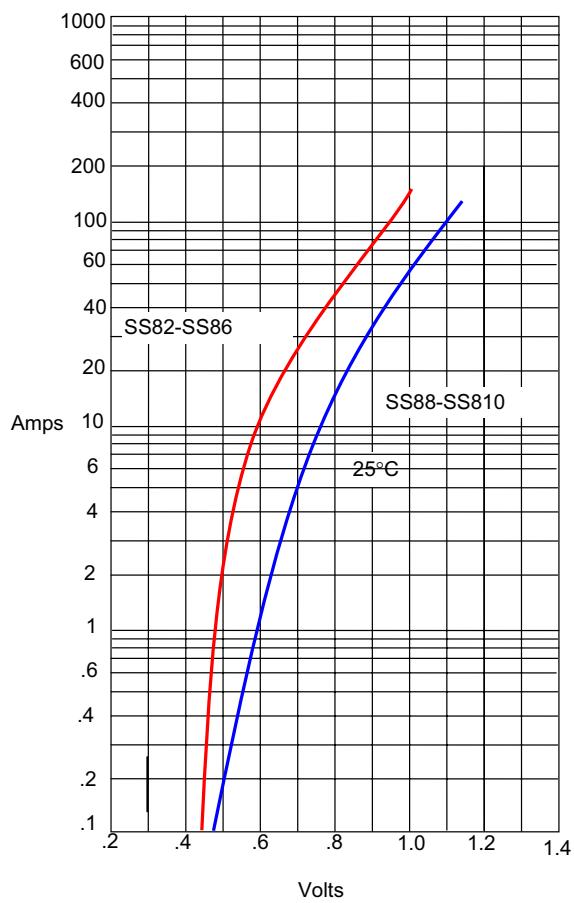

Instantaneous Forward Current - Amperes *versus*  
Instantaneous Forward Voltage - Volts


Figure 2  
Forward Derating Curve

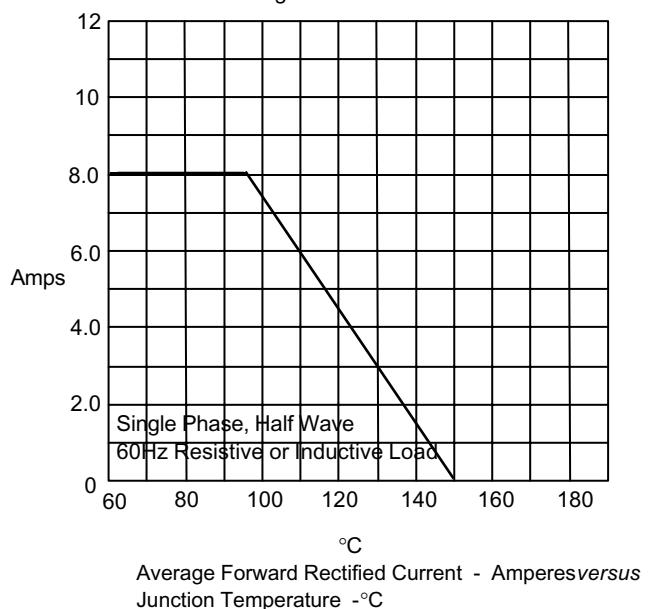

Average Forward Rectified Current - Amperes *versus*  
Junction Temperature - °C


Downloaded from alldatasheet.com

Figure 3  
Junction Capacitance

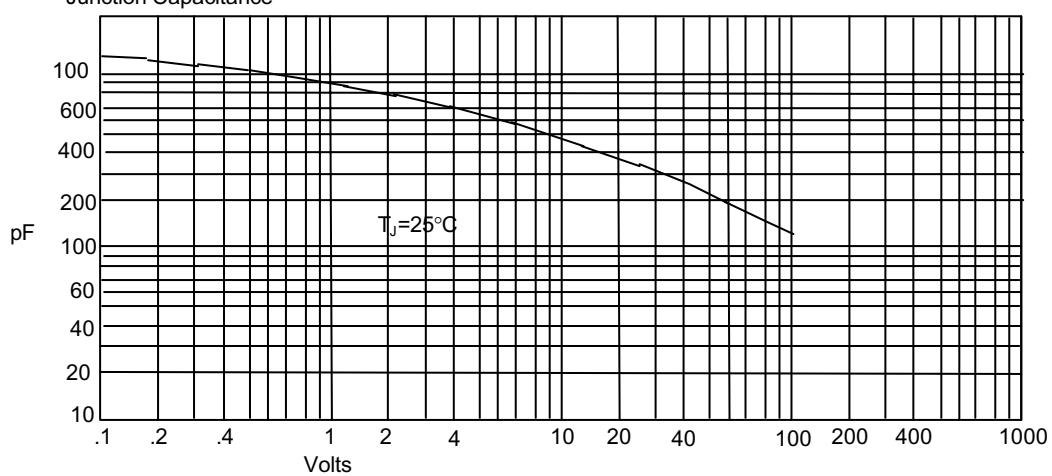


Junction Capacitance - pF *versus*  
Reverse Voltage - Volts

Figure 4  
Typical Reverse Characteristics

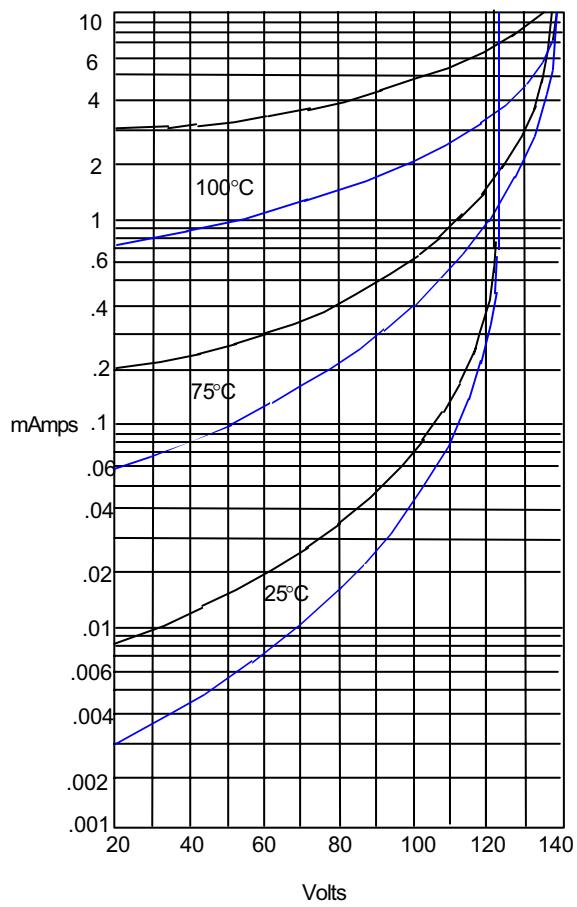

Instantaneous Reverse Leakage Current - MicroAmperes versus  
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5  
Peak Forward Surge Current

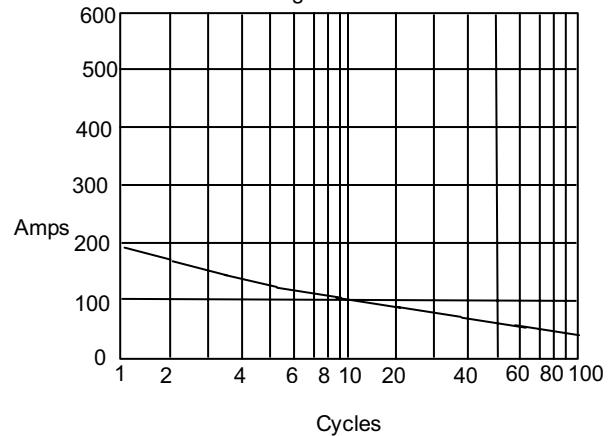

Peak Forward Surge Current - Amperes versus  
Number Of Cycles At 60Hz - Cycles

Downloaded from alldatasheet.com

SS82-845	—
SS85-810	—