

NGB8245N

Ignition IGBT 20 A, 450 V, N-Channel D²PAK

This Logic Level Insulated Gate Bipolar Transistor (IGBT) features monolithic circuitry integrating ESD and Overvoltage clamped protection for use in inductive coil drivers applications. Primary uses include Ignition, Direct Fuel Injection, or wherever high voltage and high current switching is required.

Features

- Ideal for Coil-on-Plug and Driver-on-Coil Applications
- D²PAK Package Offers Smaller Footprint for Increased Board Space
- Gate-Emitter ESD Protection
- Temperature Compensated Gate-Collector Voltage Clamp Limits Stress Applied to Load
- Low Threshold Voltage for Interfacing Power Loads to Logic or Microprocessor Devices
- Low Saturation Voltage
- High Pulsed Current Capability
- This is a Pb-Free Device

Applications

- Ignition Systems

MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CES}	500	V
Collector-Gate Voltage	V_{CER}	500	V
Gate-Emitter Voltage	V_{GE}	± 15	V
Collector Current-Continuous @ $T_C = 25^\circ\text{C}$ - Pulsed	I_C	20 50	A_{DC} A_{AC}
Continuous Gate Current	I_G	1.0	mA
Transient Gate Current ($t \leq 2$ ms, $f \leq 100$ Hz)	I_G	20	mA
ESD (Charged-Device Model)	ESD	2.0	kV
ESD (Human Body Model) $R = 1500 \Omega$, $C = 100$ pF	ESD	8.0	kV
ESD (Machine Model) $R = 0 \Omega$, $C = 200$ pF	ESD	500	V
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	150 1.0	W W/ $^\circ\text{C}$
Operating & Storage Temperature Range	T_J , T_{stg}	-55 to $+175$	$^\circ\text{C}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.




Expertise Applied | Answers Delivered


Littelfuse.com

20 A, 450 V

$V_{CE(on)} \leq 1.24 \text{ V @}$
 $I_C = 15 \text{ A, } V_{GE} \geq 4.0 \text{ V}$

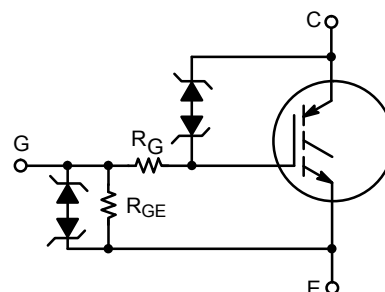

MARKING DIAGRAM

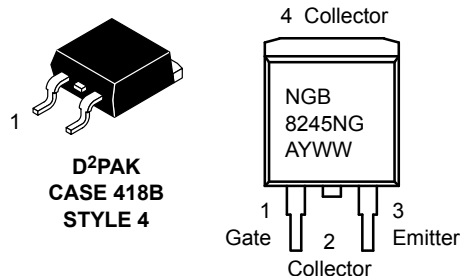

NGB8245N = Device Code
A = Assembly Location
Y = Year
WW = Work Week
G = Pb-Free Package

ORDERING INFORMATION

Device	Package	Shipping†
NGB8245NT4G	D ² PAK (Pb-Free)	800 / Tape & Reel

UNCLAMPED COLLECTOR-TO-EMITTER AVALANCHE CHARACTERISTICS

Characteristic	Symbol	Value	Unit
Single Pulse Collector-to-Emitter Avalanche Energy $V_{CC} = 50\text{ V}$, $V_{GE} = 5.0\text{ V}$, $Pk\ I_L = 9.5\text{ A}$, $R_G = 1\text{ k}\Omega$, $L = 3.5\text{ mH}$, Starting $T_C = 150^\circ\text{C}$	E_{AS}	158	mJ

THERMAL CHARACTERISTICS

Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.0	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Ambient (Note 1)	$R_{\theta JA}$	62.5	$^\circ\text{C/W}$
Maximum Temperature for Soldering Purposes, 1/8" from case for 5 seconds (Note 2)	T_L	275	$^\circ\text{C}$

1. When surface mounted to an FR4 board using the minimum recommended pad size.
2. For further details, see Soldering and Mounting Techniques Reference Manual: SOLDERRM/D.

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Test Conditions	Temperature	Min	Typ	Max	Unit
----------------	--------	-----------------	-------------	-----	-----	-----	------

OFF CHARACTERISTICS (Note 3)

Collector-Emitter Clamp Voltage	BV_{CES}	$I_C = 2.0\text{ mA}$	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	430	450	470	V
		$I_C = 10\text{ mA}$	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	450	475	500	
		$I_C = 12\text{ A}$, $L = 3.5\text{ mH}$, $R_G = 1\text{ k}\Omega$ (Note 4)	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	420	450	480	
Collector-Emitter Leakage Current	I_{CES}	$V_{CE} = 15\text{ V}$, $V_{GE} = 0\text{ V}$	$T_J = 25^\circ\text{C}$		0.002	1.0	μA
		$V_{CE} = 250\text{ V}$, $R_G = 1\text{ k}\Omega$	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	0.5	2.0	100	
Reverse Collector-Emitter Clamp Voltage	$BV_{CES(R)}$	$I_C = -75\text{ mA}$	$T_J = 25^\circ\text{C}$	30	33	39	V
			$T_J = 175^\circ\text{C}$	31	35	40	
			$T_J = -40^\circ\text{C}$	30	31	37	
Reverse Collector-Emitter Leakage Current	$I_{CES(R)}$	$V_{CE} = -24\text{ V}$	$T_J = 25^\circ\text{C}$	–	0.4	1.0	mA
			$T_J = 175^\circ\text{C}$	–	20	35	
			$T_J = -40^\circ\text{C}$	–	0.04	0.2	
Gate-Emitter Clamp Voltage	BV_{GES}	$I_G = \pm 5.0\text{ mA}$	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	12	12.5	14	V
Gate-Emitter Leakage Current	I_{GES}	$V_{GE} = \pm 5.0\text{ V}$	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	200	316	350	μA
Gate Resistor	R_G		$T_J = -40^\circ\text{C to } 175^\circ\text{C}$		70		Ω
Gate-Emitter Resistor	R_{GE}		$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	14.25	16	25	$\text{k}\Omega$

ON CHARACTERISTICS (Note 3)

Gate Threshold Voltage	$V_{GE(th)}$	$I_C = 1.0\text{ mA}$, $V_{GE} = V_{CE}$	$T_J = 25^\circ\text{C}$	1.5	1.8	2.1	V
			$T_J = 175^\circ\text{C}$	0.7	1.0	1.3	
			$T_J = -40^\circ\text{C}$	1.7	2.0	2.3	
Threshold Temperature Coefficient (Negative)				4.0	4.6	5.2	$\text{mV}/^\circ\text{C}$
Collector-to-Emitter On-Voltage	$V_{CE(on)}$	$I_C = 10\text{ A}$, $V_{GE} = 3.7\text{ V}$	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	0.8	1.11	1.97	V
		$I_C = 10\text{ A}$, $V_{GE} = 4.0\text{ V}$	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	0.8	1.10	1.85	
		$I_C = 15\text{ A}$, $V_{GE} = 4.0\text{ V}$	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	0.8	1.24	2.00	
Forward Transconductance	g_{fs}	$I_C = 6.0\text{ A}$, $V_{CE} = 5.0\text{ V}$	$T_J = 25^\circ\text{C}$	10	19	25	Mhos

DYNAMIC CHARACTERISTICS (Note 3)

Input Capacitance	C_{ISS}	$f = 10\text{ kHz}$, $V_{CE} = 25\text{ V}$	$T_J = 25^\circ\text{C}$	1100	1400	1600	pF
Output Capacitance	C_{OSS}			50	65	80	
Transfer Capacitance	C_{RSS}			15	20	25	

NGB8245N

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Test Conditions	Temperature	Min	Typ	Max	Unit
----------------	--------	-----------------	-------------	-----	-----	-----	------

SWITCHING CHARACTERISTICS (Note 3)

Turn-On Delay Time (Resistive) 10% V_{GE} to 10% I_C	$t_{d(on)R}$	$V_{CC} = 14\text{ V}, R_L = 1.0\ \Omega,$ $R_G = 1.0\text{ k}\Omega, V_{GE} = 5.0\text{ V}$	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	0.1	1.0	2.0	μs
Rise Time (Resistive) 10% I_C to 90% I_C	t_{rR}		$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	1.0	3.4	6.0	
Turn-Off Delay Time (Resistive) 90% V_{GE} to 90% I_C	$t_{d(off)R}$	$V_{CC} = 14\text{ V}, R_L = 1.0\ \Omega,$ $R_G = 1.0\text{ k}\Omega, V_{GE} = 5.0\text{ V}$	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	2.0	4.5	8.0	μs
Fall Time (Resistive) 90% I_C to 10% I_C	t_{fR}		$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	3.0	8.0	12	
Turn-Off Delay Time (Inductive) 90% V_{GE} to 90% I_C	$t_{d(off)L}$	$V_{CE} = BV_{CES}, L = 0.5\text{mH},$ $R_G = 1.0\text{ k}\Omega, I_C = 10\text{ A},$ $V_{GE} = 5.0\text{ V}$	$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	6.5	9.7	12.5	μs
Fall Time (Inductive) 90% I_C to 10% I_C	t_{fL}		$T_J = -40^\circ\text{C to } 175^\circ\text{C}$	6.0	8.3	11	

3. Electrical Characteristics at temperature other than 25°C, Dynamic and Switching characteristics are not subject to production testing.

4. Not subject to production testing.

TYPICAL ELECTRICAL CHARACTERISTICS

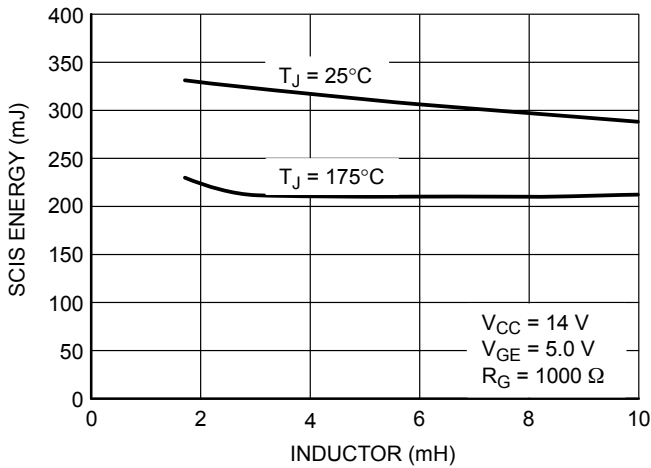


Figure 1. Self Clamped Inductive Switching

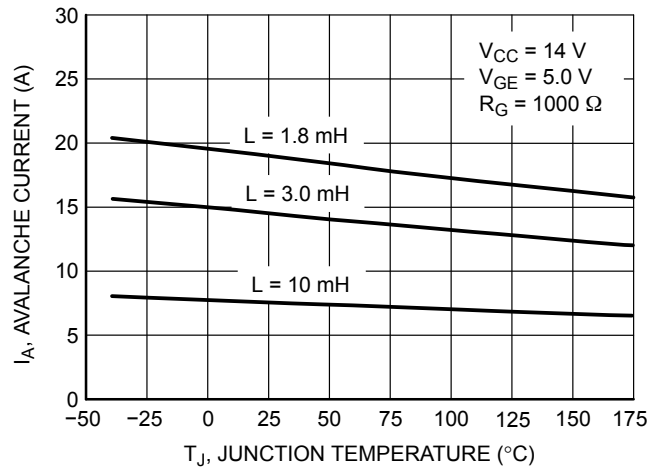


Figure 2. Open Secondary Avalanche Current vs. Temperature

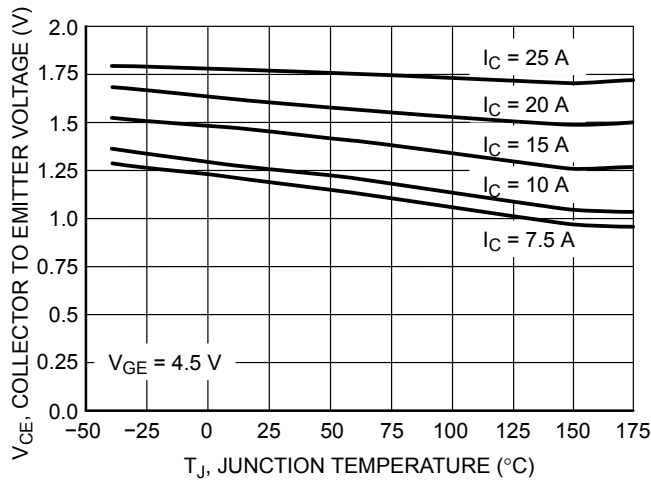


Figure 3. Collector-to-Emitter Voltage vs. Junction Temperature

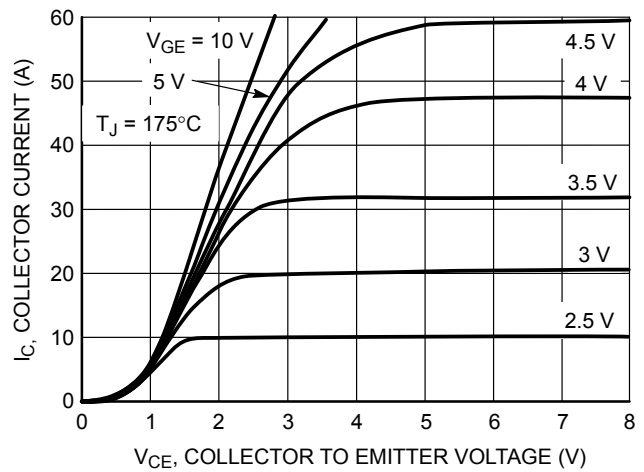


Figure 4. Collector Current vs. Collector-to-Emitter Voltage

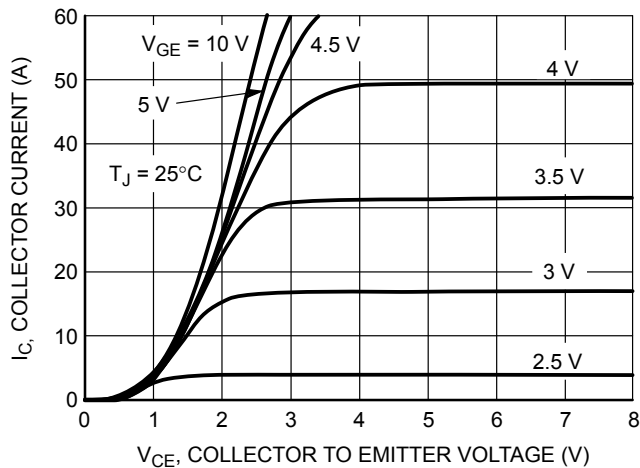


Figure 5. Collector Current vs. Collector-to-Emitter Voltage

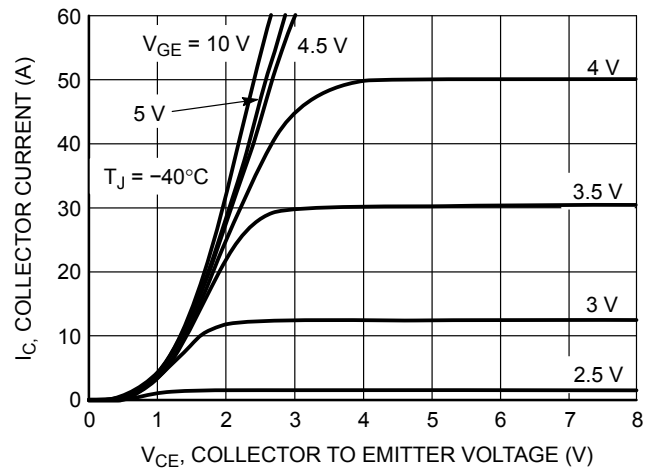


Figure 6. Collector Current vs. Collector-to-Emitter Voltage

TYPICAL ELECTRICAL CHARACTERISTICS

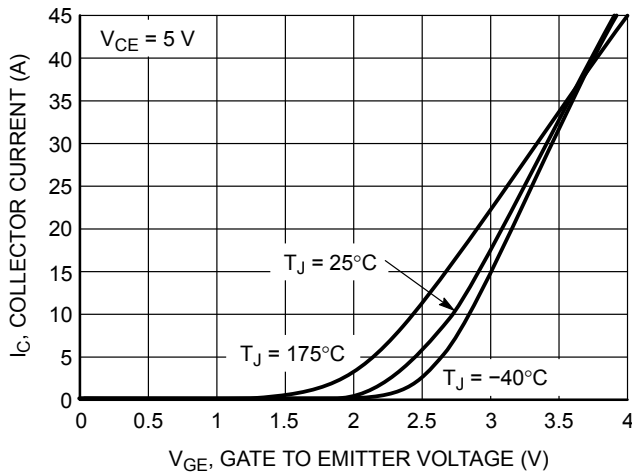


Figure 7. Transfer Characteristics

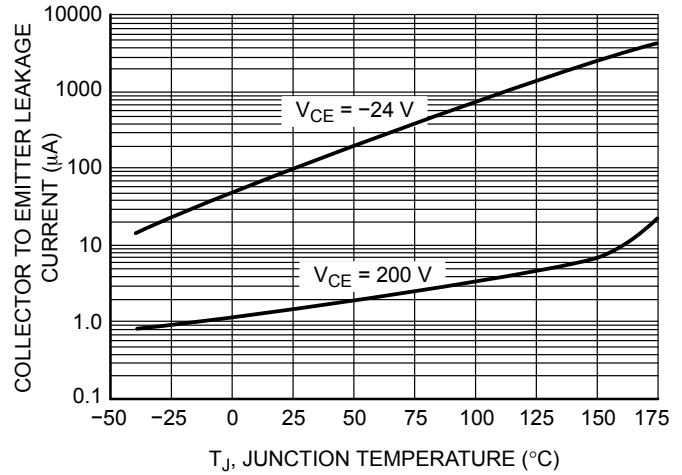


Figure 8. Collector-to-Emitter Leakage Current vs. Temperature

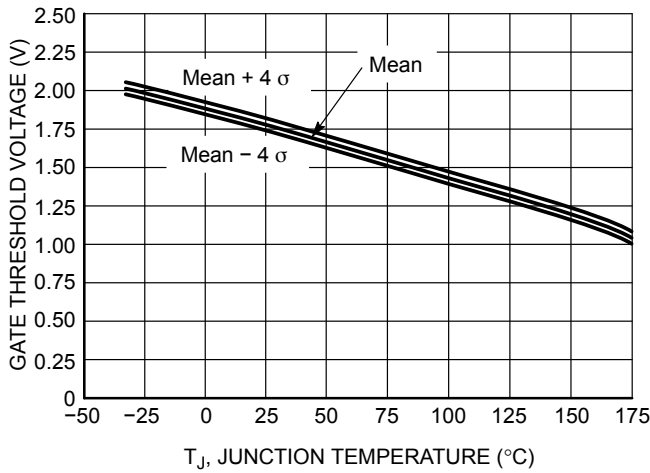


Figure 9. Gate Threshold Voltage vs. Temperature

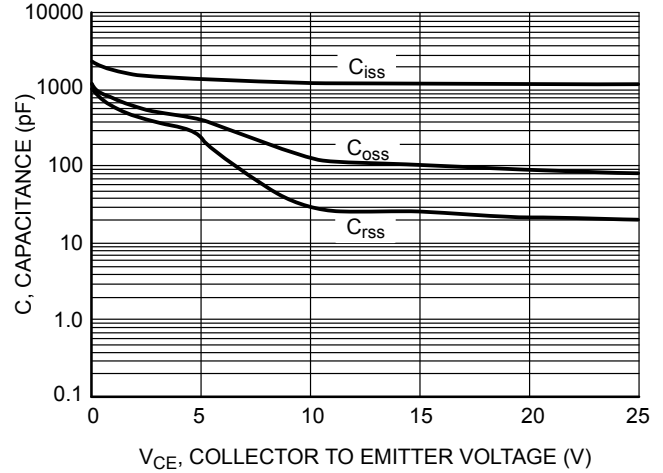


Figure 10. Capacitance vs. Collector-to-Emitter Voltage

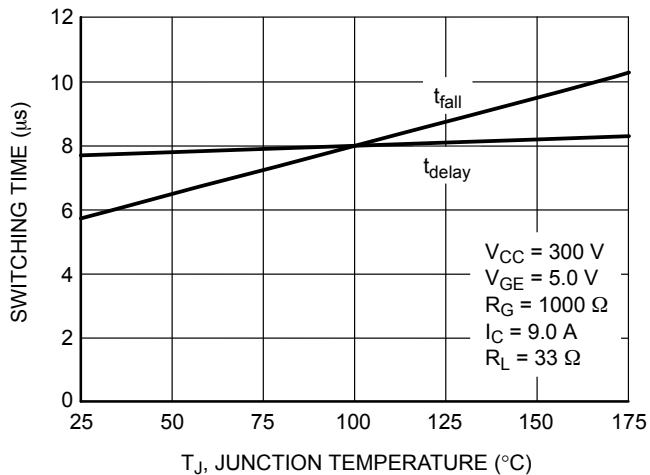


Figure 11. Resistive Switching Fall Time vs. Temperature

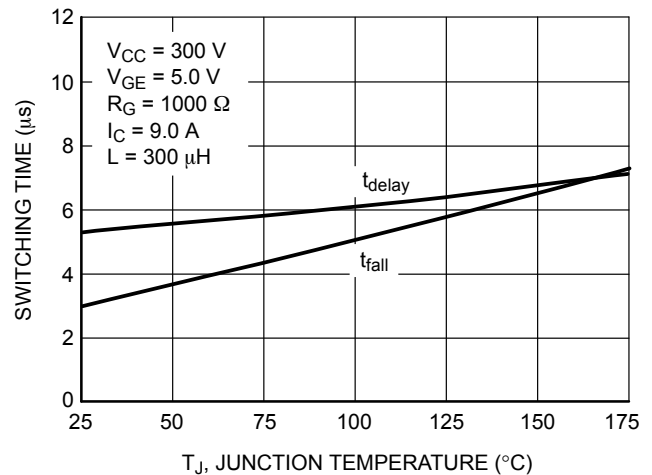
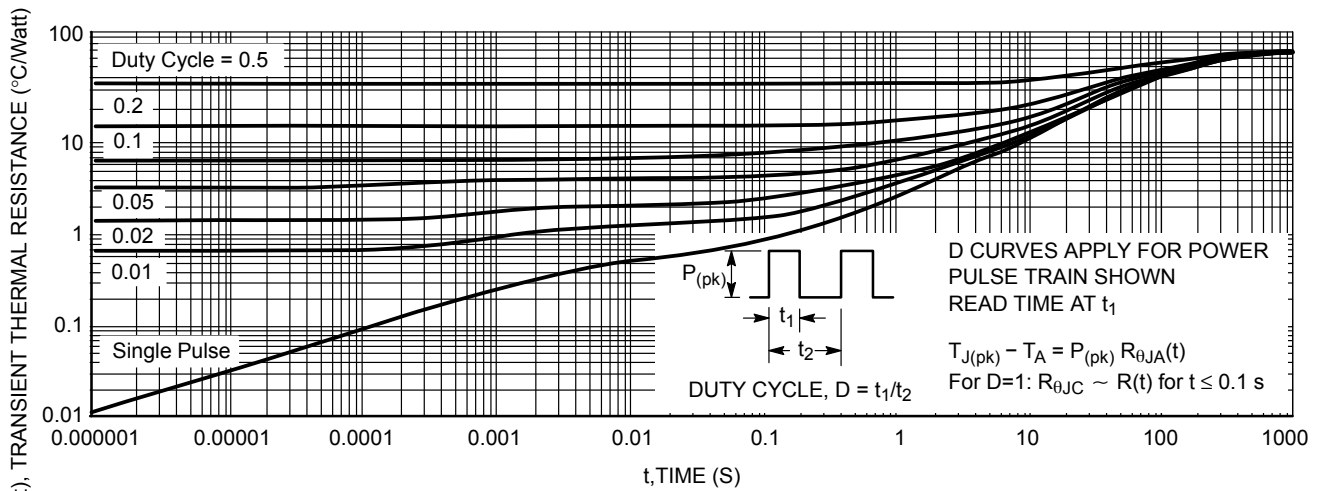
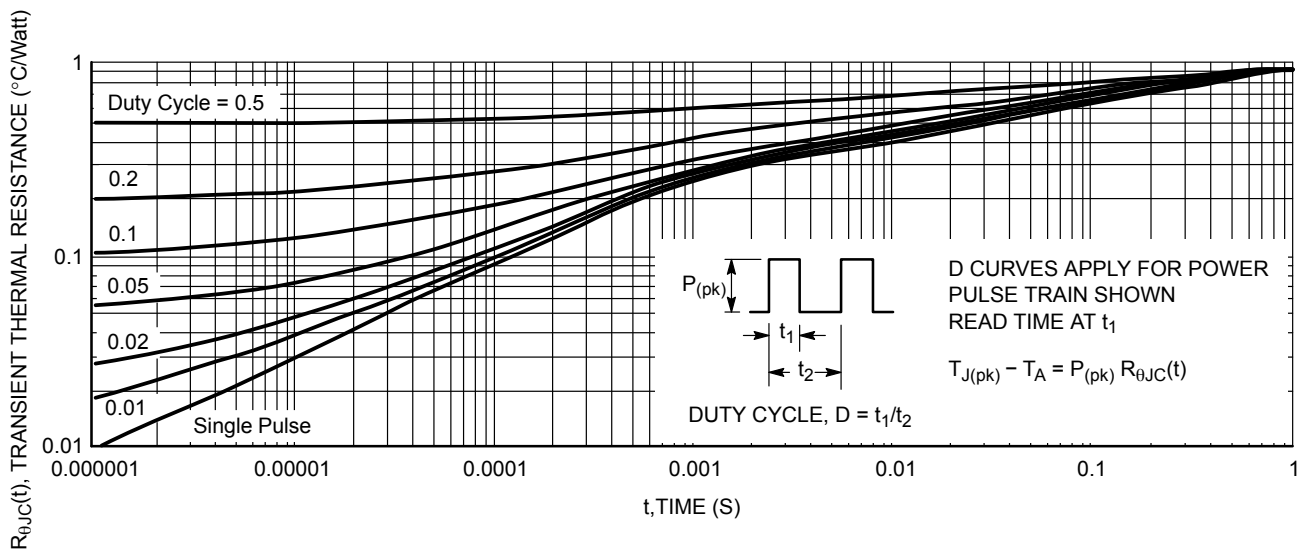


Figure 12. Inductive Switching Fall Time vs. Temperature



**Figure 13. Minimum Pad Transient Thermal Resistance
(Non-normalized Junction-to-Ambient)**

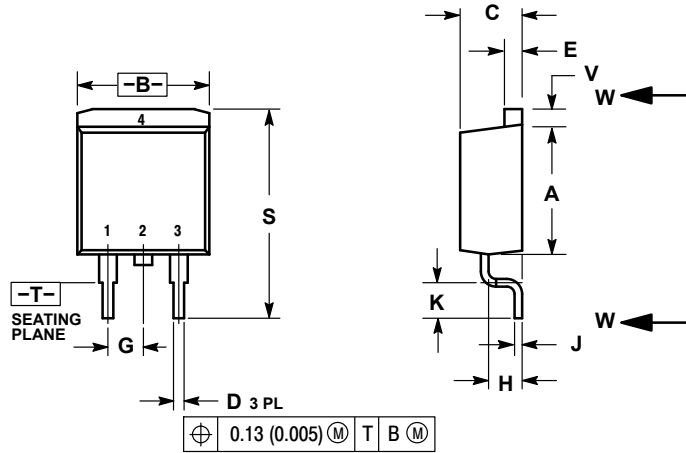


**Figure 14. Best Case Transient Thermal Resistance
(Non-normalized Junction-to-Case Mounted on Cold Plate)**

NGB8245N

PACKAGE DIMENSIONS


D²PAK 3 CASE 418B-04 ISSUE K




- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. 418B-01 THRU 418B-03 OBSOLETE, NEW STANDARD 418B-04.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.340	0.380	8.64	9.65
B	0.380	0.405	9.65	10.29
C	0.160	0.190	4.06	4.83
D	0.020	0.035	0.51	0.89
E	0.045	0.055	1.14	1.40
F	0.310	0.350	7.87	8.89
G	0.100 BSC		2.54 BSC	
H	0.080	0.110	2.03	2.79
J	0.018	0.025	0.46	0.64
K	0.090	0.110	2.29	2.79
L	0.052	0.072	1.32	1.83
M	0.280	0.320	7.11	8.13
N	0.197 REF		5.00 REF	
P	0.079 REF		2.00 REF	
R	0.039 REF		0.99 REF	
S	0.575	0.625	14.60	15.88
V	0.045	0.055	1.14	1.40

- STYLE 4:
1. GATE
 2. COLLECTOR
 3. EMITTER
 4. COLLECTOR

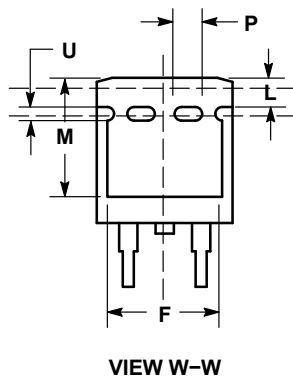

SOLDERING FOOTPRINT*

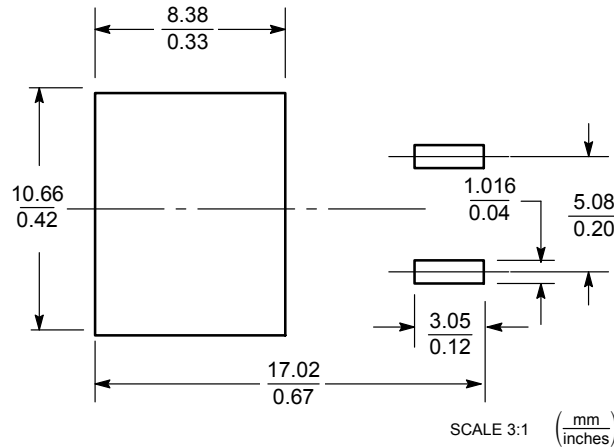

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.

Littelfuse.com