


Specification	AXQCV500-Au	Rev.: 01	Date: 2012-08-13
---------------	-------------	----------	------------------

Type : **Quartz Crystal Sensor Element (Monitor Crystal)**  
**Polished, 25.4 mm diameter**

Parameter	min.	typ.	max.	Unit	Condition
Nominal frequency		5.000		MHz	
Adjustment frequency		5.000		MHz	
Crystal cut		AT			
Overtone		1			
Crystal contour		Plano-plano			
Adjustment tolerance	-7		+7	kHz	@ 25°C
Frequency stability					
Over operating temperature range	-50		+50	ppm	
Resonance resistance $R_r$			20	$\Omega$	
Motional capacitance $C_1$				fF	
Shunt capacitance $C_0$			7	pF	
Drive level		100		$\mu$ W	
Operating temperature range	0		+70	°C	
Storage temperature range	-40		+105	°C	
QCV diameter		25.4 ± 0.05		mm	
Blank surface quality		polished			
Electrode diameter Side A		12.8		mm	See drawing
Electrode material Side A		Cr-Ag			
Electrode Side B		6.4		mm	See drawing
Electrode material Side B		Cr-Ag			

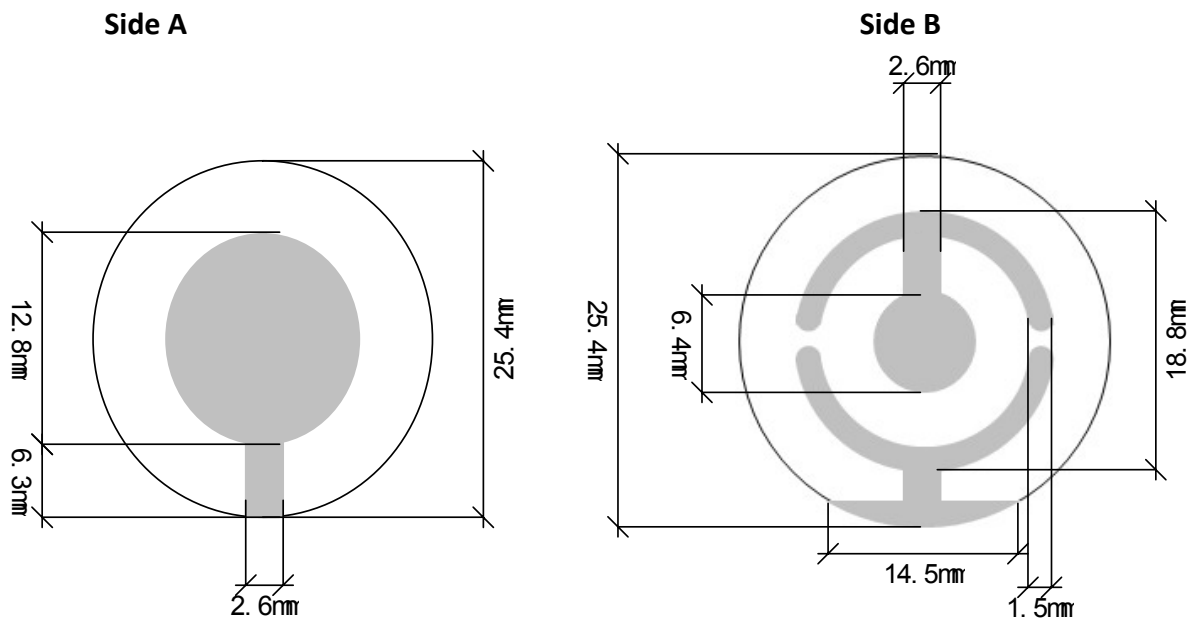

**Ordering Code:**

Model (Specification)	Frequency [MHz]
AXQCV500-Au	5.000

**Revision History**

<b>Rev.</b>	<b>Drawing</b>	<b>Date</b> [dd.mm.yyyy]	<b>Remarks</b>	<b>Author</b>	<b>Checked</b>
1.0		13.08.2012		BN	BN
2	D1	02.06.2014	Editorial changes	BN	BN