





SWITCH SCHEMATIC






CIRCUIT LAYOUT



ISOMETRIC

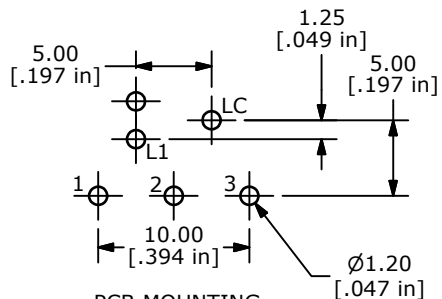

PCB MOUNTING

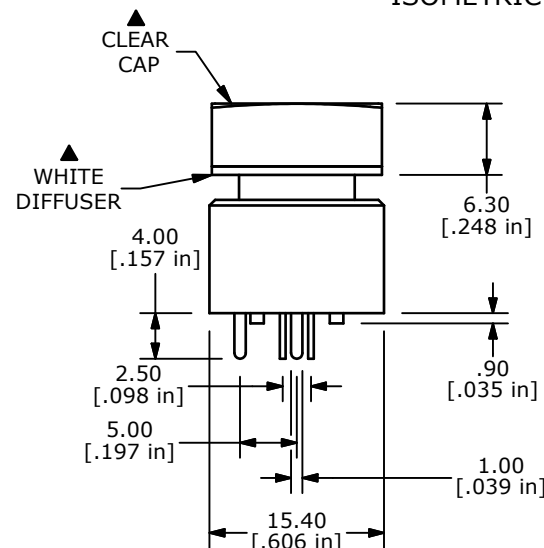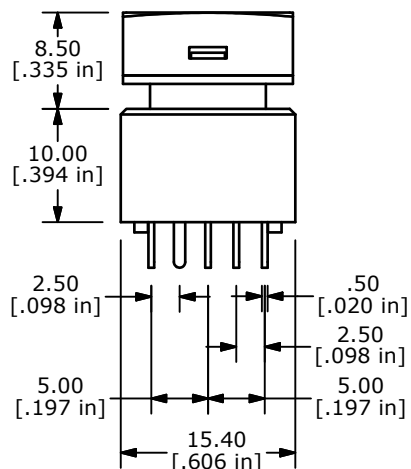

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. CONTACT RATING: 0.4VA MAX. @ 28 V (AC OR DC)
5. CONTACT MATERIAL: GOLD
6. ELECTRICAL LIFE: 200,000 Typical
7. MECHANICAL LIFE:
1,000,000 CYCLES TYP.
8. OPERATING TEMP: -20°C TO +70°C
9. OPERATING FORCE: 200 ± 100 gf
10. CONTACT RESISTANCE:
100 MILLI-OHM INITIAL TYP. MAX.
11. DIELECTRIC STRENGTH:
1000 VAC FOR 1 MINUTE
12. TRAVEL TO MAKE: 2.20mm ± 0.2
13. 2002/95/EC (ROHS) COMPLIANT
14. ▲ DENOTES CRITICAL PARAMETER
- ▲ 15. LED COLOR: BLUE: 1 CHIP; 3.5VDC, @20mA TYP.
GRN: 3 CHIPS; 2.1VDC, @20mA TYP.



D	19751	UPDATE DRAWING	03/10/11	BMA
C	17764	CHANGED PART DESCRIPTION	10/10/07	BF
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE ULP12EEP1RSSCL1BLU1GRN3				
SCALE	DATE	DR	DWG	REV
1.5:1	10/10/2007	BF	B800050	D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED