

# ***DS2XW SERIES***

**SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER**

产

品

规

格

确

认

书

# DS22W THRU DS220W

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER



康比電子  
HORNBY ELECTRONIC

**REVERSE VOLTAGE:** 20 to 200 VOLTS

**FORWARD CURRENT:** 2.0 AMPERE

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- High current capacity
- Built-in strain relief
- Low profile package
- Metal to silicon rectifier, majority carrier conduction
- High surge capacity
- Low power loss, high efficiency
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering : 250°C /10 seconds at terminals

### MECHANICAL DATA




Case: Molded plastic, SOD-123FL

Terminals: Solder plated, solderable per MIL-STD-750, method 2026 guaranteed

Polarity: Color band denotes cathode end

Packaging: 12mm tape per EIA STD RS-481

### SOD-123FL

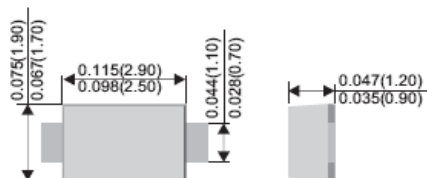

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	DS22W	DS24W	DS26W	DS28W	DS210W	DS215W	DS220W	Units
Marking Code		S22	S24	S26	S28	S210	S215	S220	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	40	60	80	100	150	200	Volts
Maximum RMS Voltage	$V_{RMS}$	14	28	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	$V_{DC}$	20	40	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current See Fig. 1	$I_{(AV)}$	2.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	50							Amp
Maximum Forward Voltage at 2.0A (Note 1)	$V_F$	0.55	0.70	0.85	0.95				Volts
Maximum Reverse Current at $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=100^\circ\text{C}$	$I_R$	0.5							mAmp
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	85							°C/W
	$R_{\theta JL}$	28							
Operating Junction Temperature Range	$T_J$	-55 to +150							°C
Storage Temperature Range	$T_{stg}$	-55 to +150							°C

### NOTES:

1- Pulse test: 300µs pulse width, 1% duty cycle


2- P.C.B. mounted with 5.0 x 5.0mm copper pad areas

# DS22W THRU DS220W


## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

### RATINGS AND CHARACTERISTIC CURVES


**Fig.1 Forward Current Derating Curve**

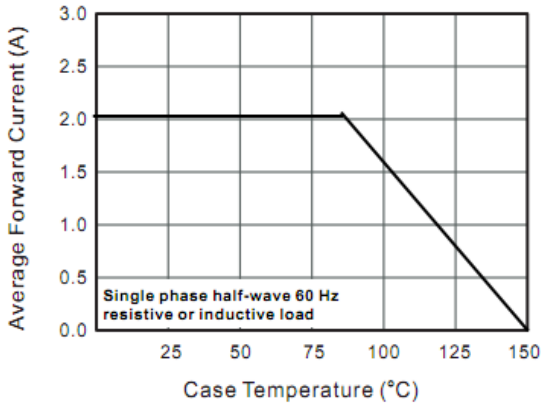

**Fig.2 Typical Reverse Characteristics**

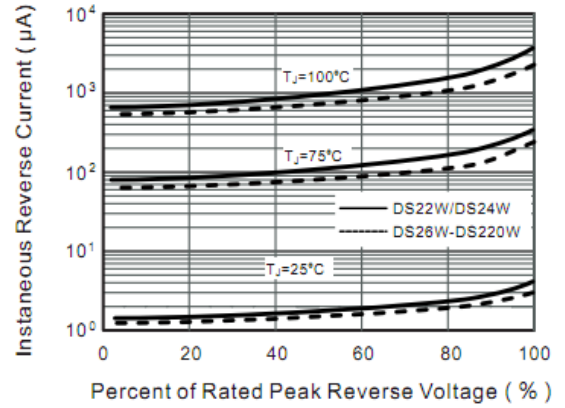

**Fig.3 Typical Forward Characteristic**

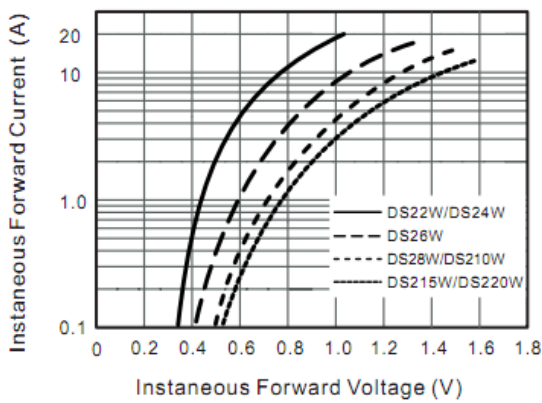

**Fig.4 Maximum Non-Repetitive Peak Forward Surge Current**

