



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 1217MHz SMD 3.0X3.0 mm(BW=44MHz)

TST Part No.: TA1165A

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: Paul Ni *Paul*

Approved by: Francis Chen *Francis Chen*

Date: 2010/6/09

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1217 MHz

MODEL NO.:TA1165A

REV. NO : 1.0

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -30°C to +80°C
4. Storage Temperature: -30°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	1217	-
Insertion Loss within 1195~1239MHz IL	dB	-	3.1	4.0
Amplitude ripple within 1195 ~ 1239 MHz	dB	-	1.0	3.0
Attenuation (Reference level from 0 dB)				
1107 ~ 1167 MHz	dB	40	51.6	-
1267 ~ 1280 MHz	dB	26	33.0	-
1280 ~ 1310 MHz	dB	35	42.0	-
1310 ~ 1327 MHz	dB	40	48.6	-
Source impedance Zs	Ω	-	50	-
Load impedance ZL	Ω	-	50	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

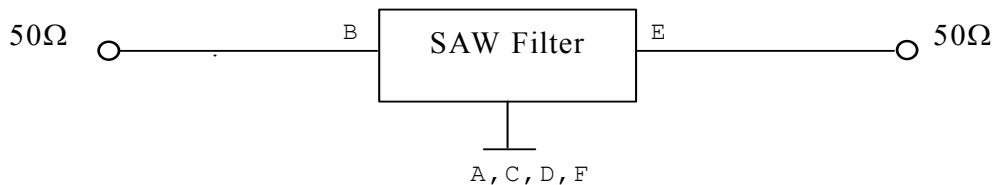


D.OUTLINE DRAWING:

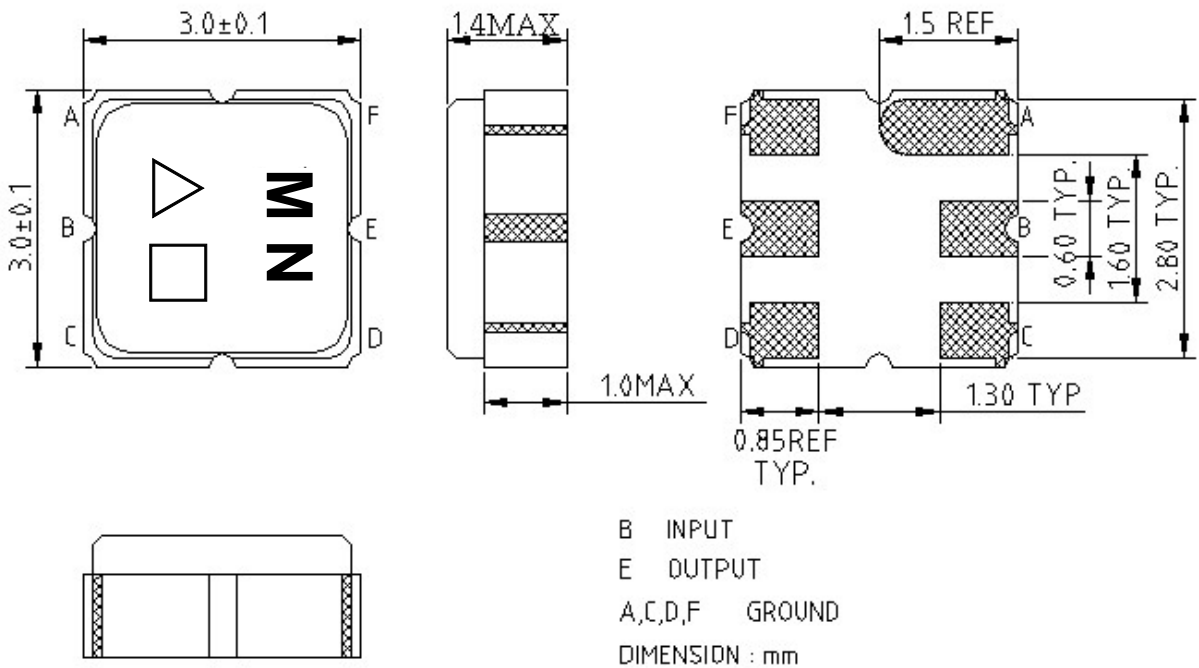


- △ : Year Code(2010→0,2011→1...2019→9)
- : Date Code(Follow the table from planner each year)

E. PCB Foo

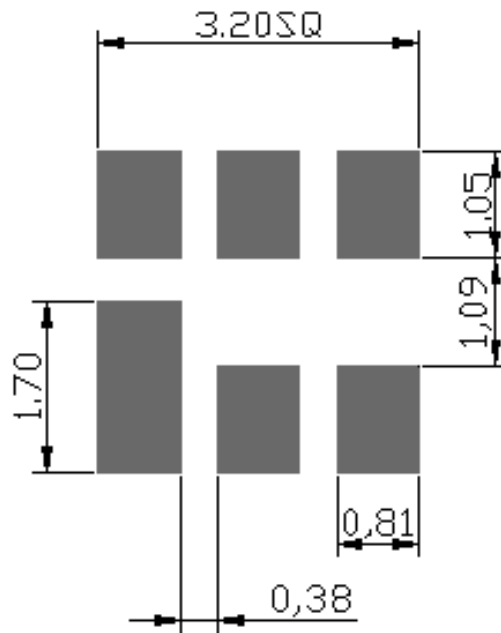


F. Frequency Characteristics : (Simulations)

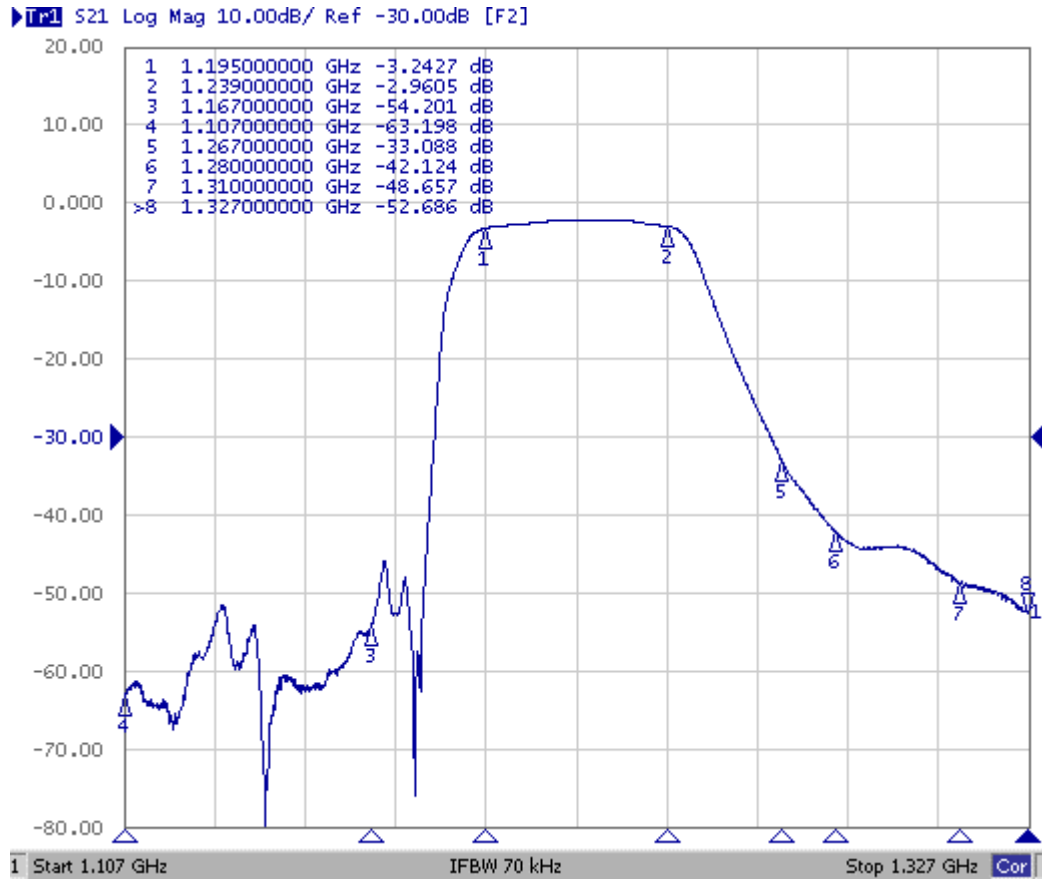


G. PACKING:

1. REEL DIMENSION

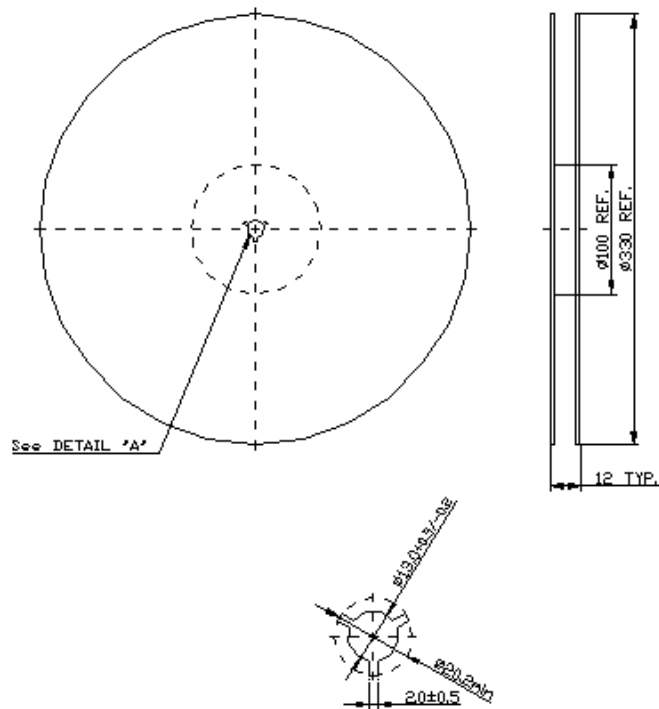

2. TAPE DIMENSION

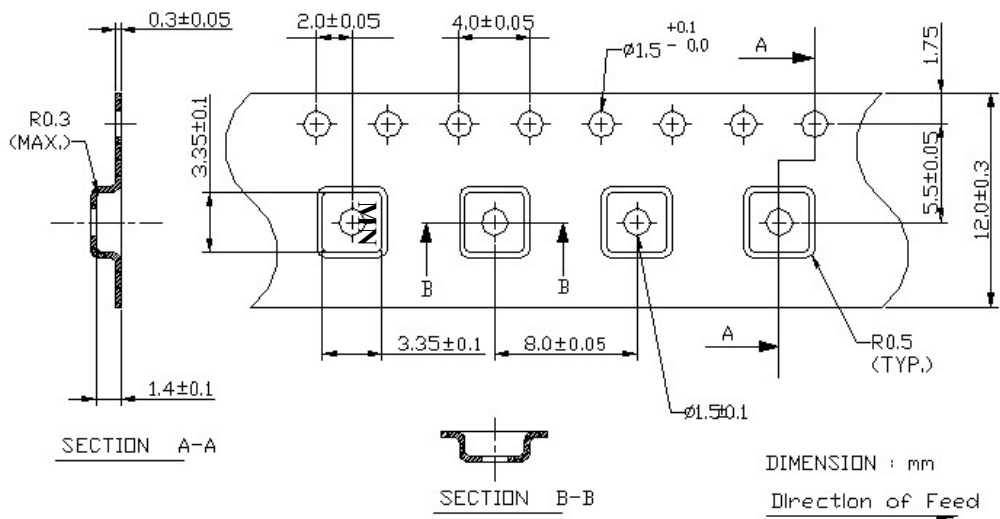

H. RECOMMENDED REFLOW PROFILE :

