



Micro Commercial Components  
 21201 Itasca Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

# MBRB1030CT THRU MBRB1045CT

## Features

- Meatl of Silicon Rectifier, Majority Conductor
- Guard ring for transient protection
- Low Forward Voltage Drop
- High Current Capability, High Efficiency
- Low Power Loss



**10 Amp  
 Schottky  
 Barrier Rectifier  
 30 to 45 Volts**

## Maximum Ratings

- Operating Temperature: -55°C to +125°C
- Storage Temperature: -55°C to +150°C

MCC Catalog Number	Maximum Reccurent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBRB1030CT	30V	21V	30V
MBRB1035CT	35V	24.5V	35V
MBRB1040CT	40V	28V	40V
MBRB1045CT	45V	31.5V	45V

## D<sup>2</sup>PAK



## Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	10 A	$T_C = 95^\circ\text{C}$
Peak Forward Surge Current	$I_{FSM}$	125A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	$V_F$	.55V	$I_{FM} = 5A;$ $T_J = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	0.5mA	$T_J = 25^\circ\text{C}$
Typical Junction Capacitance	$C_J$	200pF	Measured at 1.0MHz, $V_R=4.0V$

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.380	.421	9.65	10.69	
B	.575	.625	14.60	15.88	
C	.325	.364	8.25	9.25	
D	.045	.055	1.14	1.40	
E	.020	.045	0.51	1.14	
F	.090	.110	2.29	2.79	
G	.090	.110	2.29	2.79	
H	.080	.115	2.03	2.92	
I	.045	.055	1.14	1.40	
J	.012	.025	0.30	0.64	
K	.172	.190	4.37	4.83	

\*Pulse Test: Pulse Width 300µsec, Duty Cycle 1%

FIG.1 - FORWARD CURRENT DERATING CURVE

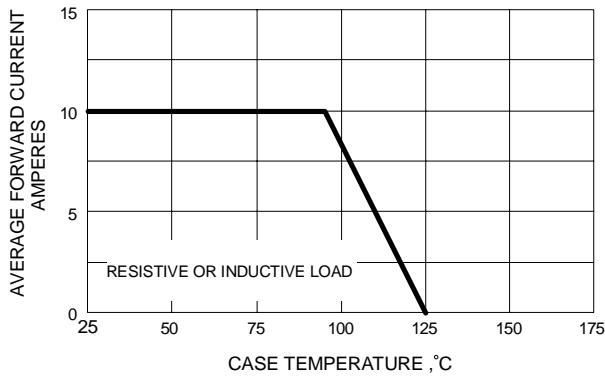


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

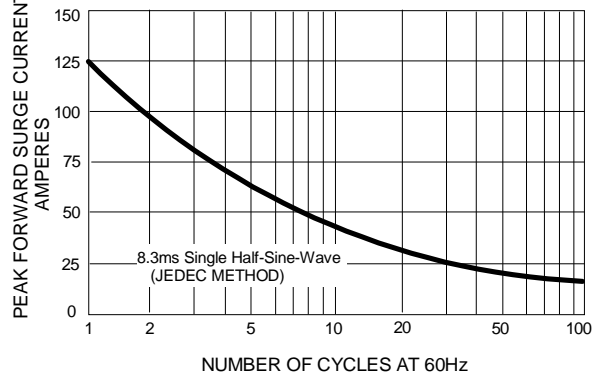


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

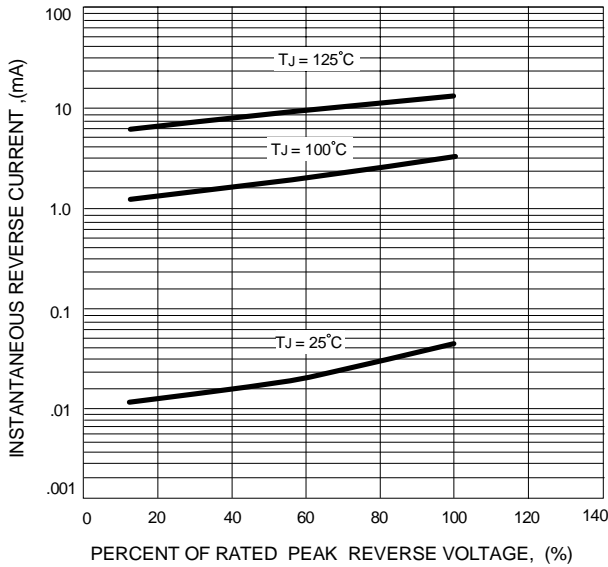


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

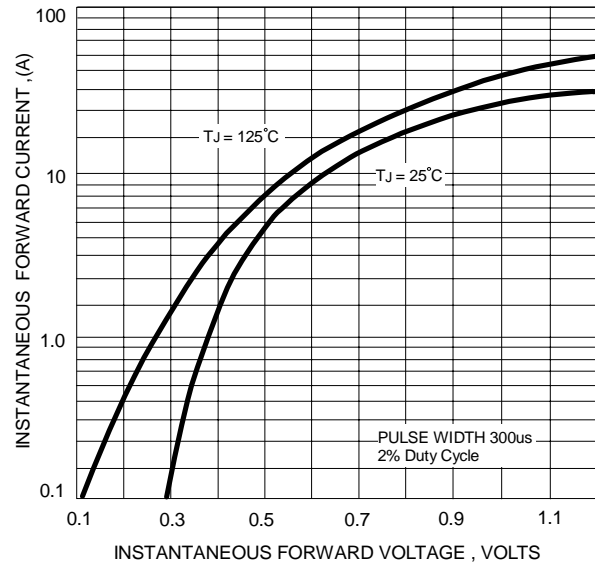


FIG.5 - TYPICAL JUNCTION CAPACITANCE

