


Test Condition: Temp=25°C±2°C Relative Humidity=65±5%

No.	Item	Specification
1	Resonant Frequency	4.1±0.5 KHz
2	Operating Volt. Range	3~16 VDC
3	Current Consumption	Max 7 mA at 12 VDC
4	Sound Pressure Level	Min 70 dB at 30cm/12VDC
5	Rated Voltage	12 VDC
6	Tone	Continuous at 12 VDC
7	Operating Temp.	-20~+70°C
8	Storage Temp.	-30~+80°C
9	Dimension	∅13.7 x H7.6 mm
10	Weight (Max)	1.0 gram
11	Material	NORYL (BLACK)
12	Terminal	Pin Type



Measuring Method
 S.P.L. Measuring Circuit
 Mic: RION S.P.L. meter UC30 or equivalent

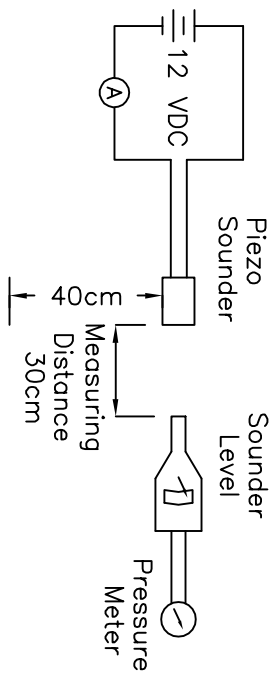

CUI INC

9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 372-1266
 Website: www.cui.com

PC FILE NAME:
cep-2242.dwg

COPYRIGHT 2001 BY CUI INC.

Tolerance: ±0.5

PART NO. CEP-2242
 DRAWN BY: Todd White
 UNITS: Millimeters
 APPROVED BY:
 SCALE: None

Piezo Audio Indicator

TITLE: