


# AZ2850

## 30 AMP MINIATURE POWER RELAY

### FEATURES

- 30 Amp switching capability
- DPST-NO and DPDT configuration
- Meets 8 mm creepage, 4 kV dielectric
- Class F construction
- PCB terminals
- Epoxy sealed version available
- UL, CUR file E44211, VDE pending



### CONTACTS

<b>Arrangement</b>	DPST (2 Form A) DPDT (2 Form C)
<b>Ratings</b>	Resistive load: Max. switched power: 560 W or 8310 VA Max. switched current: 30 A (N.O.), 3 A (N.C.) Max. switched voltage: 600 VAC or 30 VDC*  * Note: If switching voltage is greater than 30VDC, special precautions must be taken. Please contact the factory.
<b>Rated Load</b>	
<b>UL, CUR N.O.</b>	30 A at 277 VAC General Use, 100k cycles 1 Hp at 120 VAC, 100k cycles 2.5 Hp at 240 VAC, 100k cycles 110 LRA / 25.3 FLA at 240 VAC (DC coils only), 30k cycles
<b>UL, CUR N.C.</b>	3 A at 277 VAC General Use, 100k cycles
<b>Material</b>	Silver cadmium oxide or silver tin oxide
<b>Resistance</b>	<50 milliohms initially (6 V, 1 A voltage drop method)

### COIL

<b>Power</b>	
<b>At Pickup Voltage (typical)</b>	DC: 0.925 W AC: 2.6 VA
<b>Max. Continuous Dissipation</b>	DC: 5.0 W at 20°C (68°F) AC: 7.0 VA at 20°C (68°F)
<b>Temperature Rise</b>	DC: 48°C (86°F) at nominal coil voltage AC: 68°C (122°F) at nominal coil voltage
<b>Temperature</b>	Max. 155°C (311°F)

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

### GENERAL DATA

<b>Life Expectancy</b>	Minimum operations
<b>Mechanical</b>	5 x 10 <sup>7</sup>
<b>Electrical</b>	1 x 10 <sup>5</sup> at 30 A 120 VAC Res. N.O.
<b>Operate Time</b>	15 ms typical 25 ms maximum with bounce
<b>Release Time</b>	10 ms typical 25 ms maximum with bounce (with no coil suppression)
<b>Dielectric Strength (at sea level for 1 min.)</b>	1500 Vrms contact to contact 4000 Vrms contact to coil 2000 Vrms between contact sets
<b>Insulation Resistance</b>	10 <sup>9</sup> ohms minimum at 500 VDC
<b>Dropout</b>	DC: Greater than 10% of nominal coil voltage AC: Greater than 20% of nominal coil voltage
<b>Ambient Temperature</b>	At nominal coil voltage
<b>Operating</b>	DC: -40°C (-40°F) to 85°C (185°F) AC: -40°C (-40°F) to 65°C (149°F)
<b>Storage</b>	-40°C (-40°F) to 105°C (221°F)
<b>Vibration</b>	0.062" (1.5 mm) DA at 10–55 Hz
<b>Shock</b>	Operational, 10 g for 11 ms 1/2 sine pulse (no contact opening > 100usec) Non-destructive, 100 g for 11 ms 1/2 sine pulse
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	86 grams
<b>Packing unit in pcs</b>	20 per plastic tray / 100 per carton box

**ZETTLER electronics GmbH**

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0  
Fax +49 89 800 97 200

office@ZETTLERelectronics.com  
www.ZETTLERelectronics.com

2004-07-20

# AZ2850


## RELAY ORDERING DATA

COIL SPECIFICATIONS – DC Coil					ORDER NUMBER*
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Nominal Current mA $\pm 10\%$	Coil Resistance Ohm $\pm 10\%$	
6	4.5	10.5	272.0	22	AZ2850-2C-6D
12	9.0	20.7	140.0	86	AZ2850-2C-12D
24	18.0	41.8	68.5	350	AZ2850-2C-24D
48	36.0	83.4	34.5	1,390	AZ2850-2C-48D
110	82.5	190.5	15.2	7,255	AZ2850-2C-110D

COIL SPECIFICATIONS – AC Coil 50 Hz					ORDER NUMBER*
Nominal Coil VAC	Must Operate VAC	Max. Continuous VAC	Nominal Current mA $\pm 10\%$	Coil Resistance Ohm $\pm 10\%$	
12	9.6	15.6	340.0	8	AZ2850-2C-12A5
24	19.2	31.2	166.0	45	AZ2850-2C-24A5
120	96.0	156.0	33.3	1,125	AZ2850-2C-120A5
220	176.0	286.0	18.2	3,800	AZ2850-2C-220A5
240	192.0	312.0	16.7	4,500	AZ2850-2C-240A5
277	221.6	360.1	14.4	6,000	AZ2850-2C-277A5

\* Substitute "2A" in place of "2C" to indicate 2 Form A contacts. Add suffix "E" to "2A" or "2C" to indicate silver tin oxide contacts. Add suffix "E" at the end of part number for sealed version.

## MECHANICAL DATA

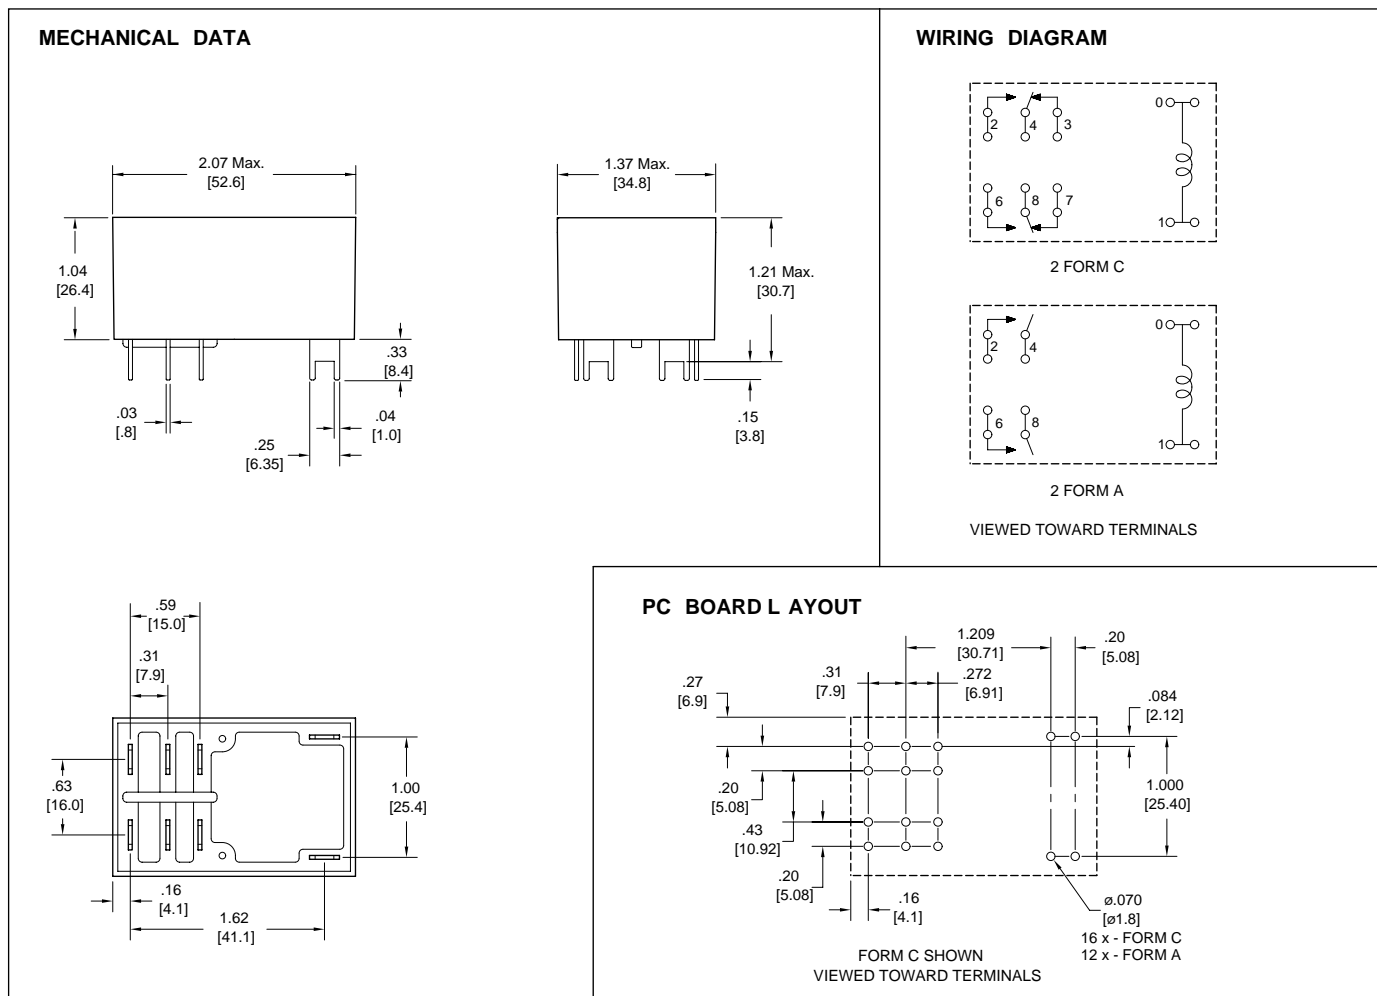

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "

## ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0

Fax +49 89 800 97 200

office@ZETTLERelectronics.com

www.ZETTLERelectronics.com

2004-07-20