

4.0" 5x7 Bi-Color Dot Matrix Display

FEATURES


- 4.0" 5x7 dot matrix display
- Grey surface/white epoxy color

OPTO-ELECTRICAL CHARACTERISTICS (Ta = 25°C)

PART NO.	EMITTED COLOR	PEAK WAVE LENGTH (nm)	MAXIMUM RATINGS			OPTO-ELECTRICAL CHARACTERISTICS						PIN-OUT		
			IF (mA)	VR (V)	PD (mW)	VF(V)			IR(μA)		IV(μcd)			
						typ.	max.	@mA	max.	@VR	typ. per seg.		@mA	
MTAN6340-AHRG	(HR)	Hi-Eff Red	635	30	5	85	4.2	6.0	20	100	5	7800	10	1
	(G)	Green	567	30	5	85	4.2	6.0	20	100	5	6800	10	1
MTAN6440-CHRG	(HR)	Hi-Eff Red	635	30	5	85	4.2	6.0	20	100	5	7800	10	2
	(G)	Green	567	30	5	85	4.2	6.0	20	100	5	6800	10	2

Operating Temperature: -25~+85, Storage Temperature: -25~+100. Other face/epoxy colors are available.

PACKAGE DIMENSIONS AND PIN FUNCTIONS

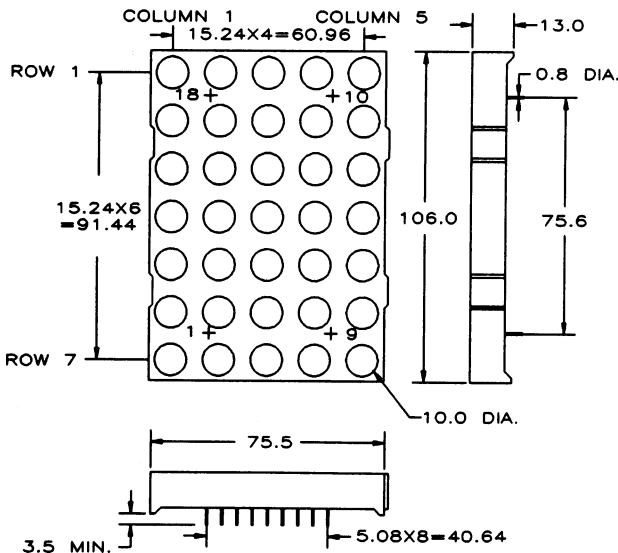

PINOUT 1

COLUMN ANODE

PIN NO. FUNCTION

1. COLUMN 1 ANODE (HR)
2. COLUMN 2 ANODE (HR)
3. COLUMN 2 ANODE (G)
4. COLUMN 3 ANODE (G)
5. ROW 6 CATHODE
6. ROW 7 CATHODE
7. COLUMN 4 ANODE (G)
8. ROW 5 CATHODE
9. NO CONNECTION
10. COLUMN 5 ANODE (HR)
11. COLUMN 5 ANODE (G)
12. COLUMN 4 ANODE (HR)
13. COLUMN 3 ANODE (HR)
14. ROW 4 CATHODE
15. ROW 2 CATHODE
16. ROW 1 CATHODE
17. ROW 3 CATHODE
18. COLUMN 1 ANODE (G)

PINOUT 2

COLUMN CATHODE

PIN NO. FUNCTION

1. COLUMN 1 CATHODE (HR)
2. COLUMN 2 CATHODE (HR)
3. COLUMN 2 CATHODE (G)
4. COLUMN 3 CATHODE (G)
5. ROW 6 ANODE
6. ROW 7 ANODE
7. COLUMN 4 CATHODE (G)
8. ROW 5 ANODE
9. NO CONNECTION
10. COLUMN 5 CATHODE (HR)
11. COLUMN 5 CATHODE (G)
12. COLUMN 4 CATHODE (HR)
13. COLUMN 3 CATHODE (HR)
14. ROW 4 ANODE
15. ROW 2 ANODE
16. ROW 1 ANODE
17. ROW 3 ANODE
18. COLUMN 1 CATHODE (G)

1. ALL DIMENSIONS ARE IN mm, TOLERANCE IS ± 0.25 mm UNLESS OTHERWISE SPECIFIED.
2. THE SLOPE ANGLE OF ANY PIN MAY BE $\pm 5.0^\circ$ MAX.



120 Broadway • Menands, New York 12204

Toll Free: (800) 98-4LEDS • Fax: (518) 432-7454

For up-to-date product info visit our web site at www.marktechopto.com

All specifications subject to change.