



HS5A THRU HS5M

5.0 AMPS. High Efficient Surface Mount Rectifiers



Voltage Range
50 to 1000 Volts
Current
5.0 Amperes


Features

- ✧ Glass passivated junction chip.
- ✧ For surface mounted application
- ✧ Low forward voltage drop
- ✧ Low profile package
- ✧ Built-in stain relief, ideal for automatic placement
- ✧ Fast switching for high efficiency
- ✧ High temperature soldering:
260°C/10 seconds at terminals
- ✧ Plastic material used carries Underwriters Laboratory Classification 94V-O

Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Terminals: Solder plated
- ✧ Polarity: Indicated by cathode band
- ✧ Packing: 16mm tape per E1A STD RS-481
- ✧ Weight: 0.21 gram

SMC/DO-214AB

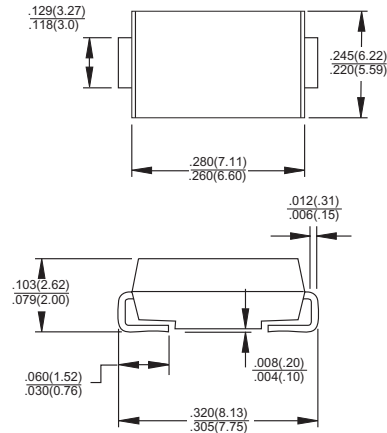

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	HS 5A	HS 5B	HS 5D	HS 5F	HS 5G	HS 5J	HS 5K	HS 5M	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current See Fig. 2	$I_{(AV)}$	5.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	150								A
Maximum Instantaneous Forward Voltage @ 5.0A	V_F	1.0		1.3		1.7			V	
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=100^\circ\text{C}$	I_R	10.0 200								μA μA
Maximum Reverse Recovery Time (Note 1)	T_{rr}	50				75			nS	
Typical Junction Capacitance (Note 2)	C_j	80				50			pF	
Maximum Thermal Resistance (Note 3)	$R_{\theta JA}$	60								$^\circ\text{C}/\text{W}$
Operating Temperature Range	T_J	-55 to +150								$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150								$^\circ\text{C}$

Notes: 1. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$

2. Measured at 1 MHz and Applied $V_R=4.0$ Volts

3. Mounted on P.C.B. with 0.6"x0.6" (16 x 16 mm) Copper Pad Areas.

RATINGS AND CHARACTERISTIC CURVES (HS5A THRU HS5M)

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

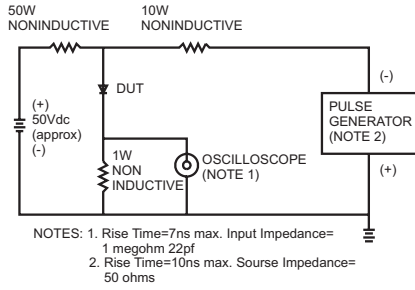


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

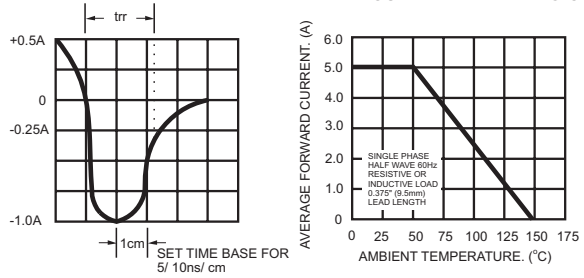


FIG.3- TYPICAL REVERSE CHARACTERISTICS

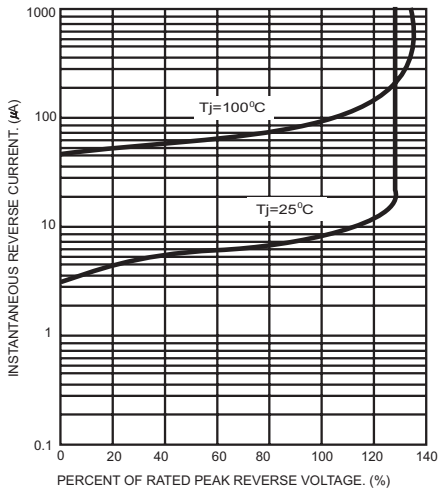


FIG.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

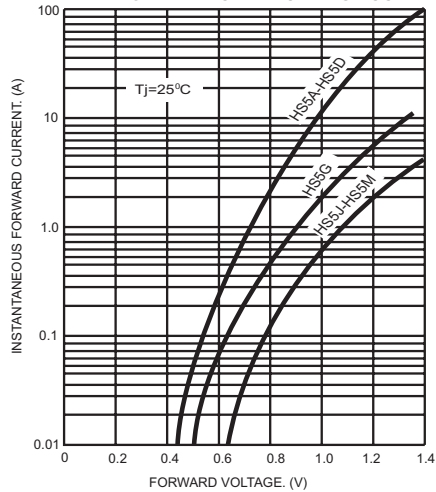


FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

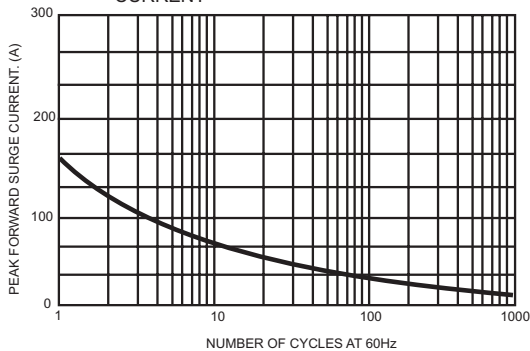


FIG.6- TYPICAL JUNCTION CAPACITANCE

