


PATENT PENDING

## 4 Times Higher Luminous Efficiency (than Xenon Lamp and Halogen Lamp) White, Point Light Source with 7500 K Color Temperature

### FEATURES

- **High Luminous Efficiency : 76 lm/W**  
About 4 times higher luminous efficiency than Xenon lamp and Halogen lamp (20 to 25 lm/W)
- **White light, Excellent Color Rendering :7500 K Color Temperature**  
Similar color temperature to sun light  
(Illumination Metal Halide Lamp : Approx. 4500 K)
- **Long Life : 3000 hours (Expectancy)**  
Long life of 3000 hours in spite of compact short-arc type
- **Short Arc : Arc Gap 5 mm**  
Easy optical designing because of point light source
- **Compact Size : Overall Length 76 mm**

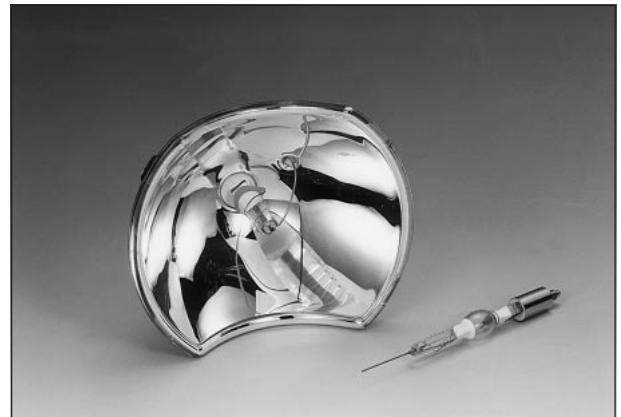

▲ Center : L4342-01, Right : L4342

### APPLICATIONS

- Liquid Crystal Projector
- Over Head Projector
- Light Source for Fiber
- Film/Slide Projector
- Color Printer
- Microscope

### CHARACTERISTICS COMPARISON AMONG VARIOUS LAMPS


Parameter	Short-Arc Type Metal Halide Lamp (150 W)		Halogen Lamp (150 W)		Xenon Lamp (150 W)	
	Quality	Value	Quality	Value	Quality	Value
Luminous Efficiency (lm/W)	Excellent	76	Fair	20	Fair	25
Color Temperature (K)	Excellent	7500	Fiar	3200	Good	6500
Life (Expectancy) (hours)	Excellent	3000	Poor	200	Good	1000
Compactness	Excellent		Excellent		Fair	
Safety	Excellent		Excellent		Fair	

Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions.

Specifications are subjected to change without notice. No patent rights are granted to any of the circuits described herein. © 1997 Hamamatsu Photonics K. K.


● Comparison of Spectral Distribution

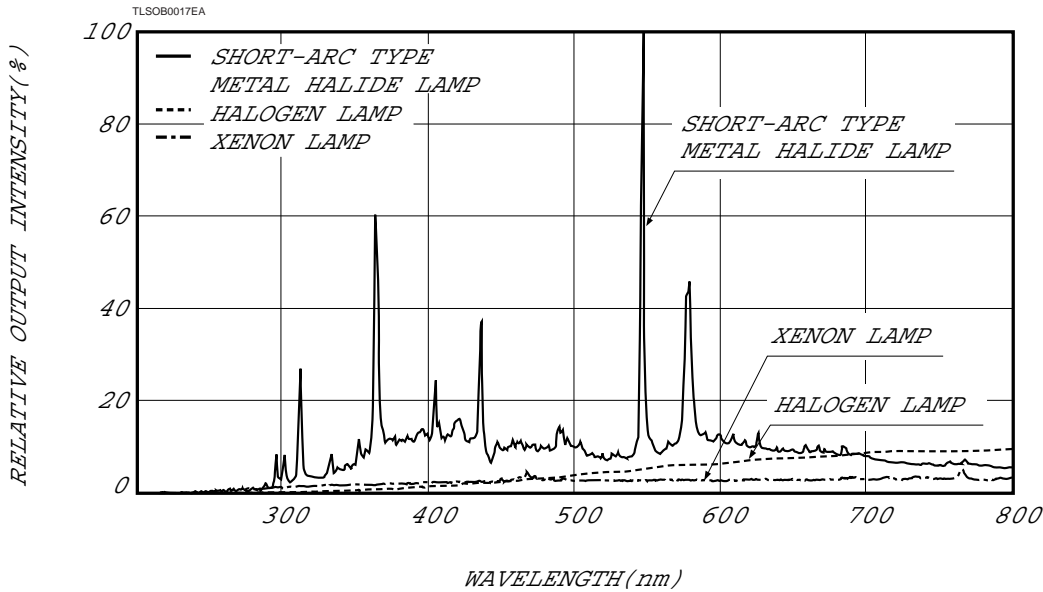

SPECIFICATIONS

Lamp Power	150W
Lamp Voltage	80Vac
Lamp Current	1.9 Aac
Luminous Flux	11,400 lm
Luminous Efficiency	76 lm/W
Color Temperature	7500 K
Arc Gap	5.0 mm
Life (Expectancy)	3000 hours

DIMENSIONAL OUTLINE (Unit:mm)

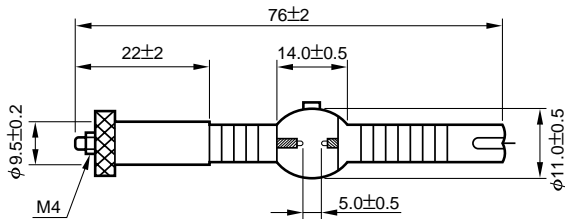

TL50A0013EE

\* PATENT PENDING : JAPAN 17, USA 4, EUROPE 4

**HAMAMATSU**

HAMAMATSU PHOTONICS K.K., Electron Tube Center  
 314-5, Shimokanzo, Toyooka-village, Iwata-gun, Shizuoka-ken, 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205, Telex: 4225-186HAMAHQ

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218  
 Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658  
 France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10  
 United Kingdom: Hamamatsu Photonics UK Limited: Lough Point, 2 Gladbeck Way, Windmill Hill, Enfield, Middlesex EN2 7JA, United Kingdom, Telephone: (44)181-367-3560, Fax: (44)181-367-6384  
 North Europe: Hamamatsu Photonics Norden AB: Färögatan 7, S-164-40 Kista, Sweden, Telephone: (46)8-703-29-50, Fax: (46)8-750-58-95  
 Italy: Hamamatsu Photonics Italia S.R.L.: Via Della Moia, 1/E 20020 Arese, (Milano), Italy, Telephone: (39)2-935 81 733, Fax: (39)2-935 81 741